

ZOLARIS
— LUMINAIRE —

INDOOR ARCHITECTURAL
LED COLLECTION

Modern Interior Lighting Solutions



Hexagonal Systems



Linear Pendants



Downlights



Decorative Indoor Lighting

DESIGN • INNOVATE • ILLUMINATE

The background image shows a modern interior space with warm, ambient lighting. The walls are covered in vertical wood slats, and the ceiling features recessed linear lighting. A large potted plant is visible on the left, and a curved white wall with a built-in shelf and another plant is on the right. The floor is a light-colored, reflective material.

About ZOLARIS Luminaire

ZOLARIS Luminaire is a lighting brand specialized in modern indoor architectural LED lighting, custom-made luminaires, luxury lighting solutions, and project-based lighting systems.

Our indoor architectural range is designed for spaces where lighting is not only functional, but also part of the interior design identity. From hotels, villas, offices, showrooms, restaurants, retail spaces, and commercial buildings, ZOLARIS Luminaire provides lighting solutions that enhance ambience, comfort, and architectural character.

The collection covers a wide range of indoor LED products, including linear lighting systems, downlights, spotlights, pendant lights, wall lights, cove lighting, profile lighting, decorative luminaires, and customized lighting elements for special projects.

With strong expertise in lighting technology, design flexibility, and project customization, our professional engineering team works closely with consultants, architects, interior designers, contractors, and project owners to provide suitable lighting selections, technical support, and tailored solutions for modern and luxury interiors.


ZOLARIS Luminaire combines innovation, energy efficiency, aesthetics, and engineering experience to deliver indoor architectural lighting solutions that meet both technical and design requirements.

The image shows a sophisticated interior design, likely a lobby or reception area. The ceiling is a focal point, featuring a series of hexagonal recessed light fixtures with warm, golden-yellow LED lighting. The walls are a mix of light-colored marble and dark wood paneling, with vertical light strips integrated into the design. In the foreground, there's a white, angular reception desk. To the right, a lounge area includes a curved white sofa, a dark leather armchair, and a round, metallic coffee table with a marble top. Large potted plants are placed throughout the space, adding a touch of nature. The overall atmosphere is one of modern elegance and high-end architectural lighting.


Welcome to the ZOLARIS Luminaire Collection

Step into a curated journey of indoor architectural lighting, where design, technology, and ambience come together. This catalogue presents modern LED solutions for luxury interiors, commercial spaces, hospitality projects, offices, showrooms, and custom architectural applications.


Explore. Design. Illuminate.

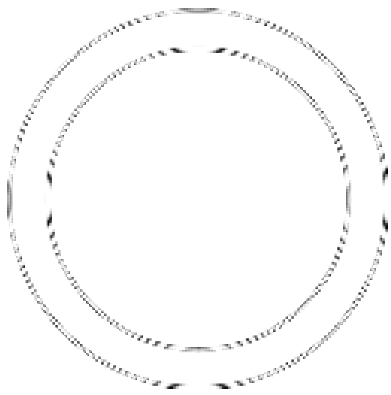


LYRA - 06

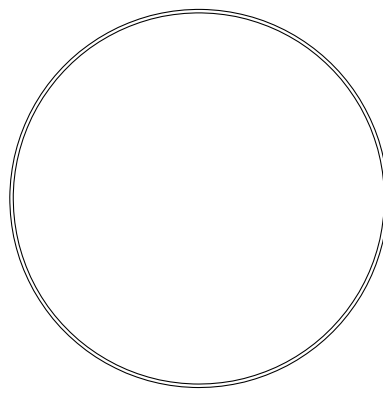


CRUX - 12




AQUILA - 16

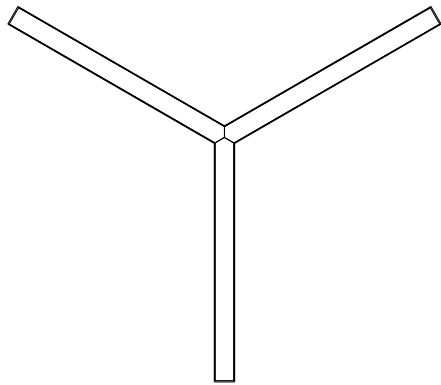


VIRGO - 25

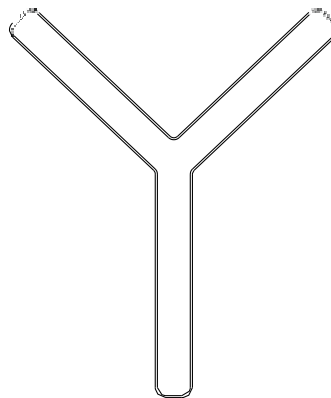


LEPUS - 31

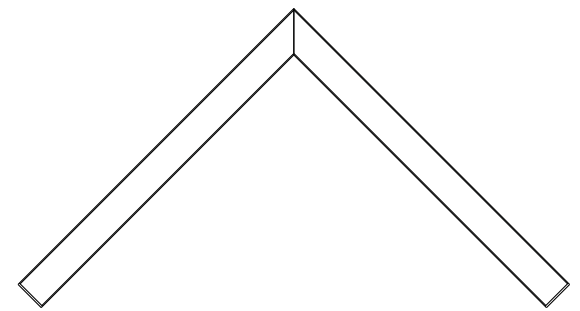

CETUS - 35



LEO - 39

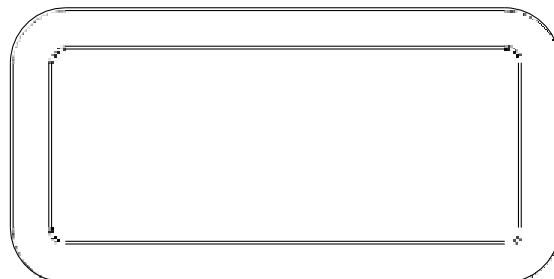

TAURUS - 43




CARINA - 48

INDEX




CYGNUS - 52

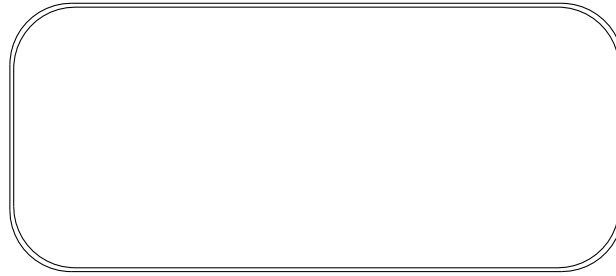


CORVUS - 58




GRUS - 63

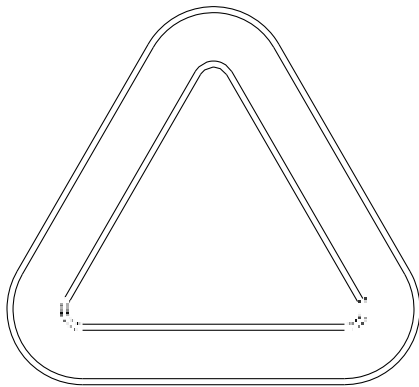


LYNX - 66

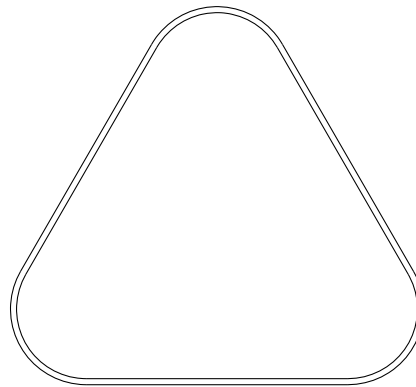


DRACO - 71

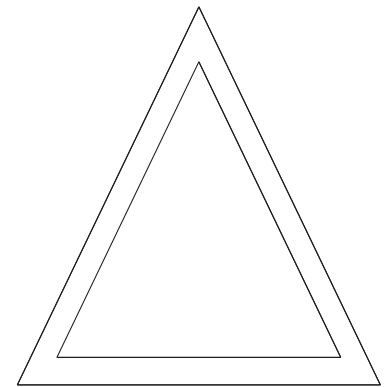


GEMINI - 74

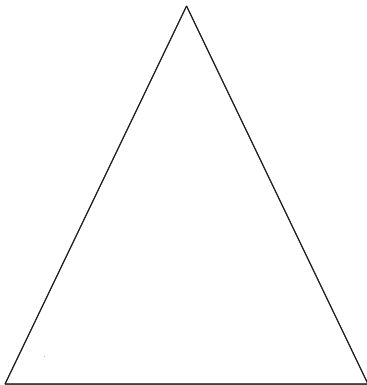


AURIGA - 77

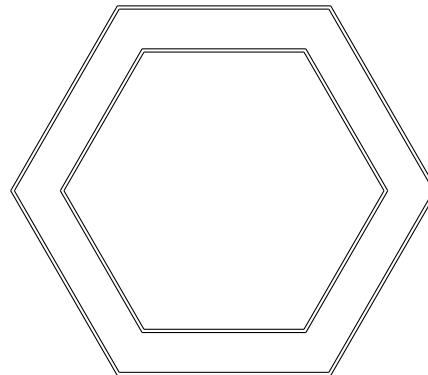

ORION - 79

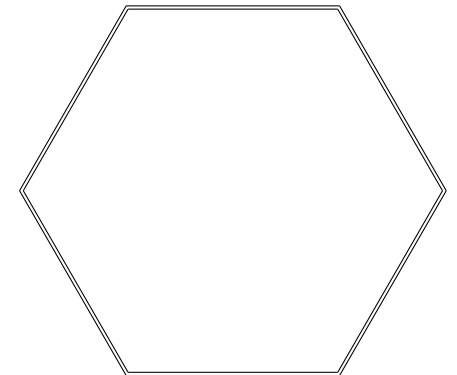

VELA - 84

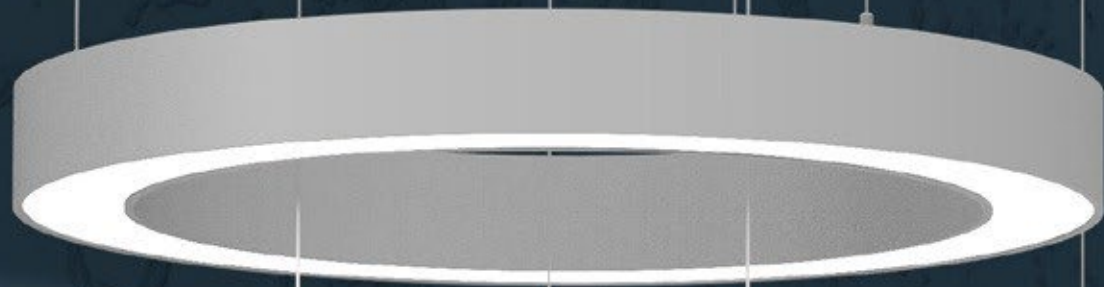



Technical Specifications

Luminaire Specs: Power: Outer Diameter-A (m) x 40/50/60/75
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended

LED Module: LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient


Power Supply: Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9

Housing: Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating





Technical Drawing

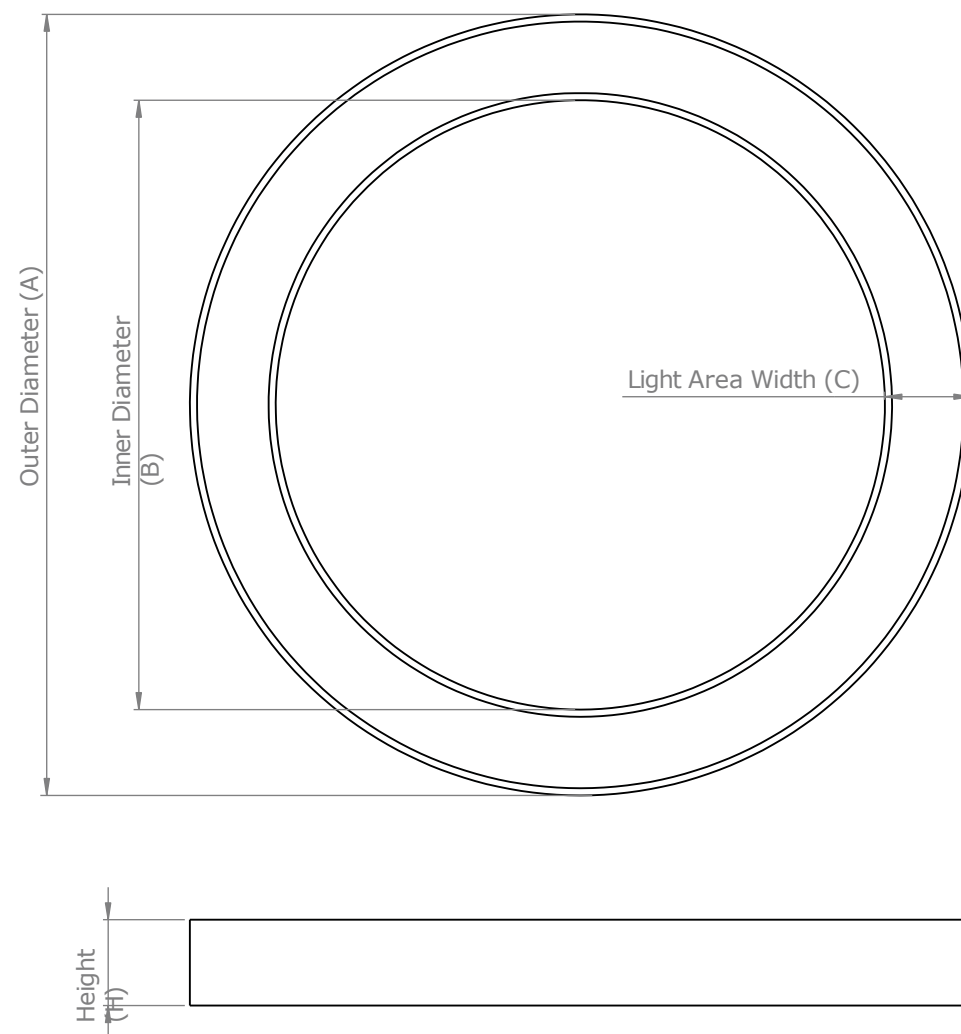

Outer Diameter (A)	Customized (Min. 300mm / Max. 1500mm)
Inner Diameter (B)	Customized (Min. 300mm / Max. 1450mm)
Light Area Width (C)	Customized (Min. 50mm / Max. 250mm)
Fixture Height (H)	A: 50mm / B: 70mm / C: 100mm









Technical Specifications

Luminaire Specs: Power: Outer Diameter-A (m) x 40/50/60/80/100
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended



LED Module: LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient


Power Supply: Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9

Housing: Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating



Outer Diameter (A)	Customized (Min. 300mm / Max. 1200mm)
Fixture Height (H)	A: 50mm / B: 70mm / C: 100mm

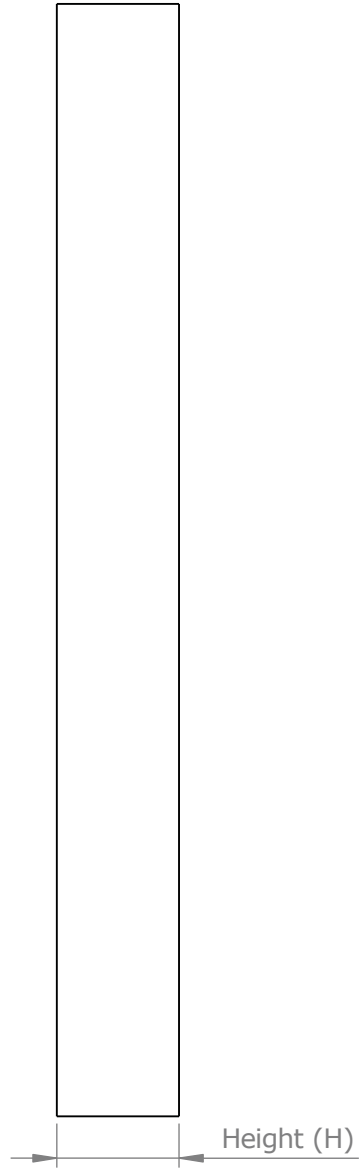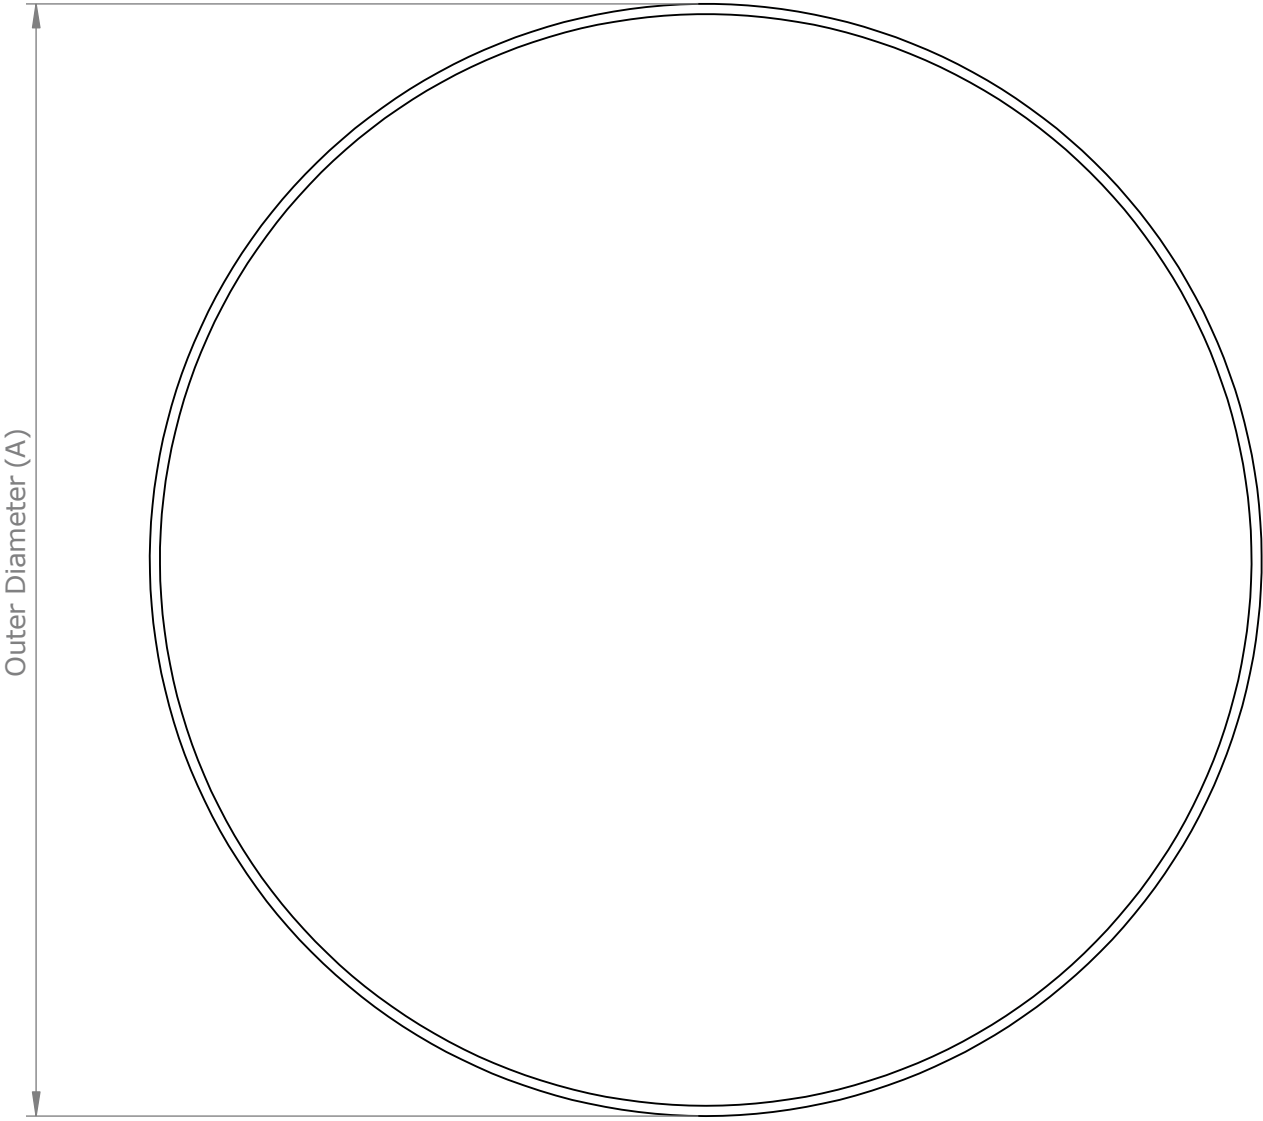

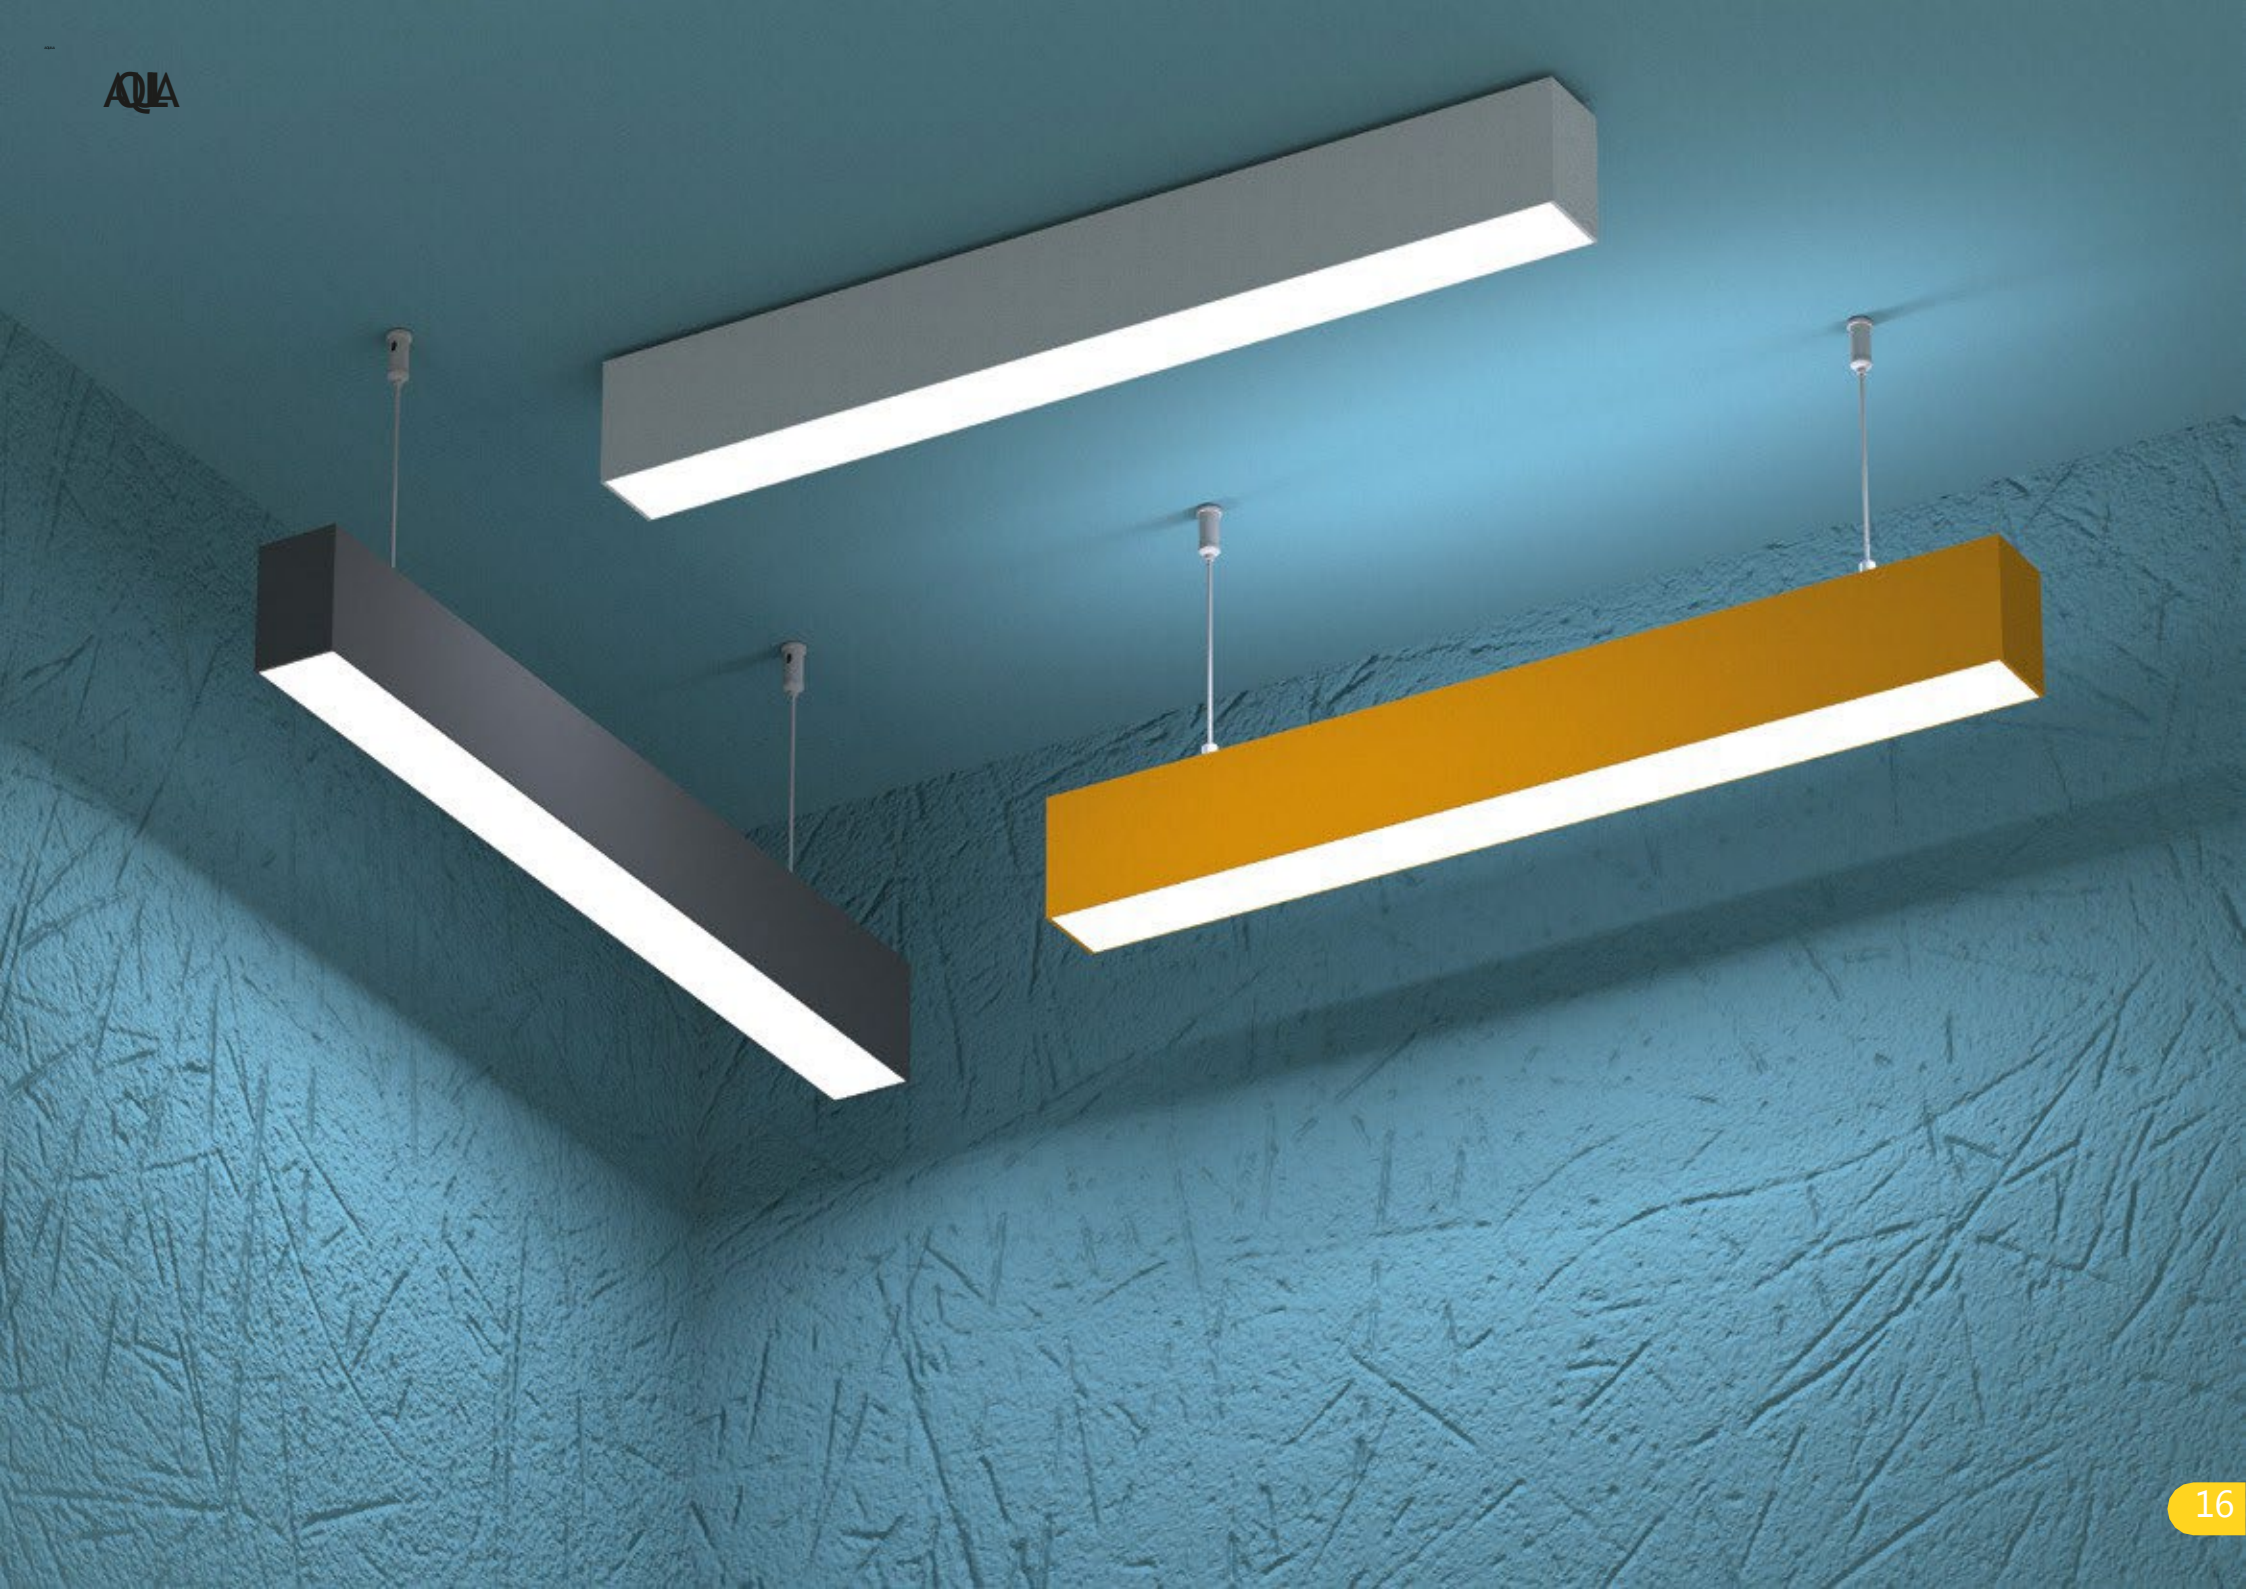




Technical Specifications

Luminaire Specs: Power: 10/15/20/25/30/35/40 W/m
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended


LED Module: LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient

Power Supply: Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9

Housing: Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating

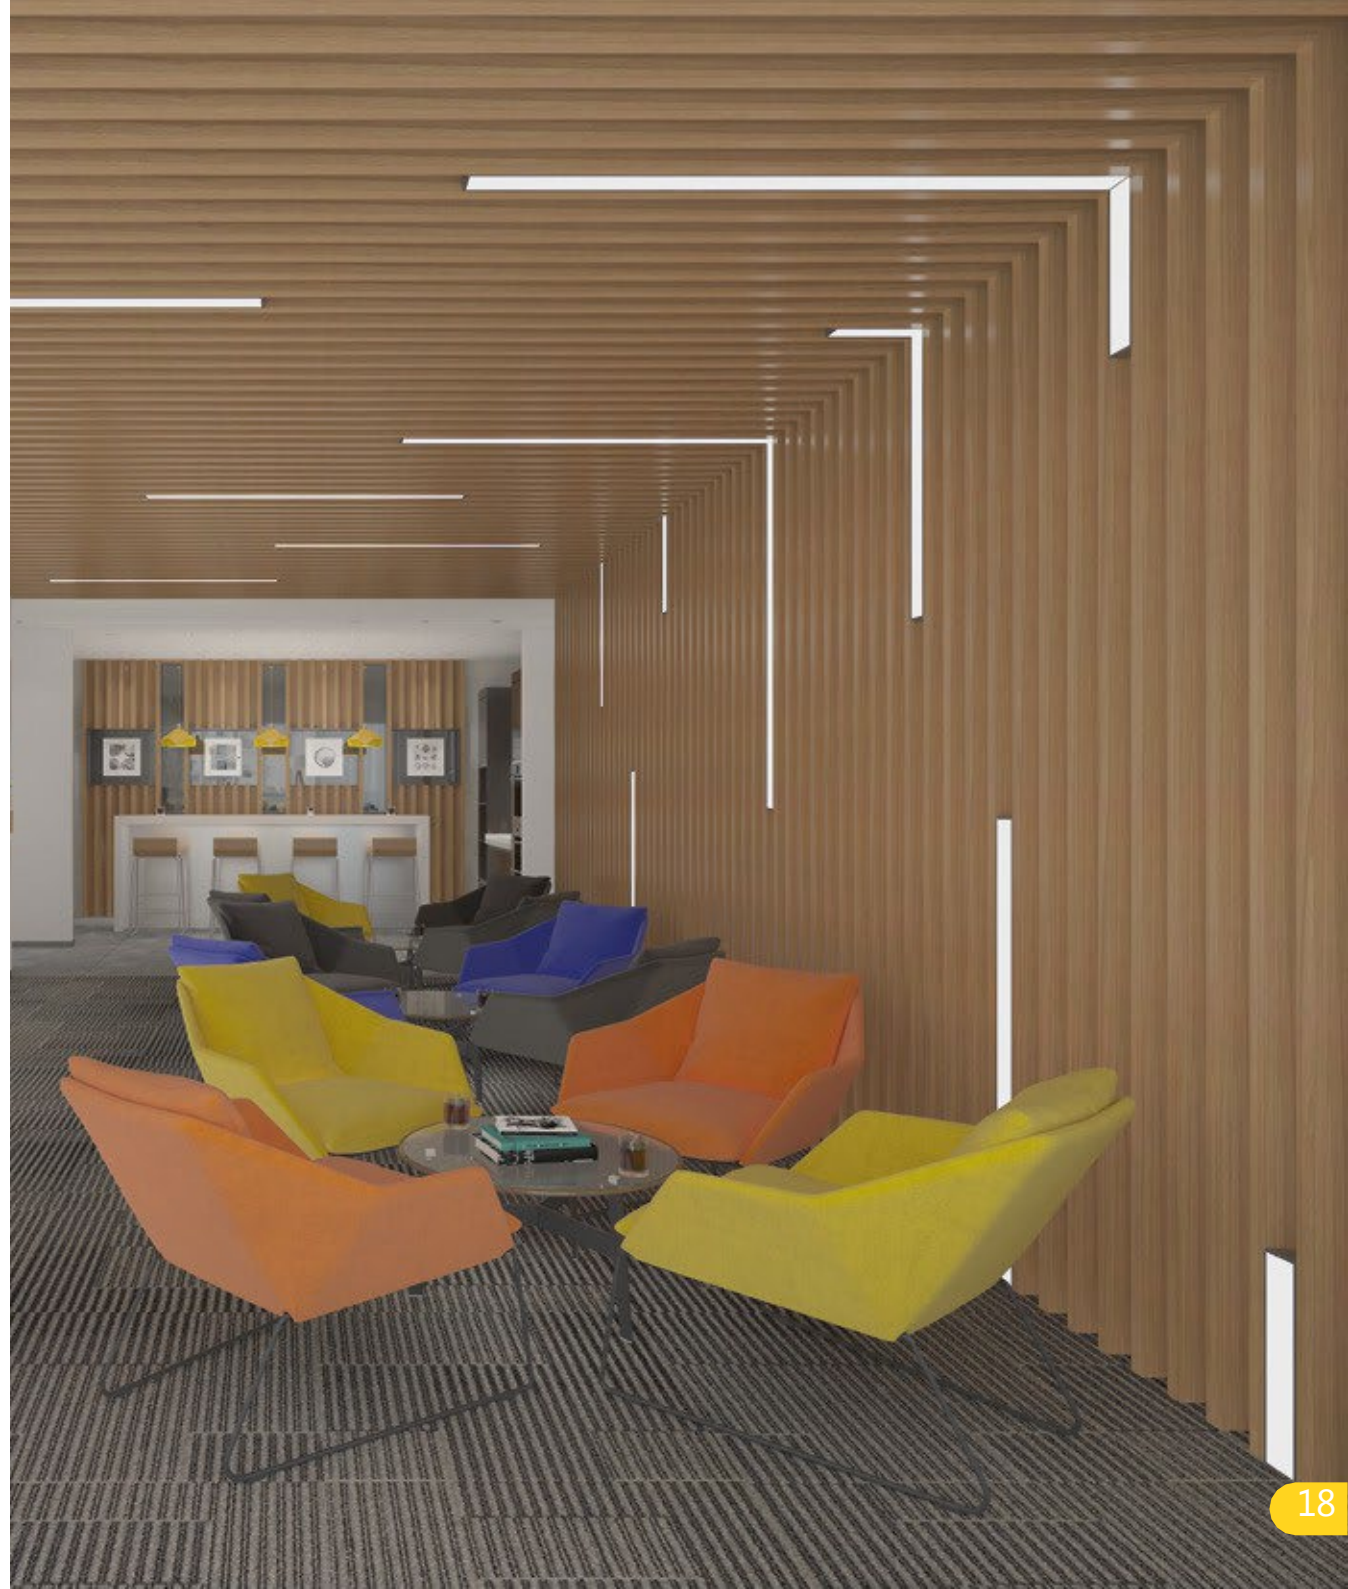


Product Detail View

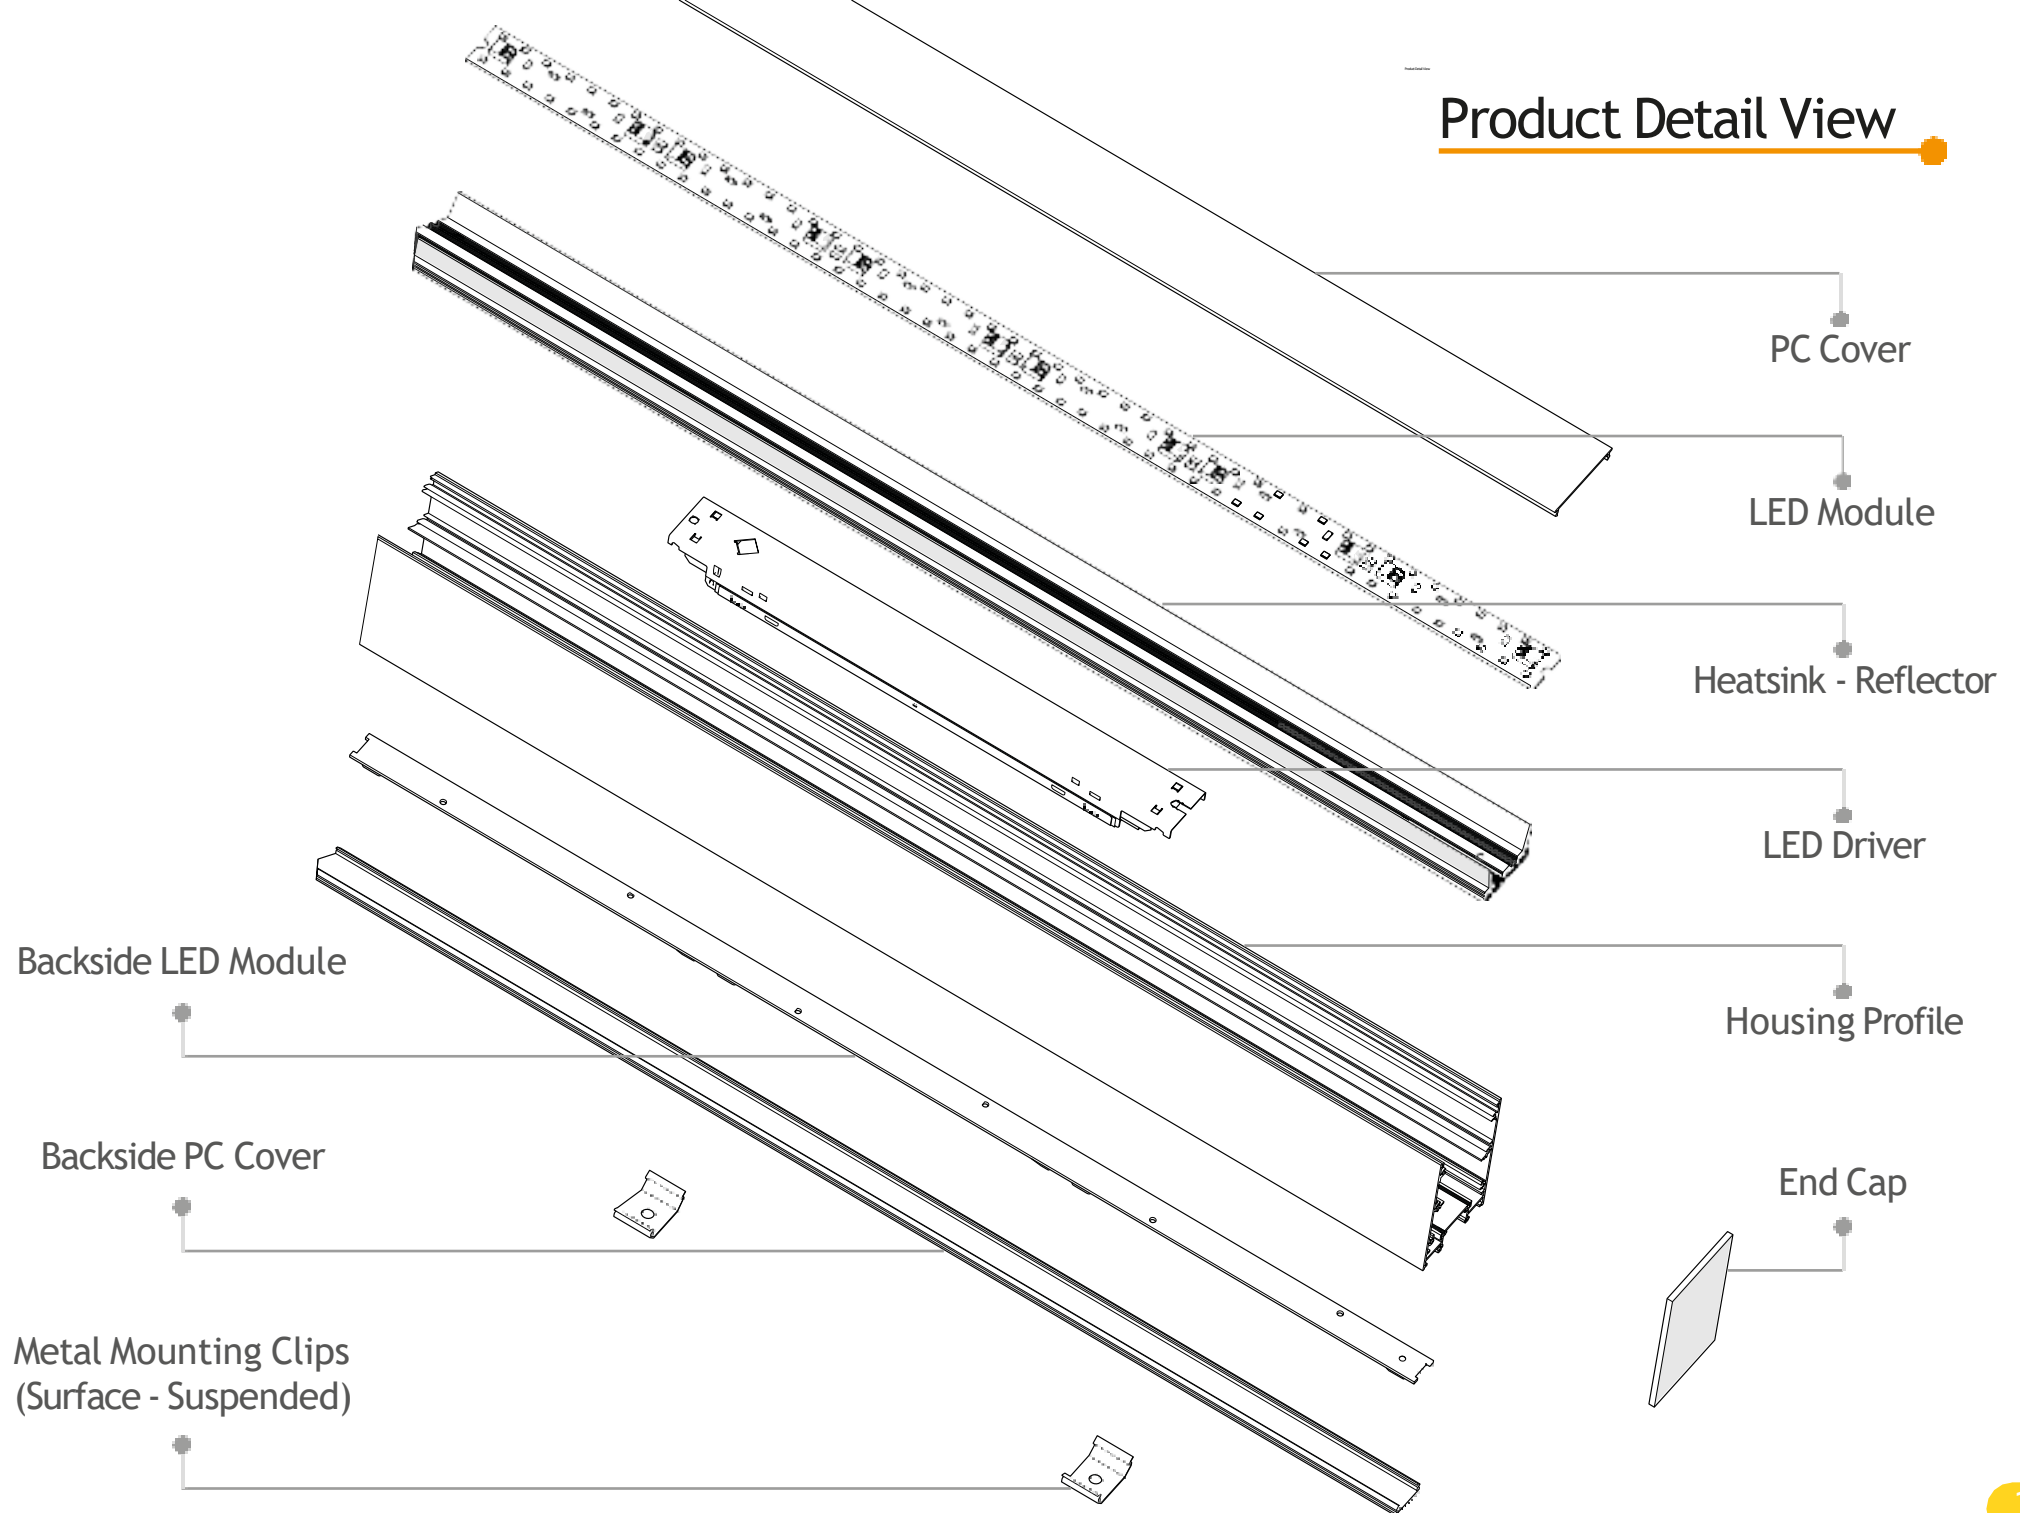


Continuous Lighting Systems


STRAIGHT JOINT

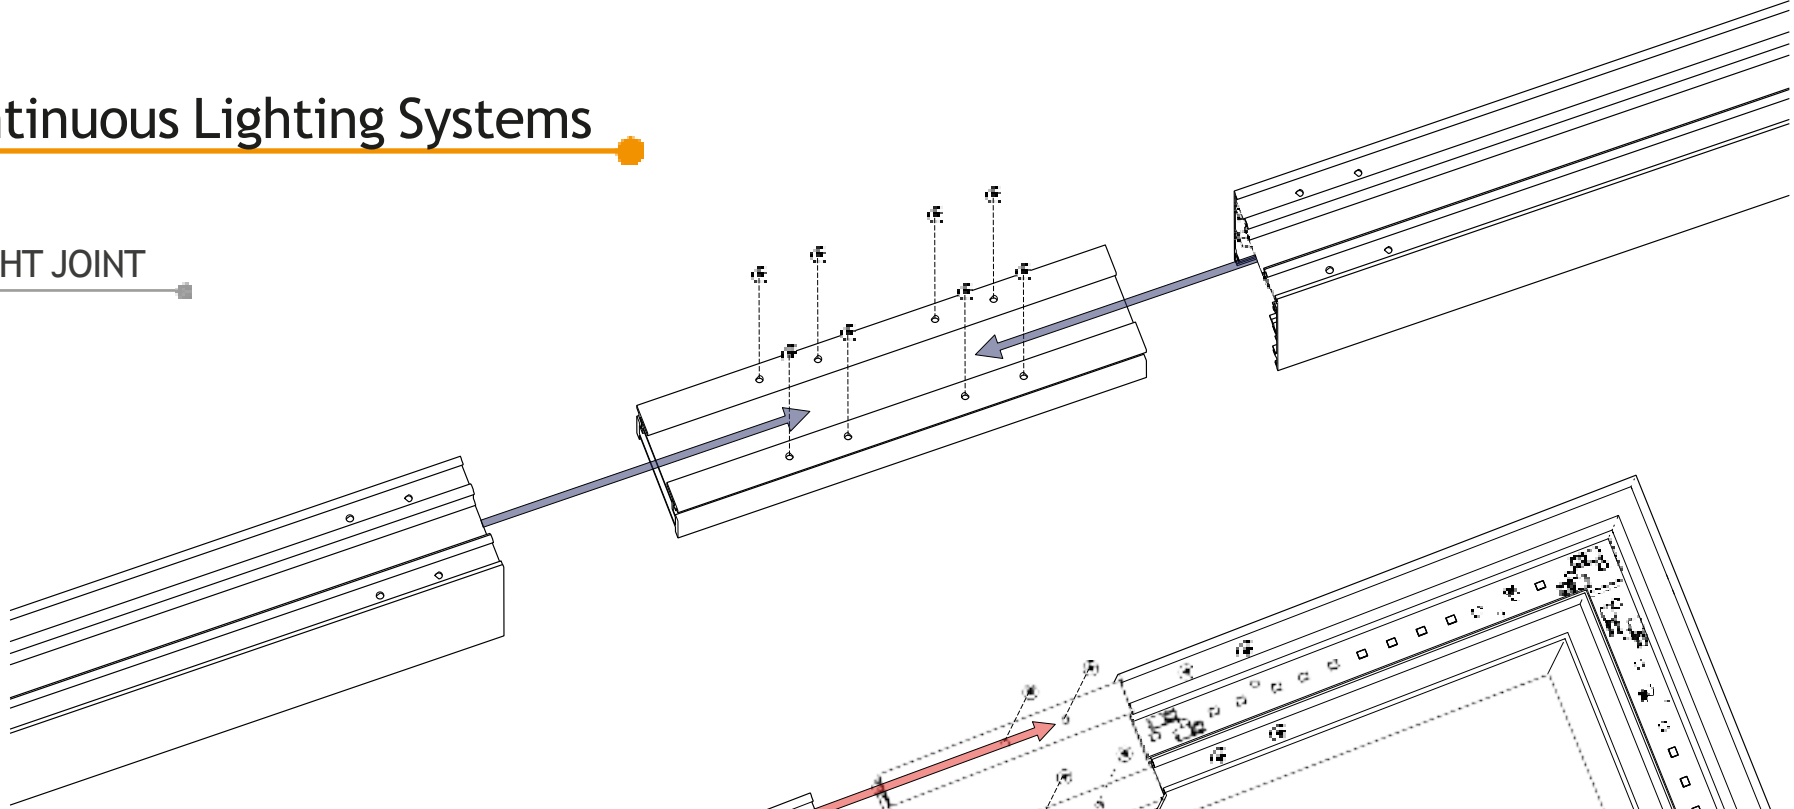

90 DEGREE JOINT

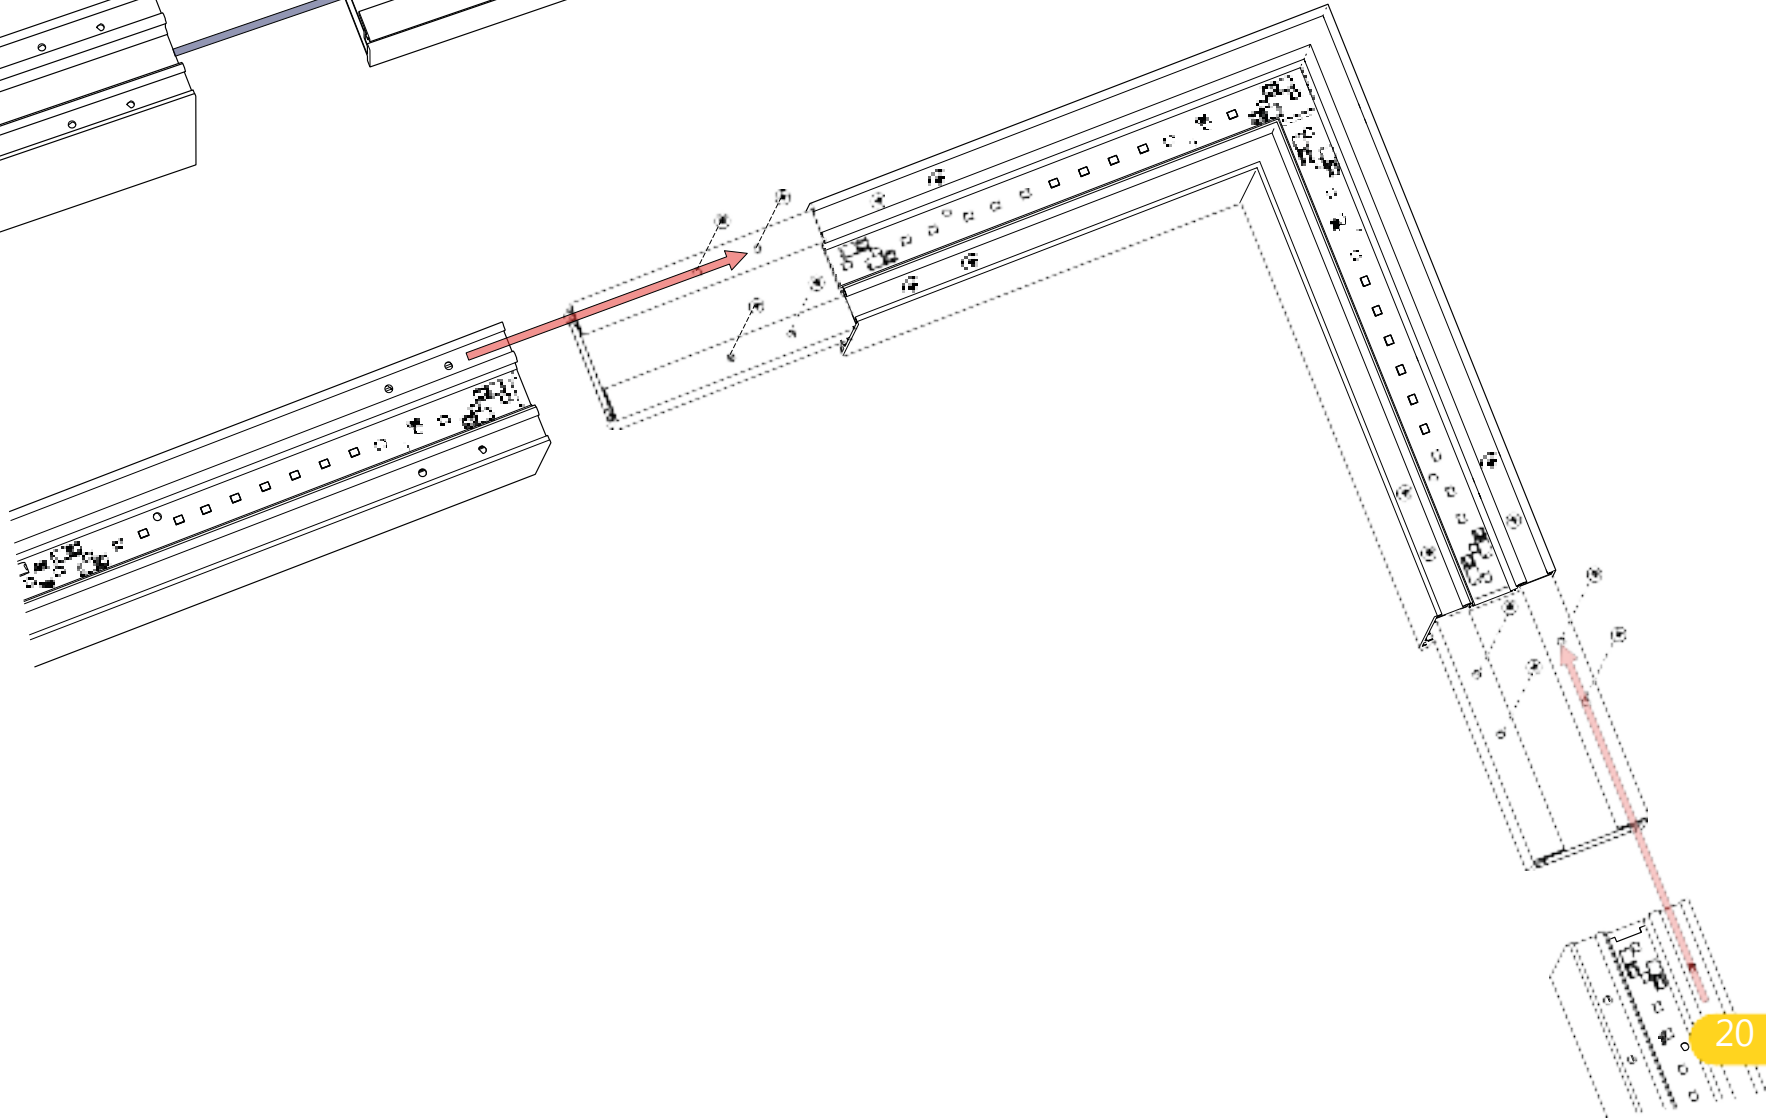


T-SHAPE JOINT

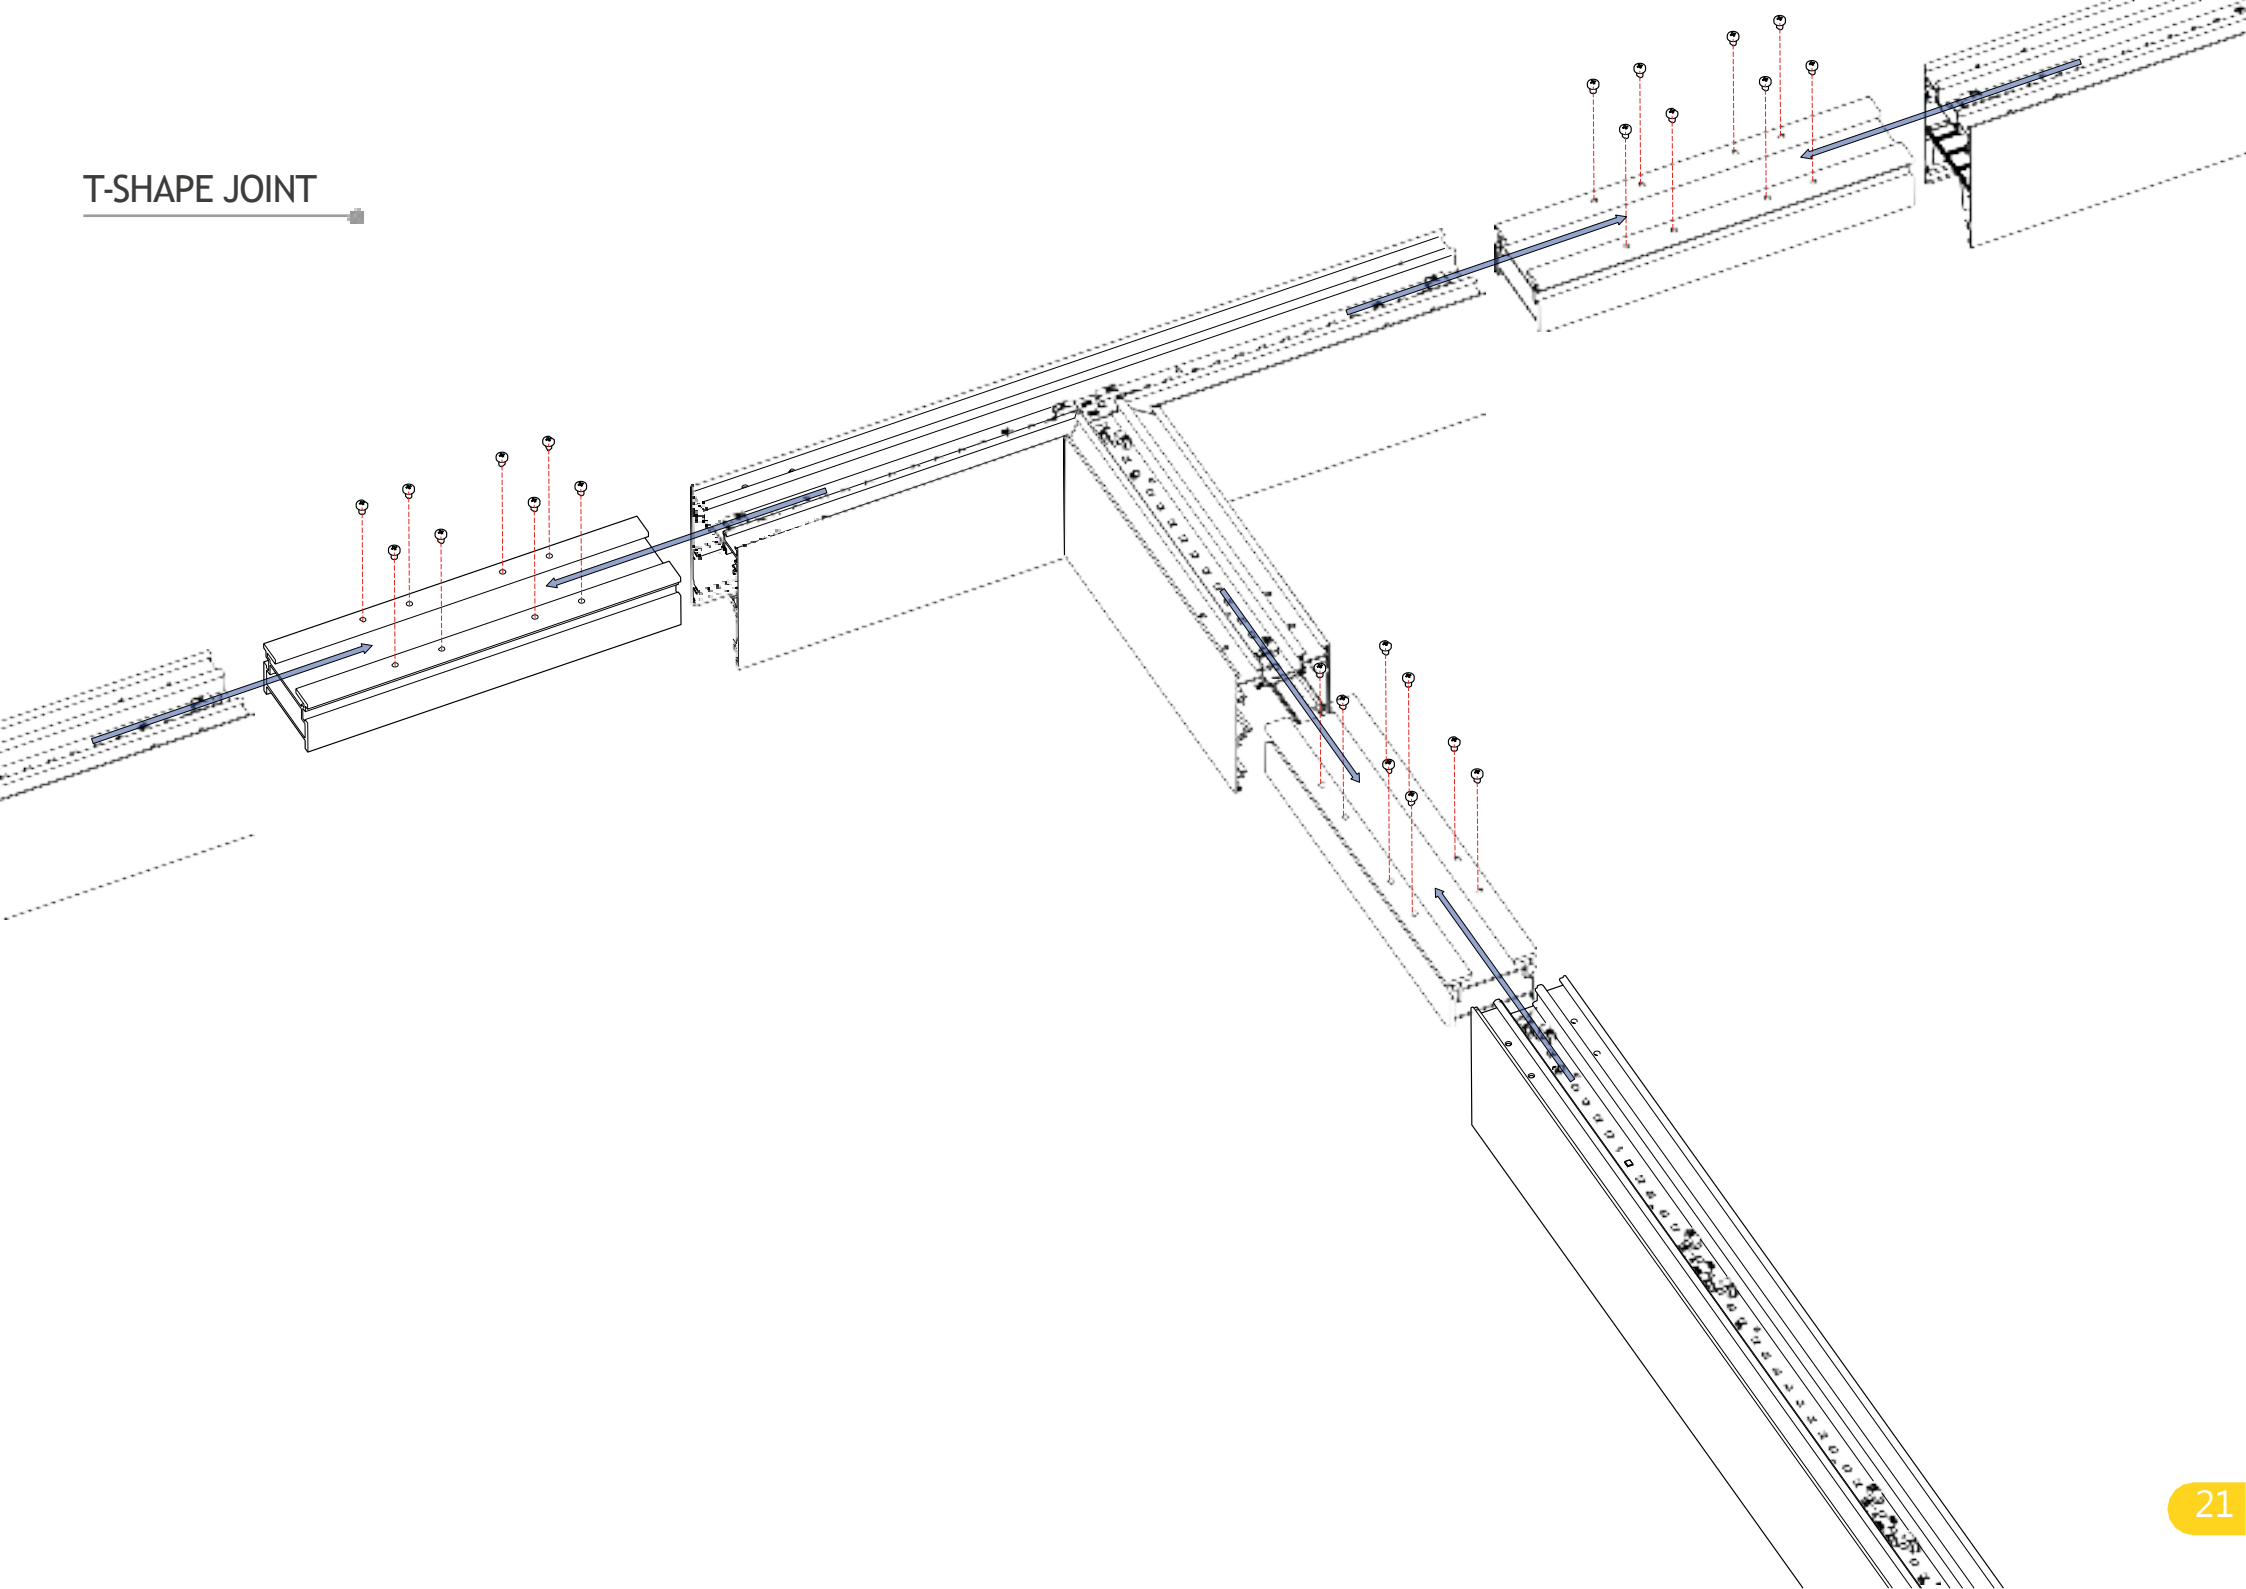







Technical Drawing



Continuous Lighting Metal Joint

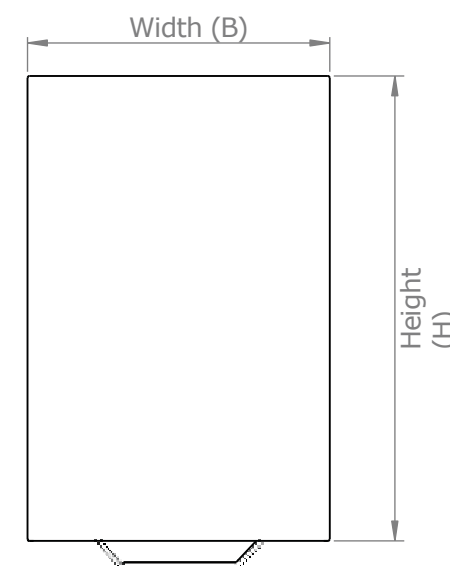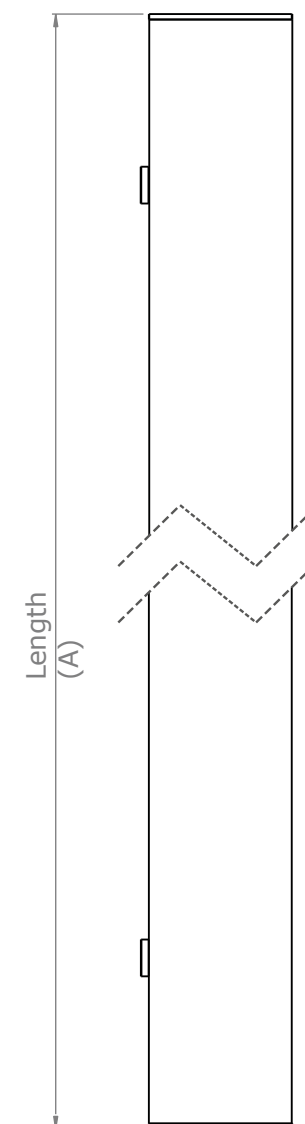

Length (A) Customized (Min. 300mm / Max. ∞)

Width (B) 50,8mm

Fixture Height (H) 78mm





VIRGO



Technical Specifications



Luminaire Specs: Power: 10/15/20/25/30/35/40 W/m
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended

LED Module: LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient

Power Supply: Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9

Housing: Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating



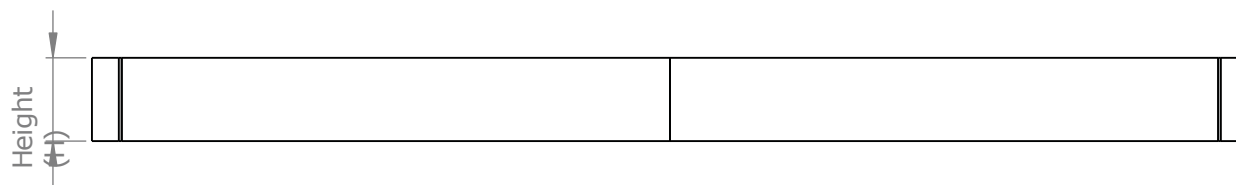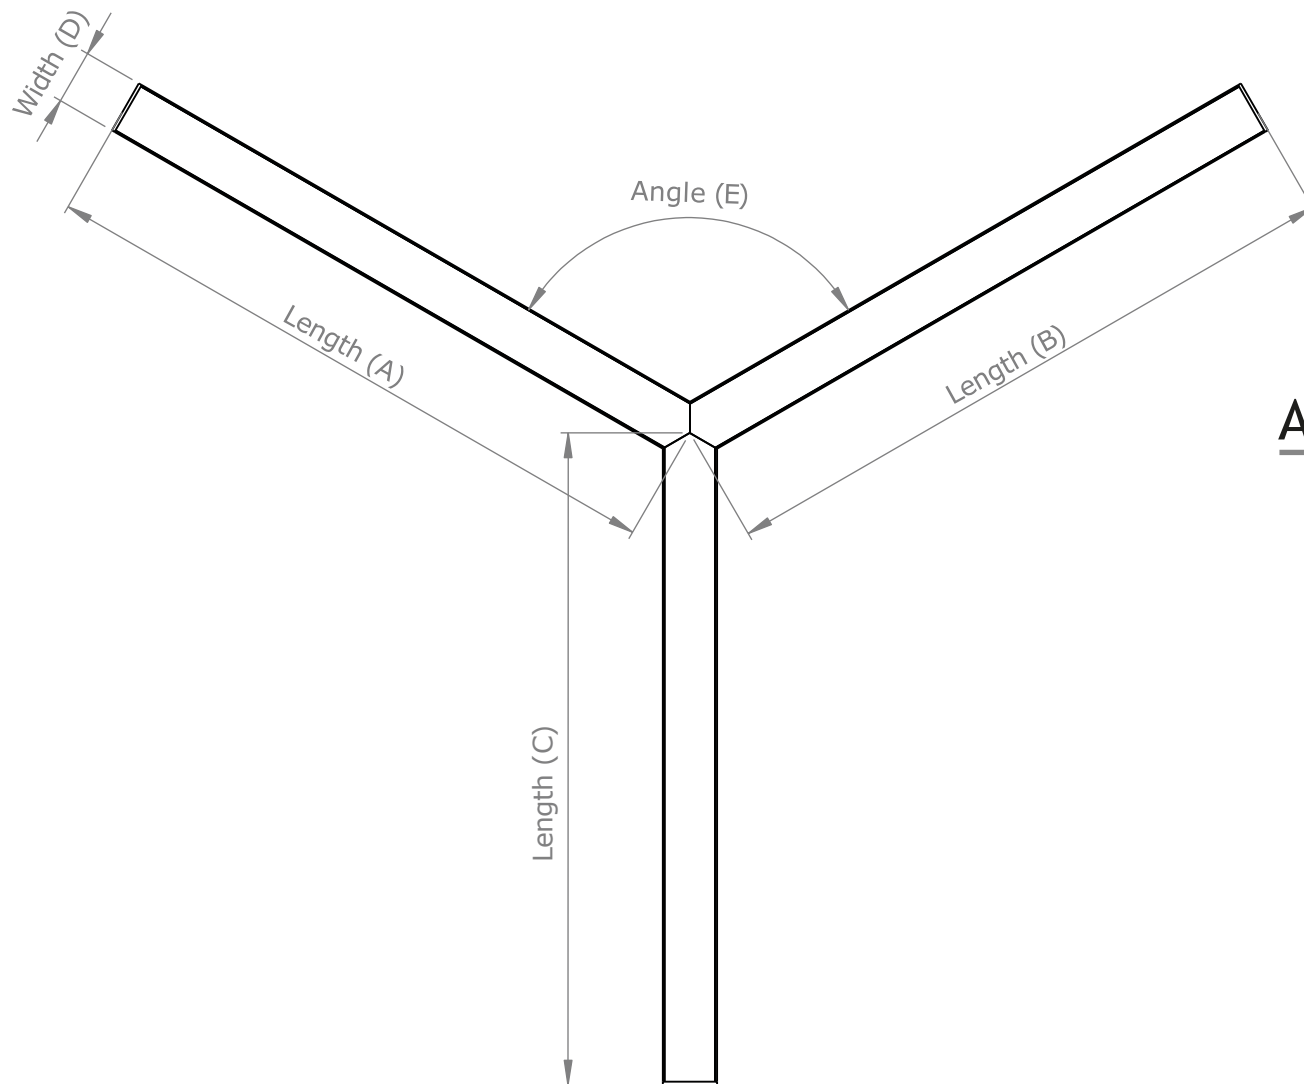

Accessories



X6
Metal Mounting Clips



X6
Mounting Screw




X6
Anchor



X6
Steel Hanging Cord
Max. Height: 1.5Meter
Height Adjustable

Length (A/B/C)	Customized (Min. 300mm / Max. 5000mm)
Width (D)	50,8mm
Angle (E)	60° / 90° / 120°
Fixture Height (H)	78mm


Product Detail View

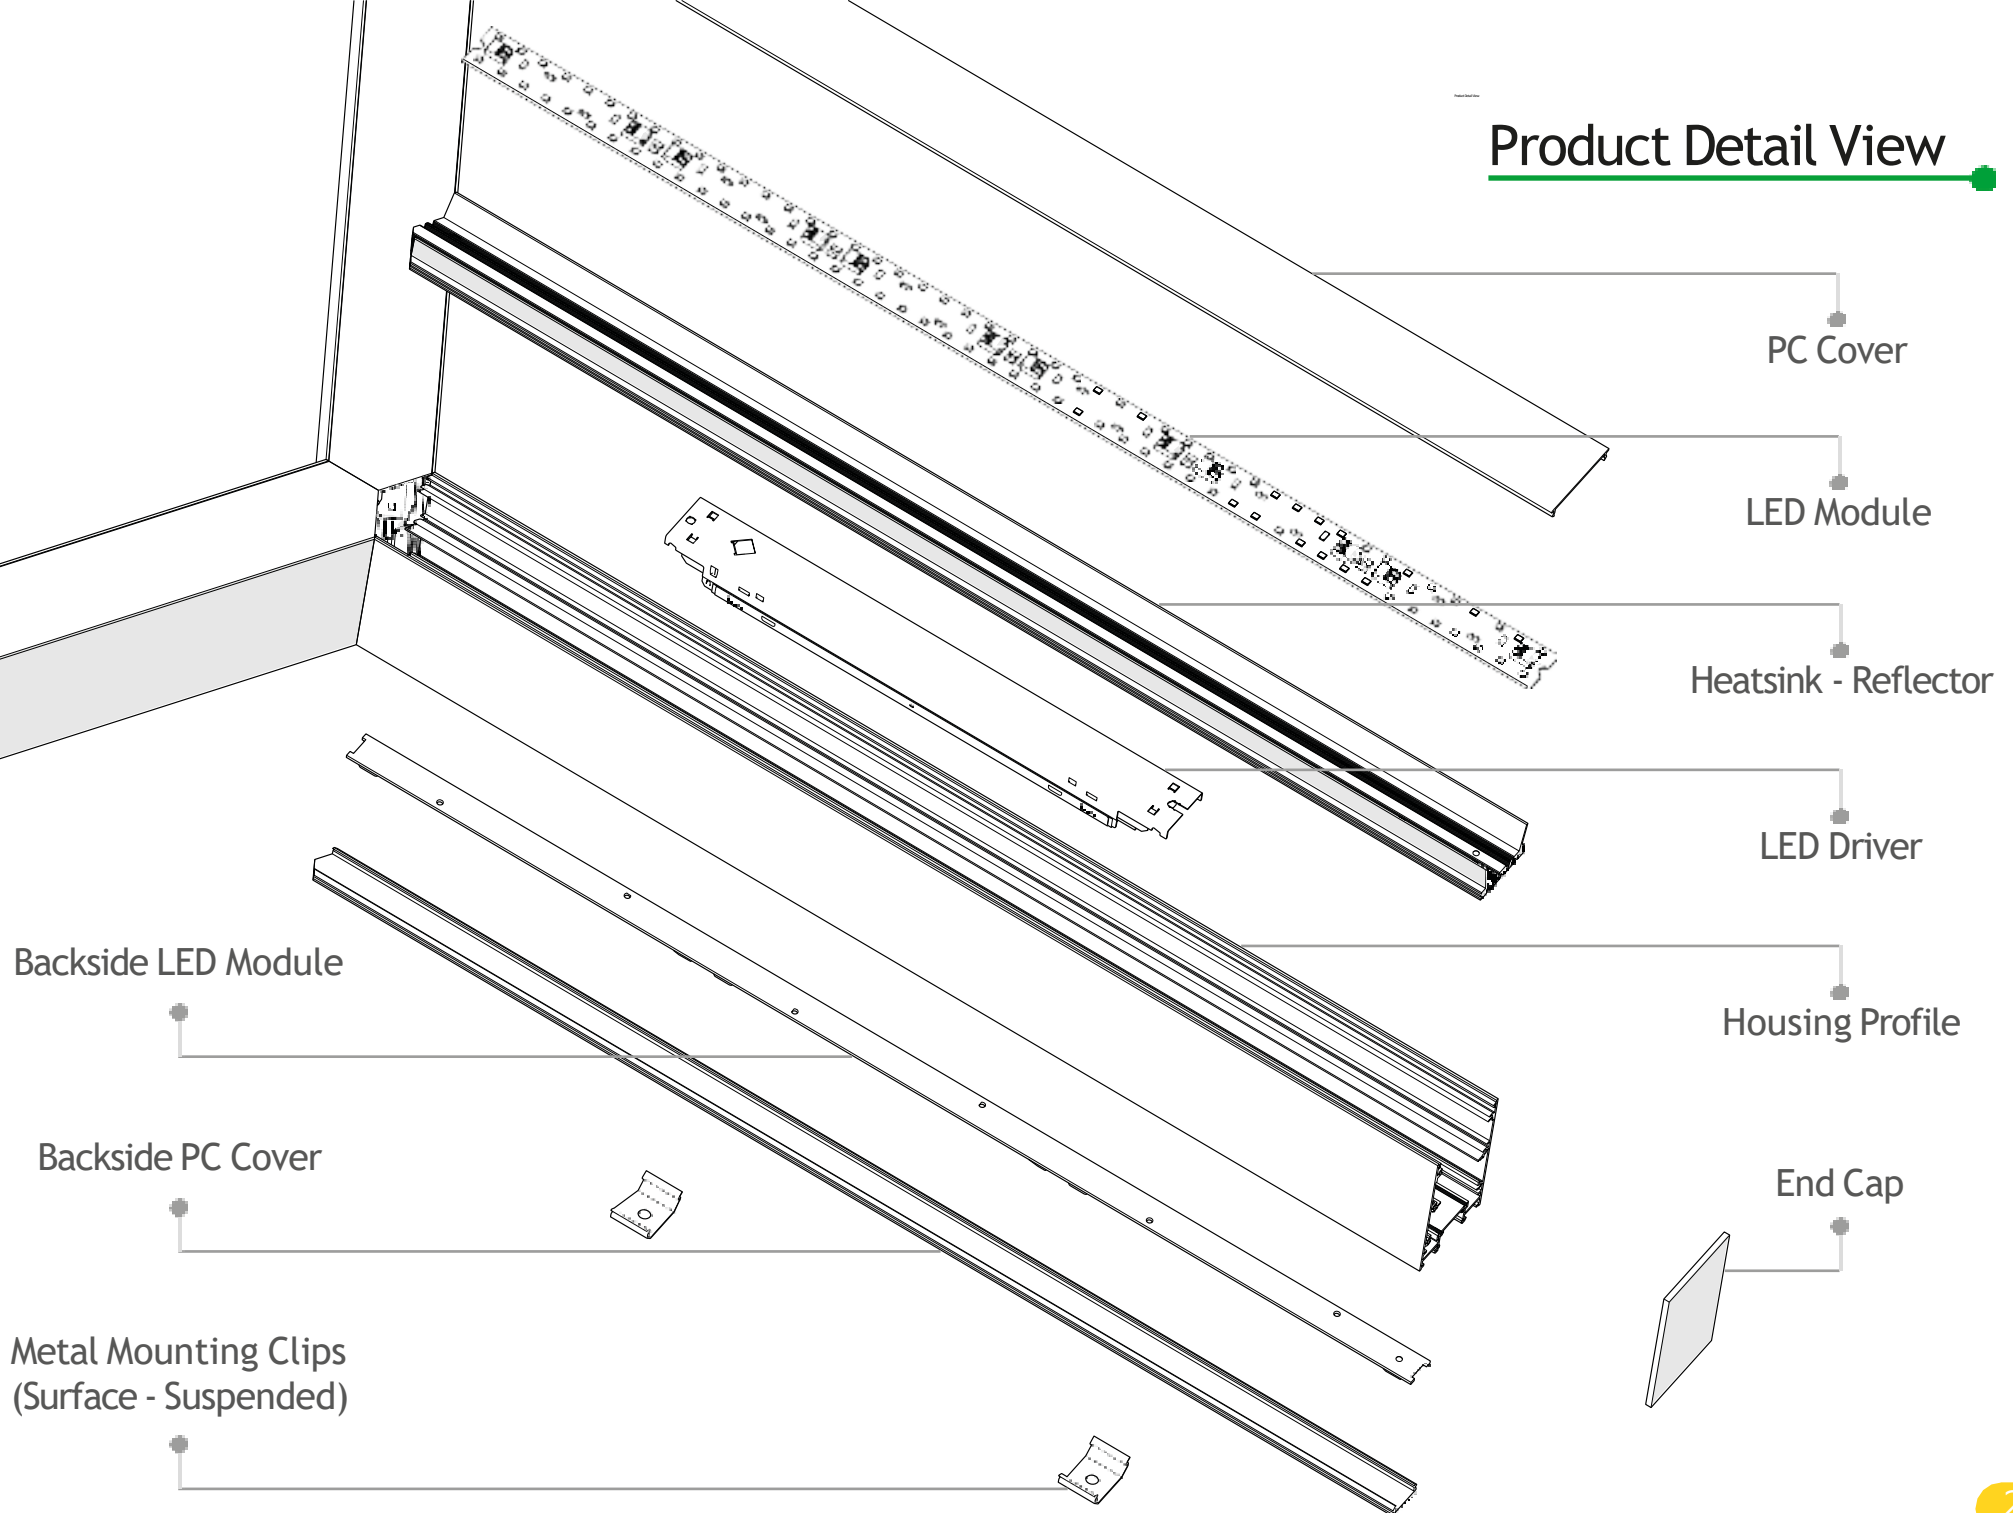

Installation Instructions


STEP - 1

First Step Starts with Drilling Holes in Roof. Please Ensure Wall Anchor Diameter Before Drilling Hole to Avoid any Problem During Lighting Fixture Mounting.

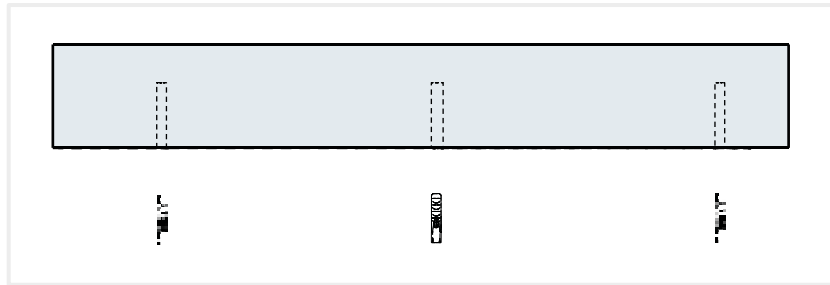


STEP - 2

Second Step is to Fasten Metal Mounting Clips Between the two Parts of Steel Cord as Shown in the Detailed View Inside Circle.

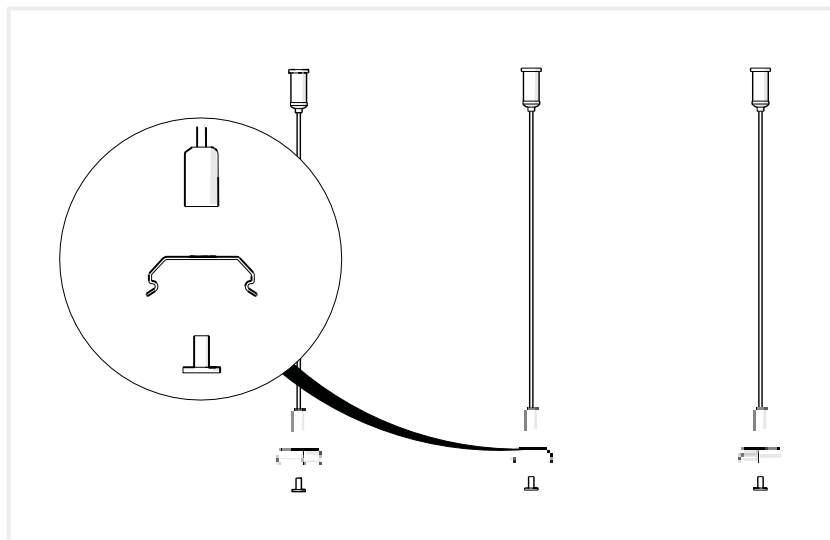


STEP - 3


Next Step is to Mount Steel Cord Inside Wall Anchor with Screw as Shown Inside Circle and Close the Steel Cord Cap.

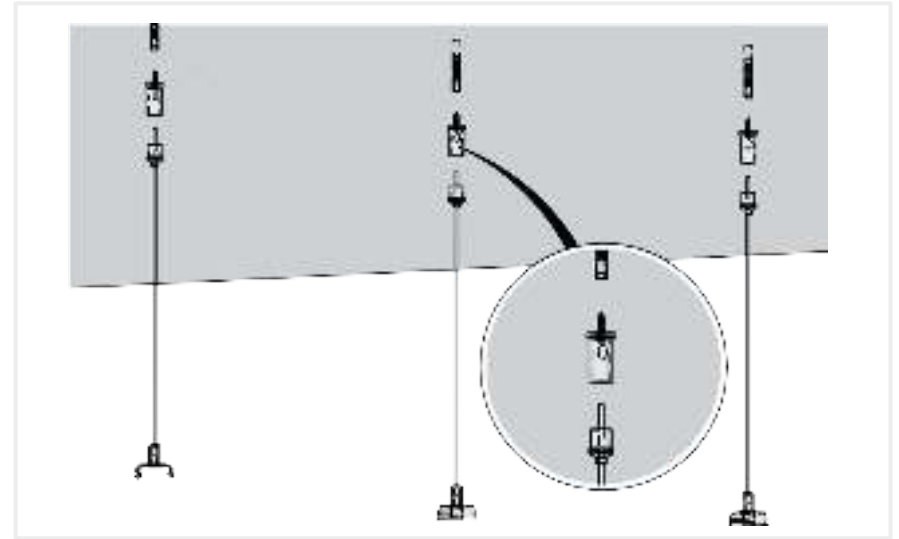

STEP - 4

Last Step is to Fix Mounting Clips on the Back Side of Fixture as Shown Inside Circle.

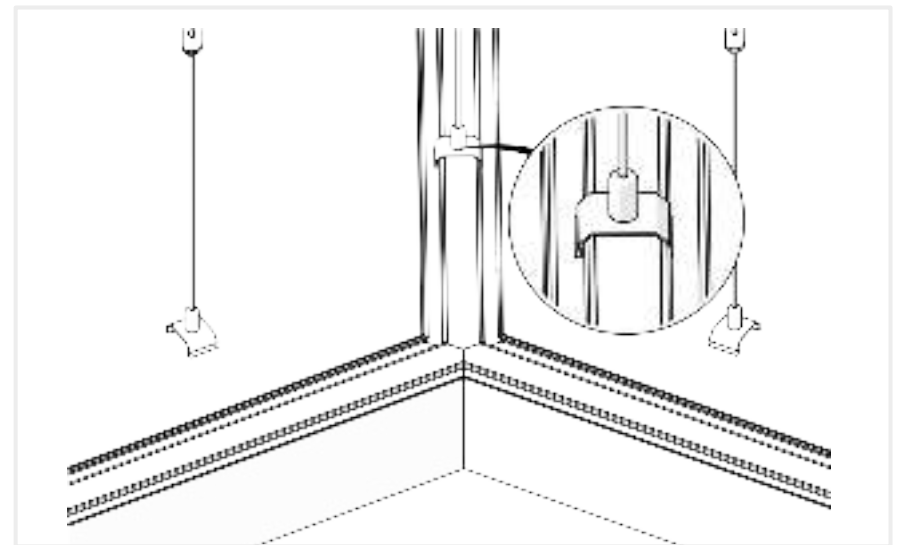

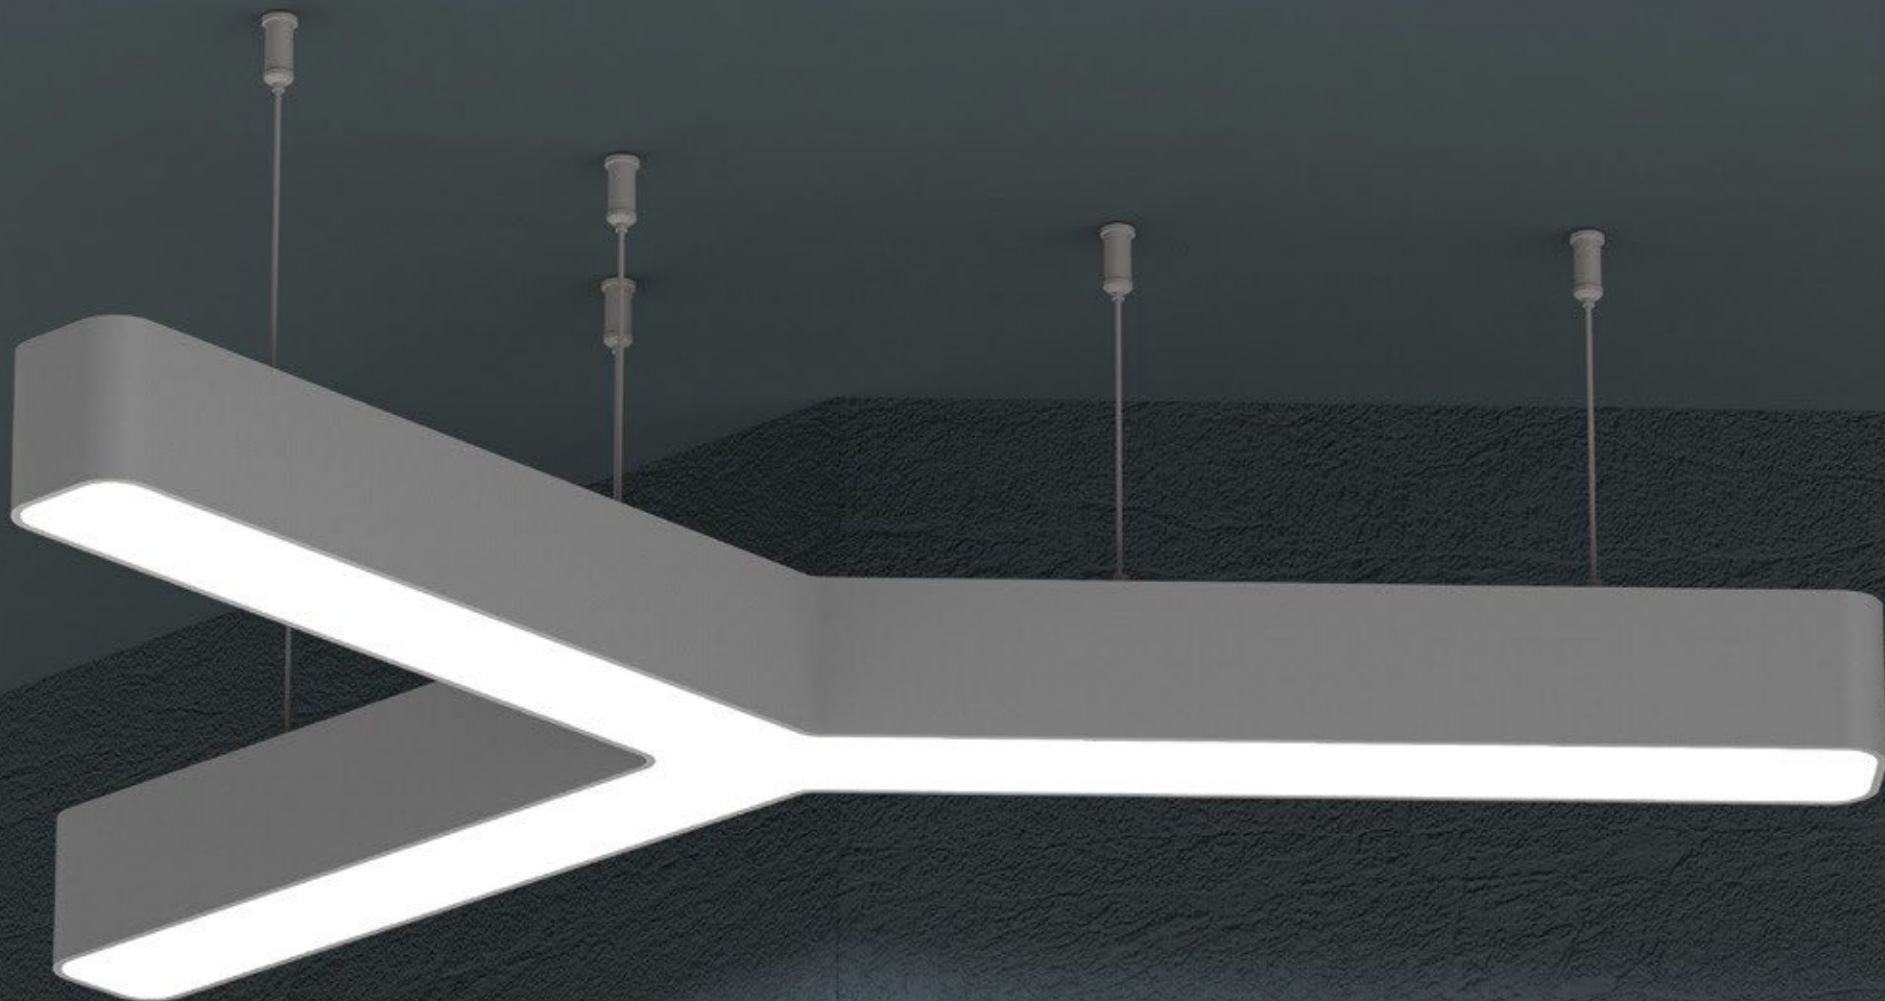


LEPUS





Technical Specifications

- Luminaire Specs:** Power: 10/15/20/25/30/35/40 W/m
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended
- LED Module:** LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient
- Power Supply:** Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9
- Housing:** Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating



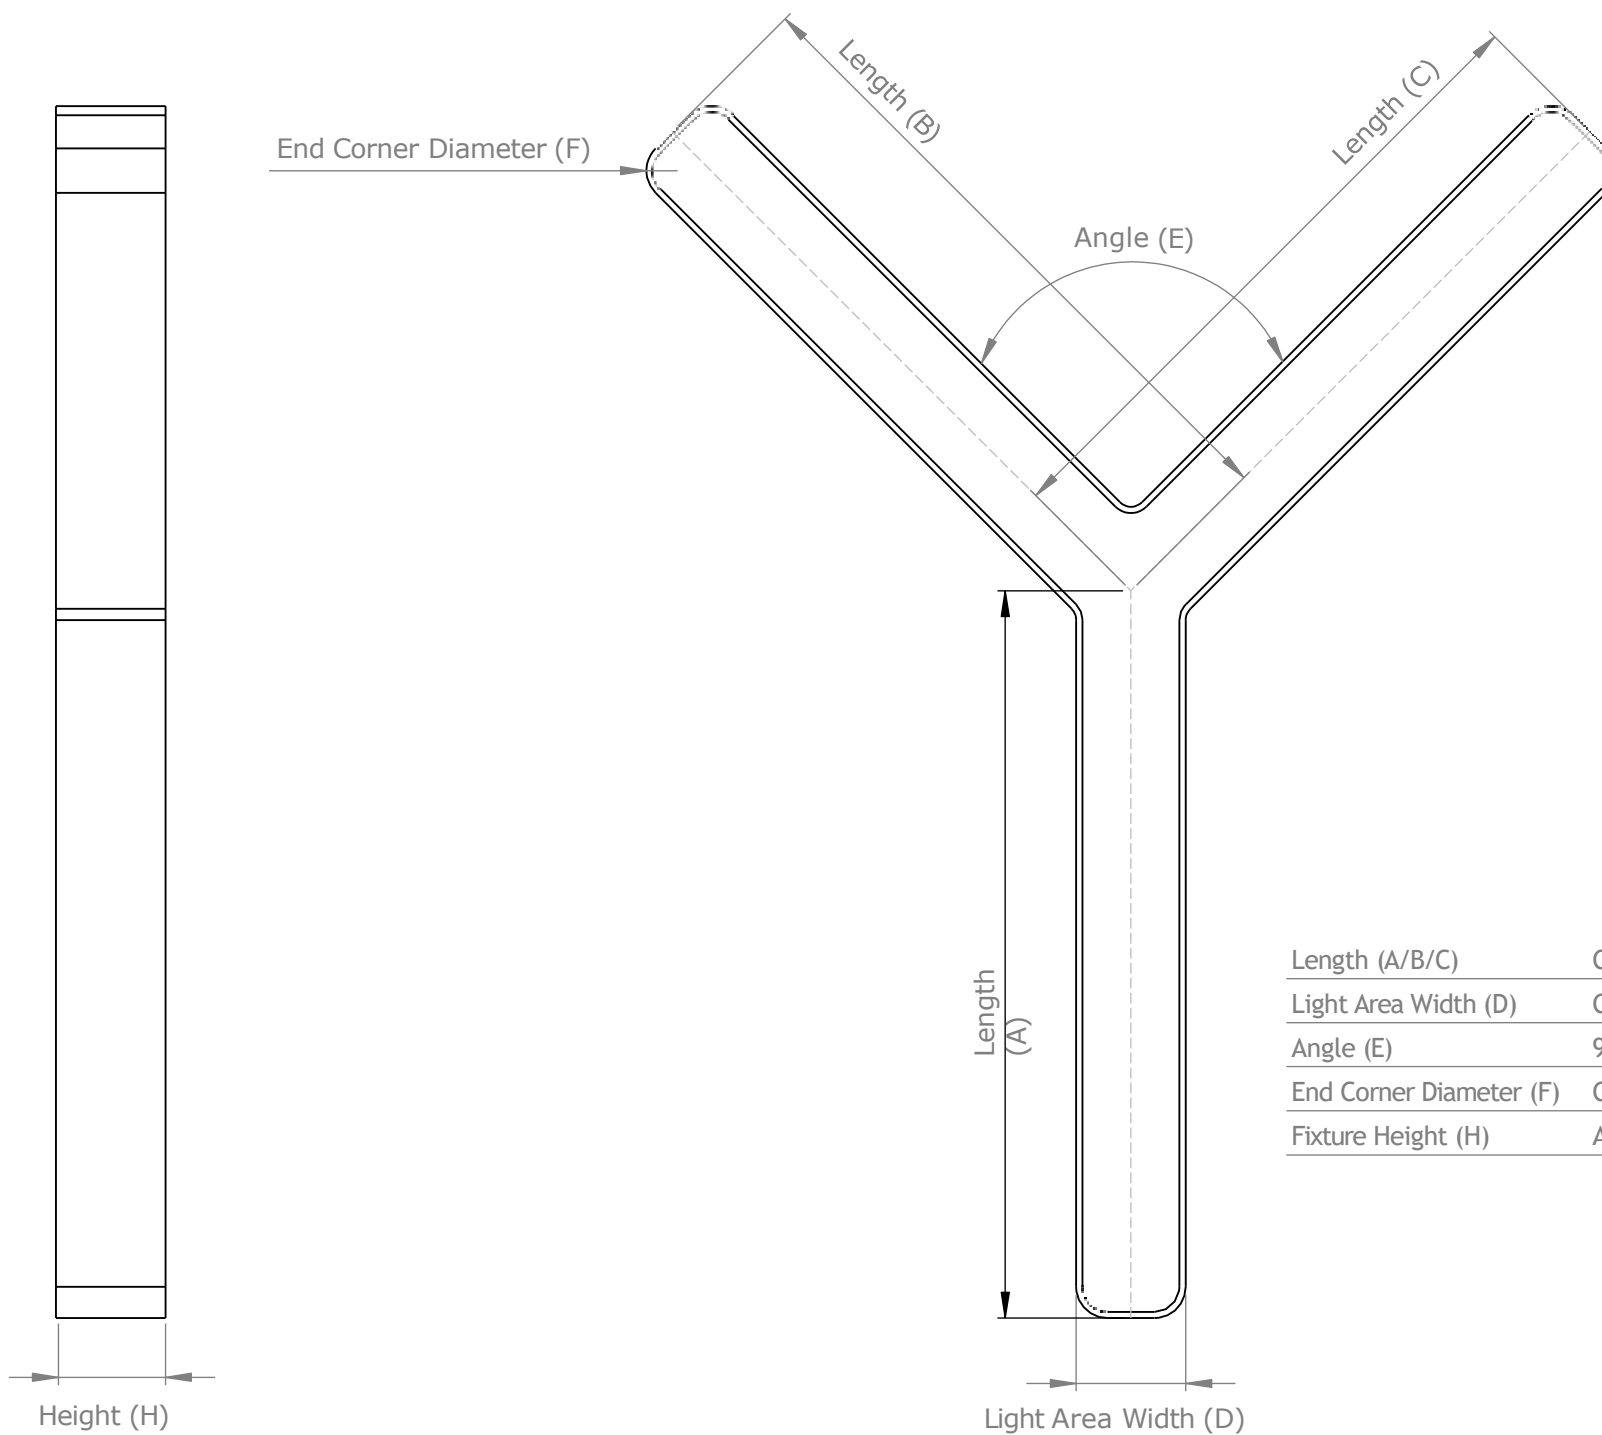

Length (A/B/C)	Customized (Min. 300mm / Max. 800mm)
Light Area Width (D)	Customized (Min. 80mm / Max. 250mm)
Angle (E)	90° / 120°
End Corner Diameter (F)	Customized (Min. 20mm / Max. 80mm)
Fixture Height (H)	A: 50mm / B: 70mm / C: 100mm

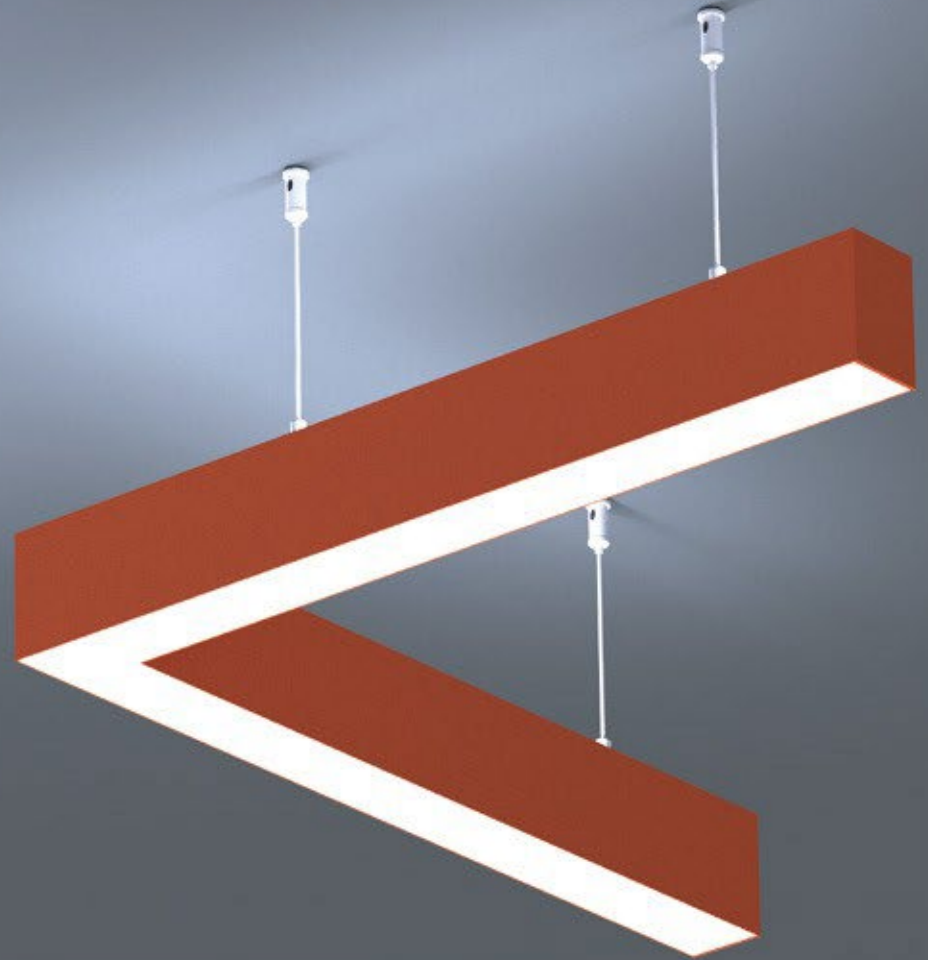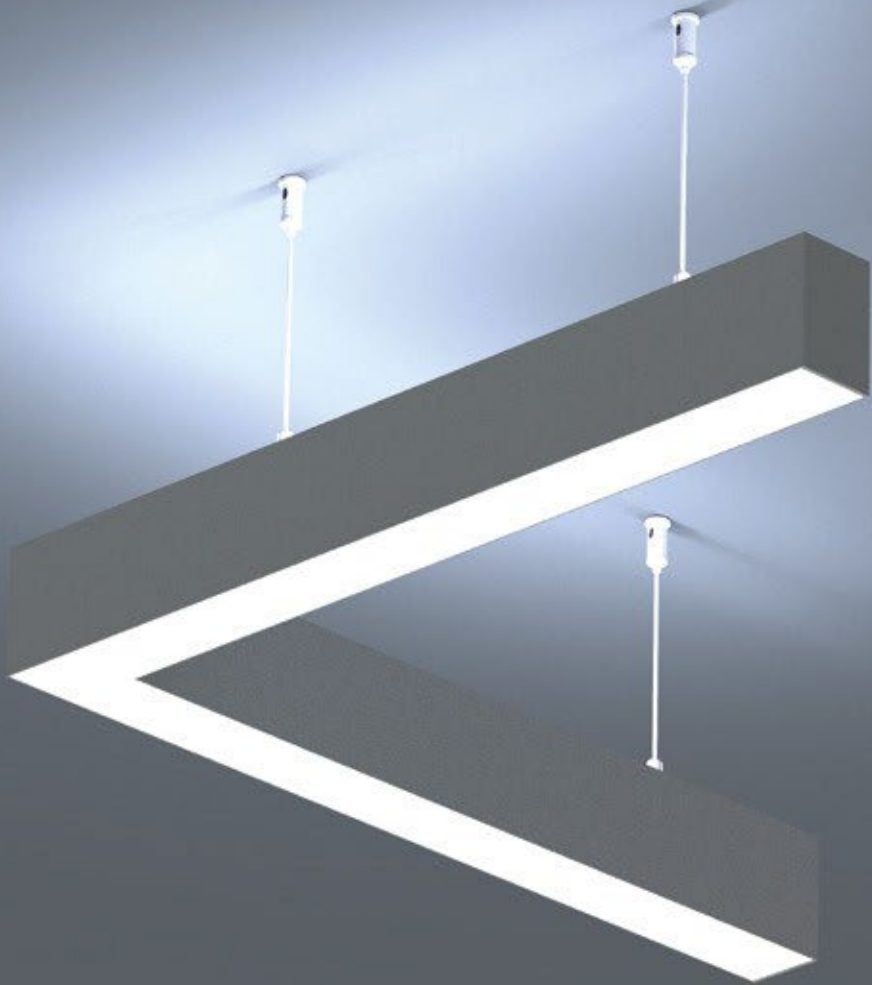

CETUS





Technical Specifications

Luminaire Specs:	Power: 10/15/20/25/30/35/40 W/m
	Efficiency: >110lm/W / CRI >80 / IP40
	Beam Angle: 120 Degree / Safety: Class I
	Input Voltage: 220-230Vac / 50-60Hz
	Ambient Temp. (Ta): -5°C — +45°C
	Installation: Surface / Suspended
LED Module:	LED Chip: Osram / Seoul / Lumileds
	3-Step MacAdams - LM80
	>60000 Hours Life Span
	2700K / 3000K / 4000K / 5000K / 6500K
	Metal Core PCB - White Finish
	High Heat Transfer Coefficient
Power Supply:	Brand: Tridonic / Philips / Osram / Eaglerise
	Constant Current / ENEC Certified
	>50000 Hours Life Span / PF>0,9
Housing:	Aluminium Extrusion Profile
	UV Protected Opal Diffuser
	Finish: Electrostatic Powder Coating






Technical Drawing

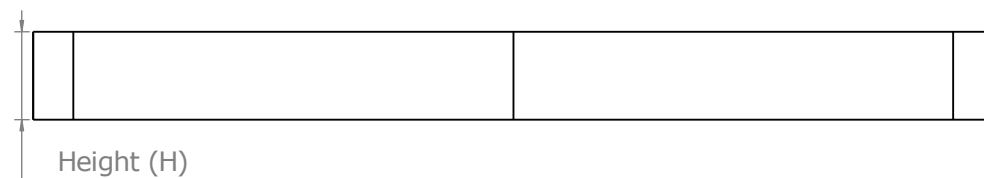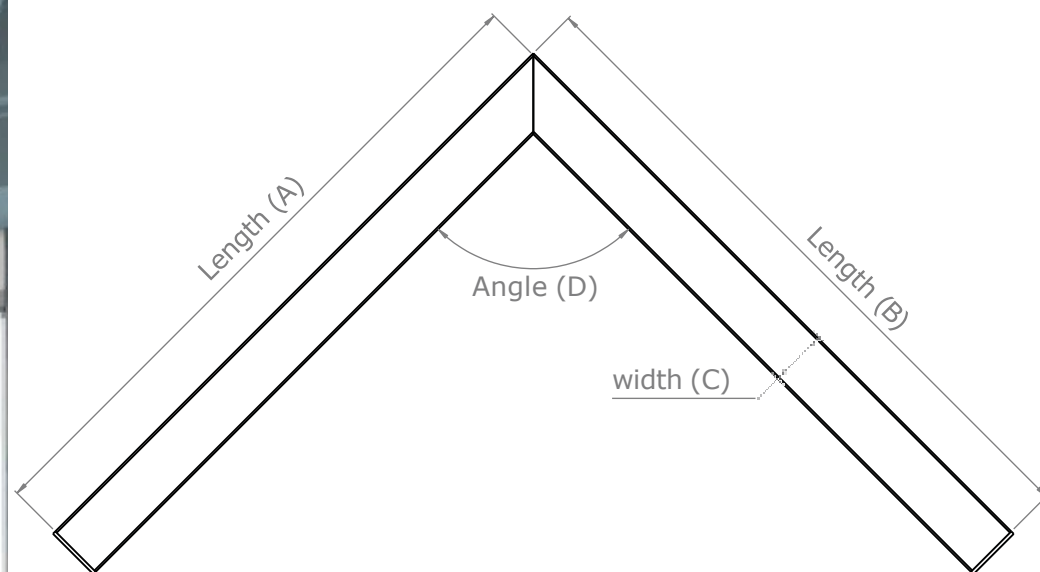

Length (A/B)	Customized (Min. 300mm / Max. 5000mm)
Width (C)	50,8mm
Angle (D)	60° / 90° / 120°
Fixture Height (H)	78mm

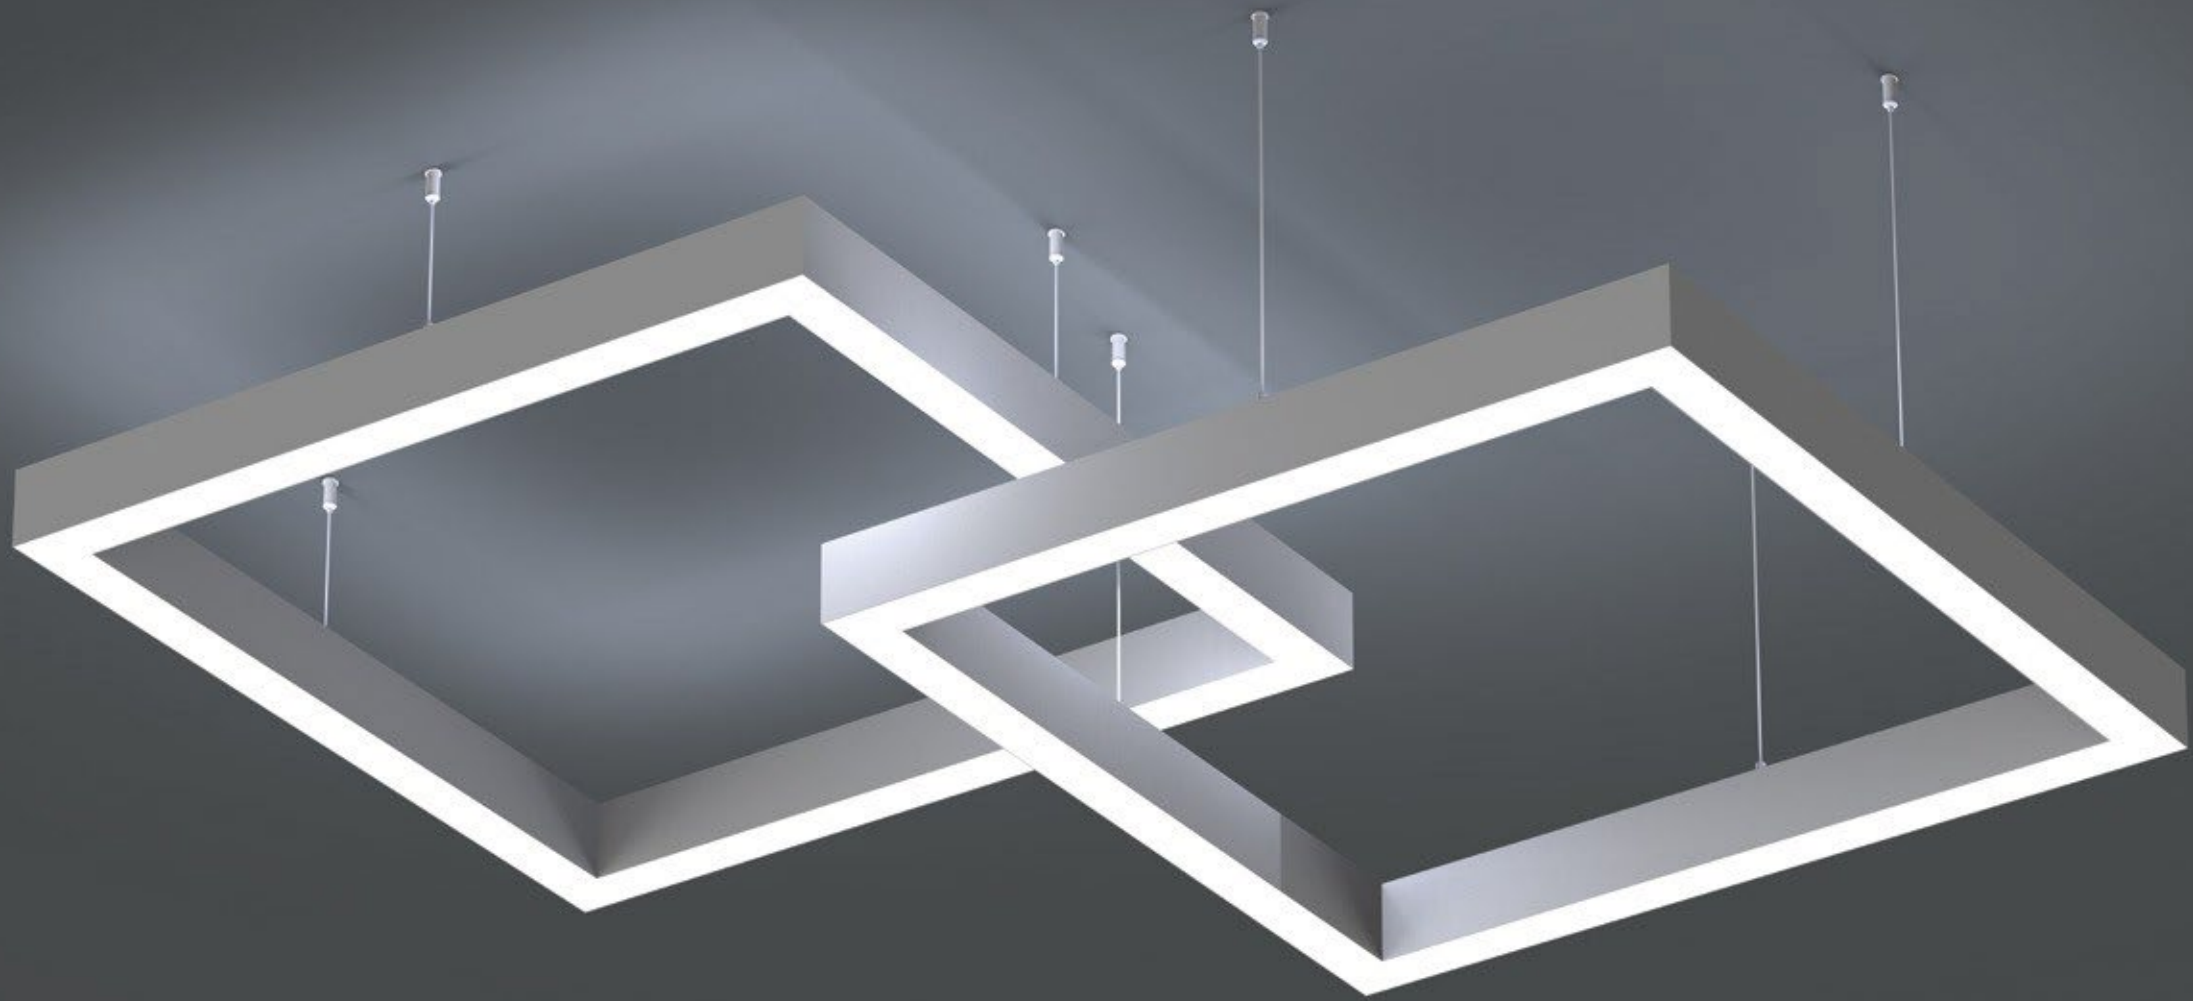

LEO




Technical Specifications


- Luminaire Specs:** Power: 10/15/20/25/30/35/40 W/m
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended
- LED Module:** LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient
- Power Supply:** Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9
- Housing:** Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating



Length (A)	Customized (Min. 300mm / Max. ∞)
Width (B)	Customized (Min. 300mm / Max. ∞)
Light Area Width (C)	50,8mm
Fixture Height (H)	78mm

Technical Drawing

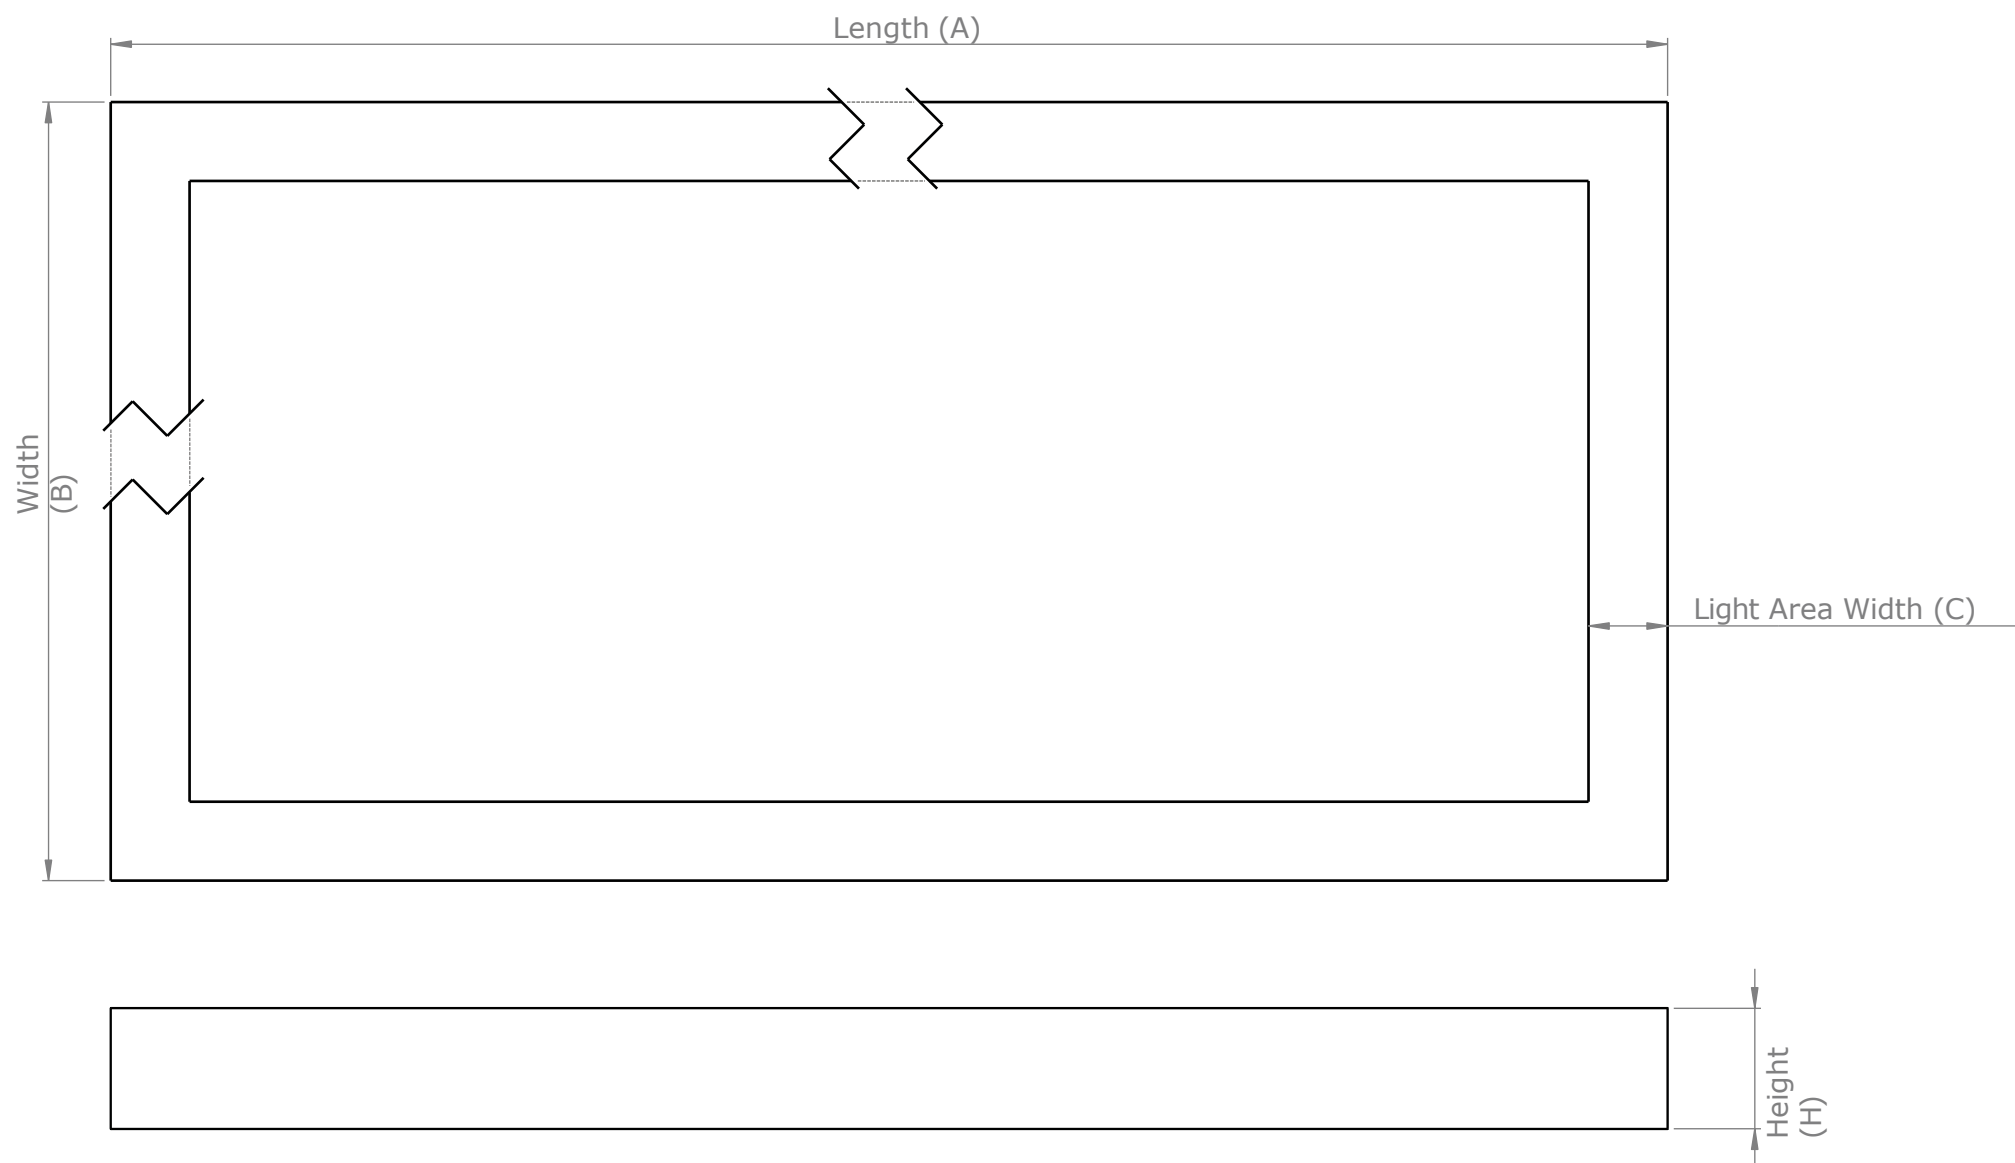

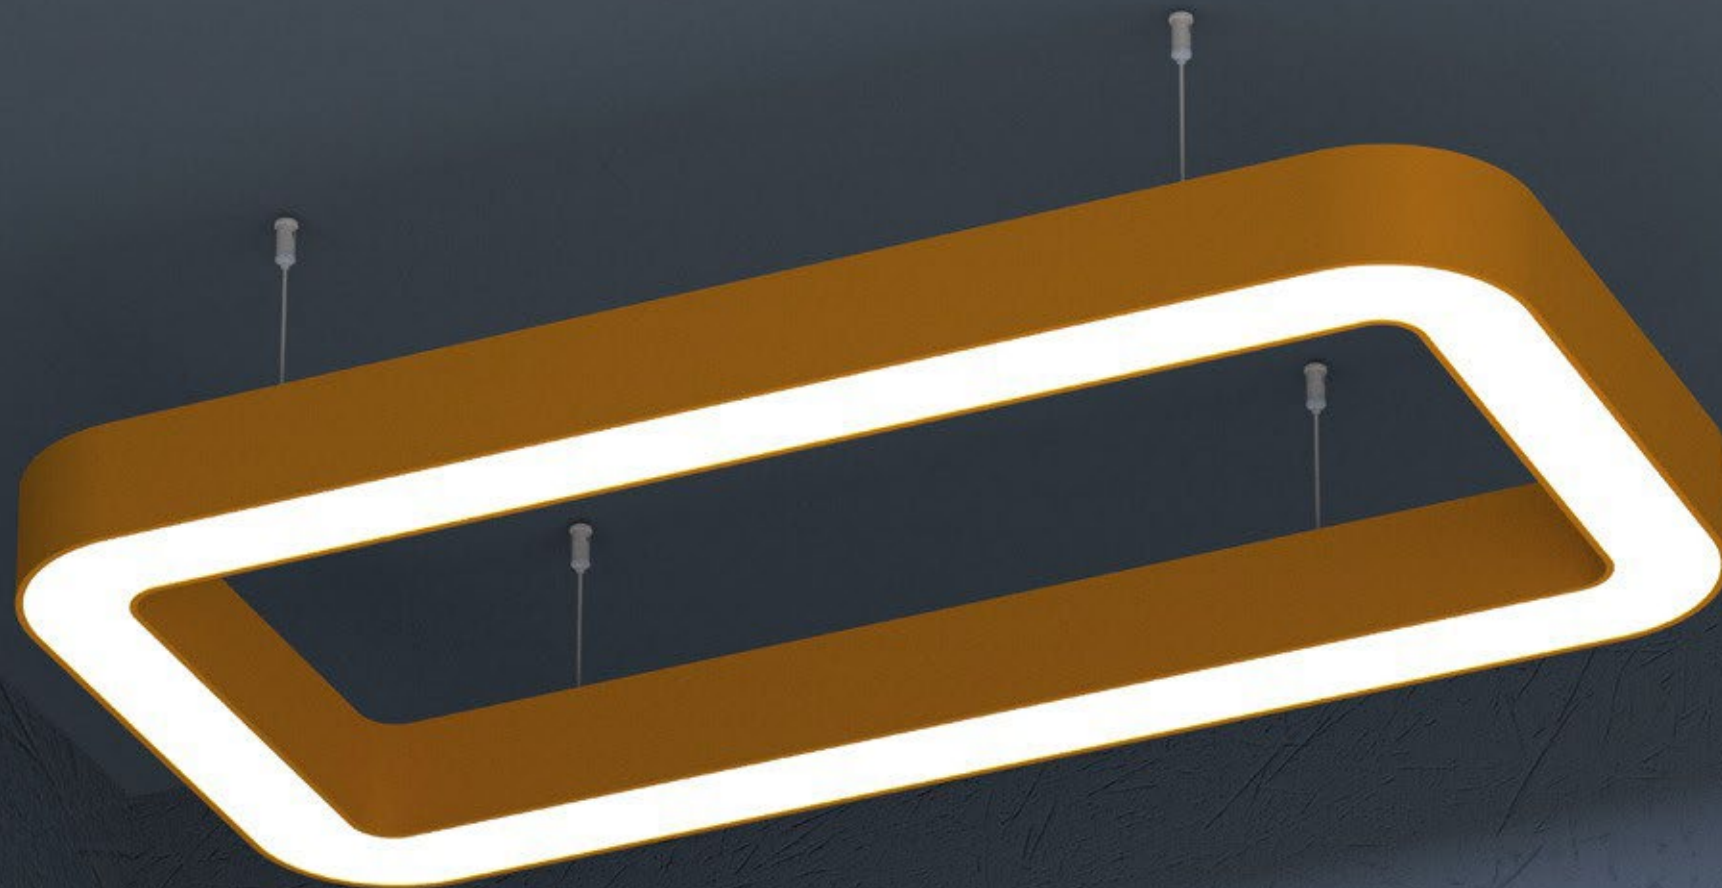

TAURUS

Some people
dream of success, others
make it
happen.™




Technical Specifications

- Luminaire Specs:** Power: 10/15/20/25/30/35/40 W/m
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended
- LED Module:** LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient
- Power Supply:** Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9
- Housing:** Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating



Length (A)	Customized (Min. 300mm / Max. ∞)
Width (B)	Customized (Min. 300mm / Max. ∞)
Light Area Width (C)	Customized (Min. 50mm / Max. 300mm)
Corner Diameter (D)	Customized (Min. 50mm / Max. 600mm)
Fixture Height (H)	A: 50mm / B: 70mm / C: 100mm


Technical Drawing

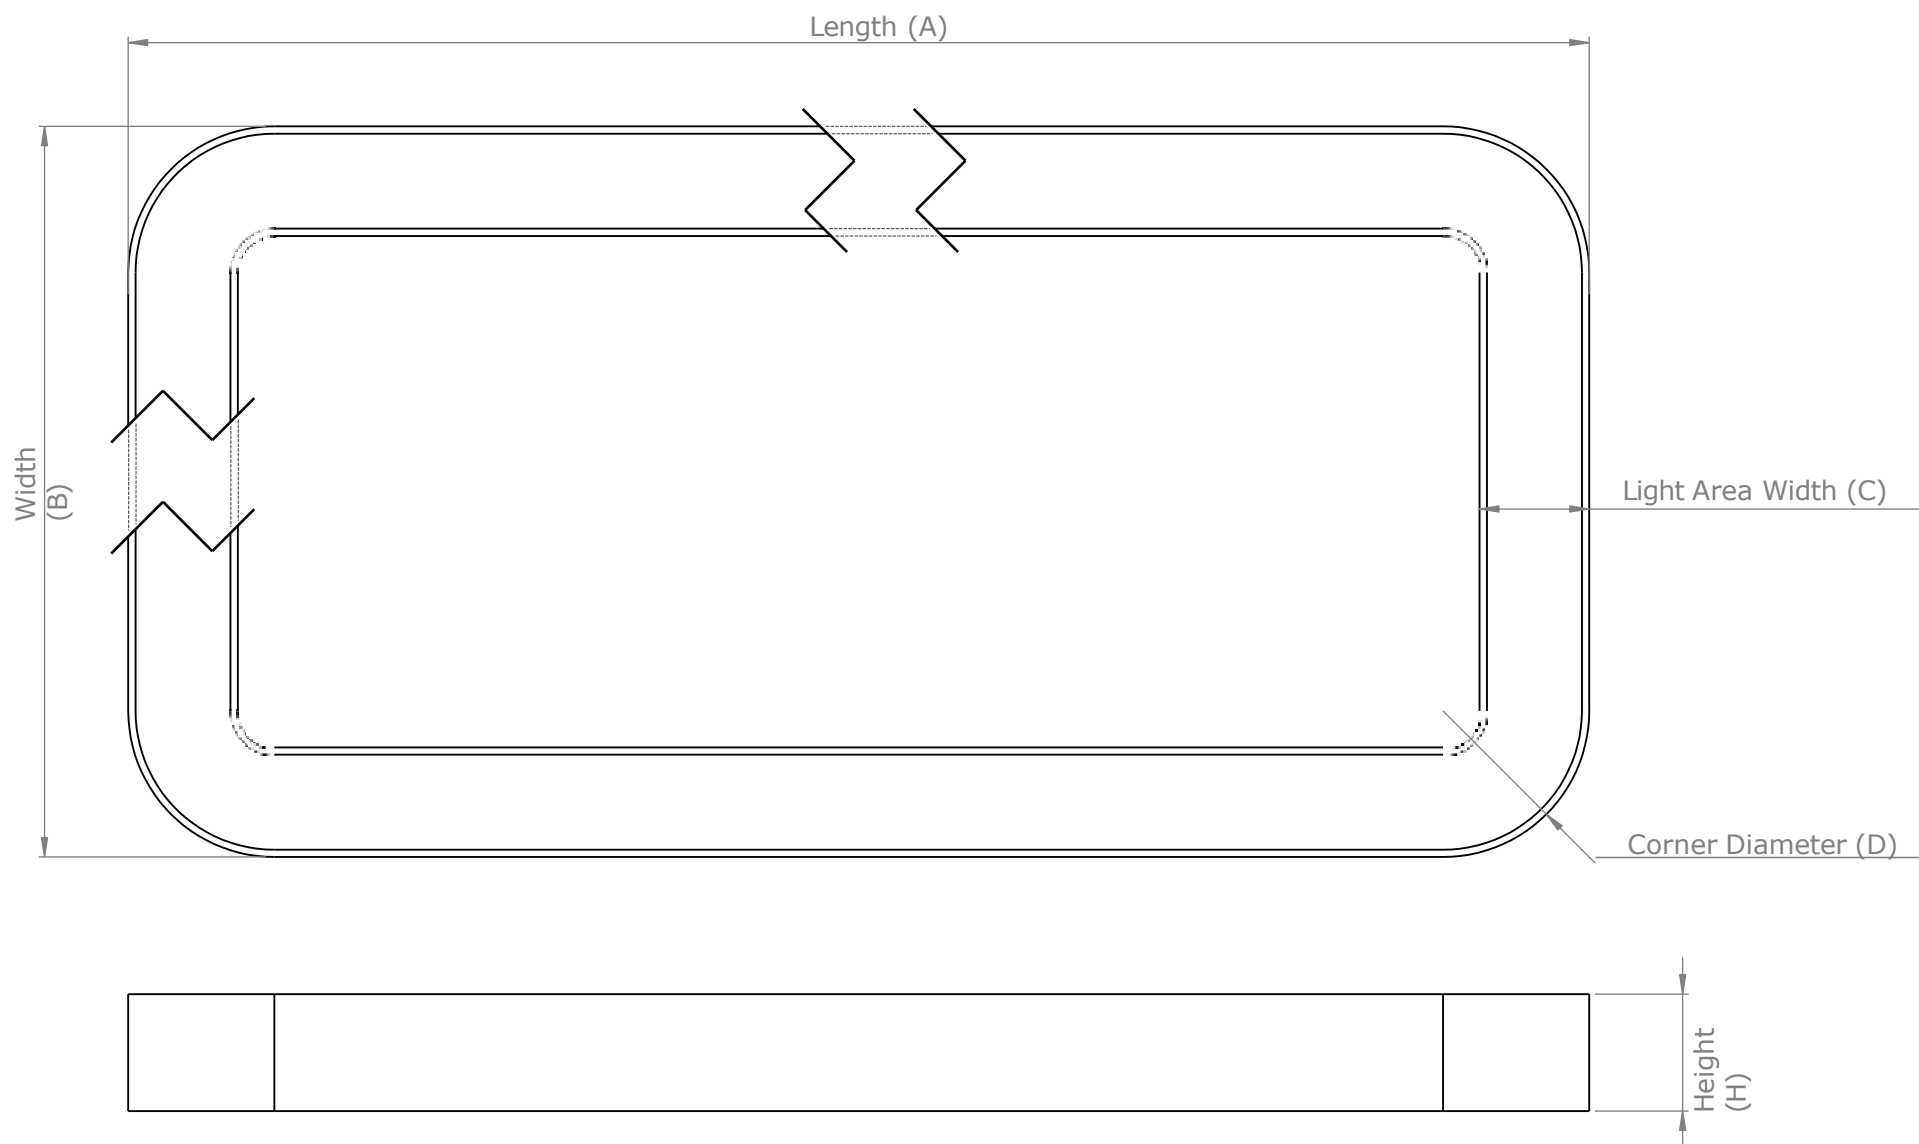



FEEL THE BURN

SPORTS

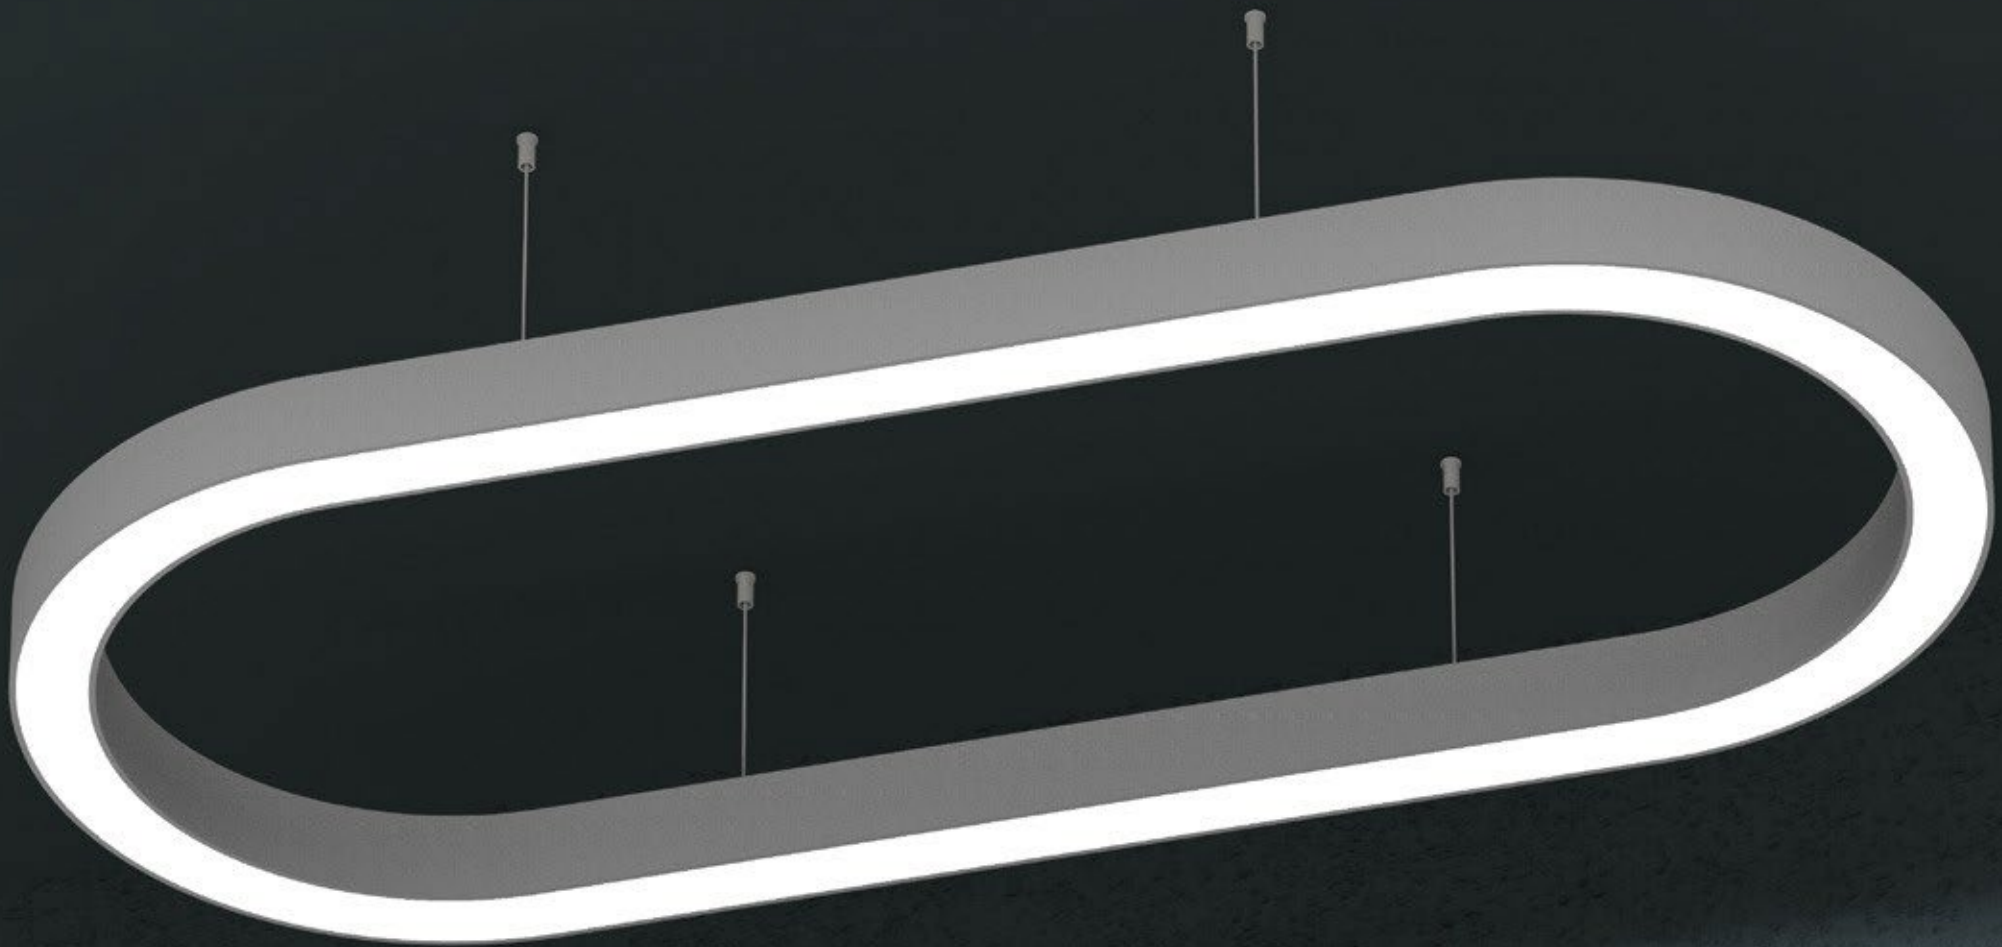

CARINA



Technical Specifications

Luminaire Specs: Power: 10/15/20/25/30/35/40 W/m
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended


LED Module: LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient


Power Supply: Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9

Housing: Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating



Length (A)	Customized (Min. 300mm / Max. ∞)
End Diameter (B)	Customized (Min. 200mm / Max. 1800)
Light Area Width (C)	Customized (Min. 50mm / Max. 300mm)
Fixture Height (H)	A: 50mm / B: 70mm / C: 100mm

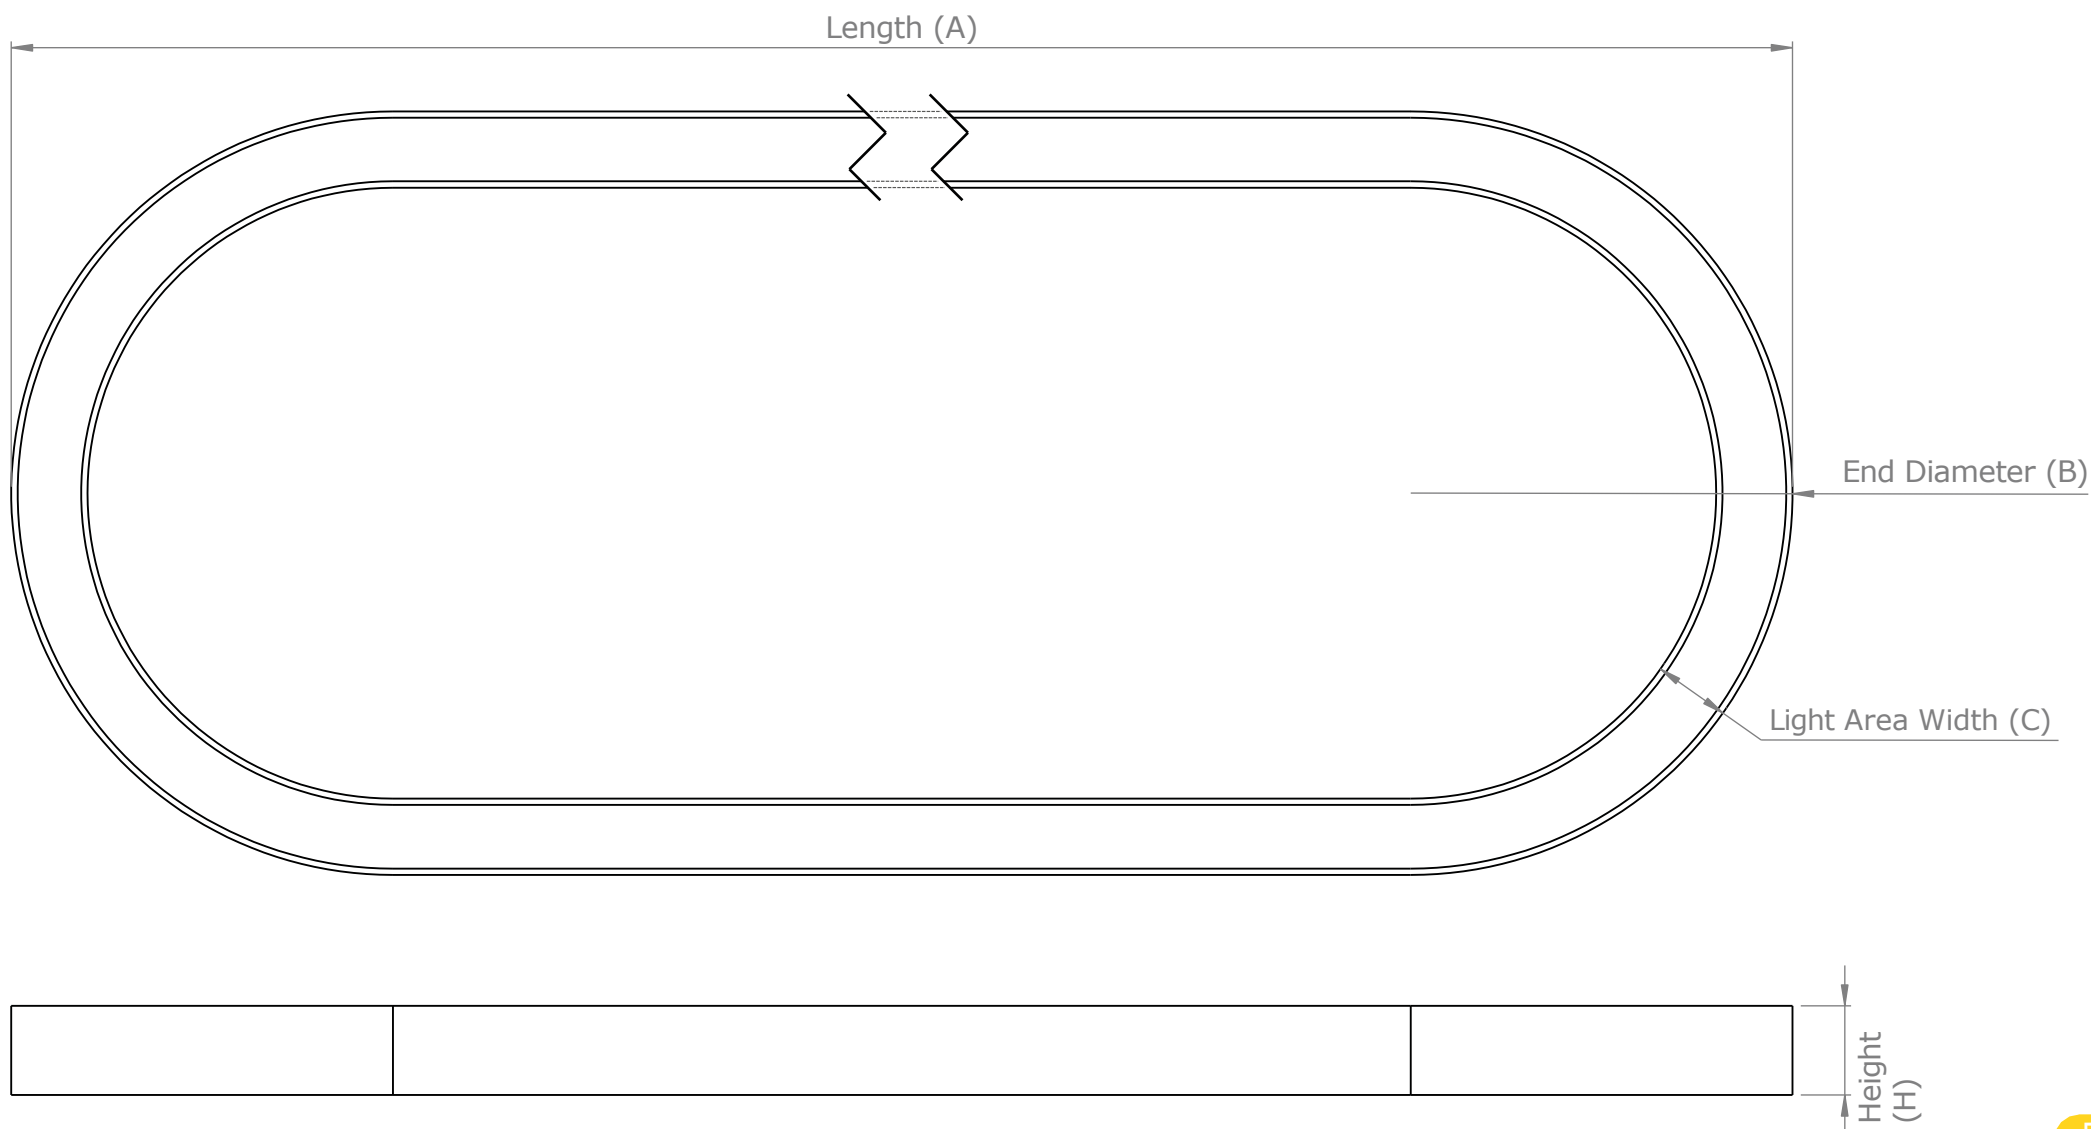

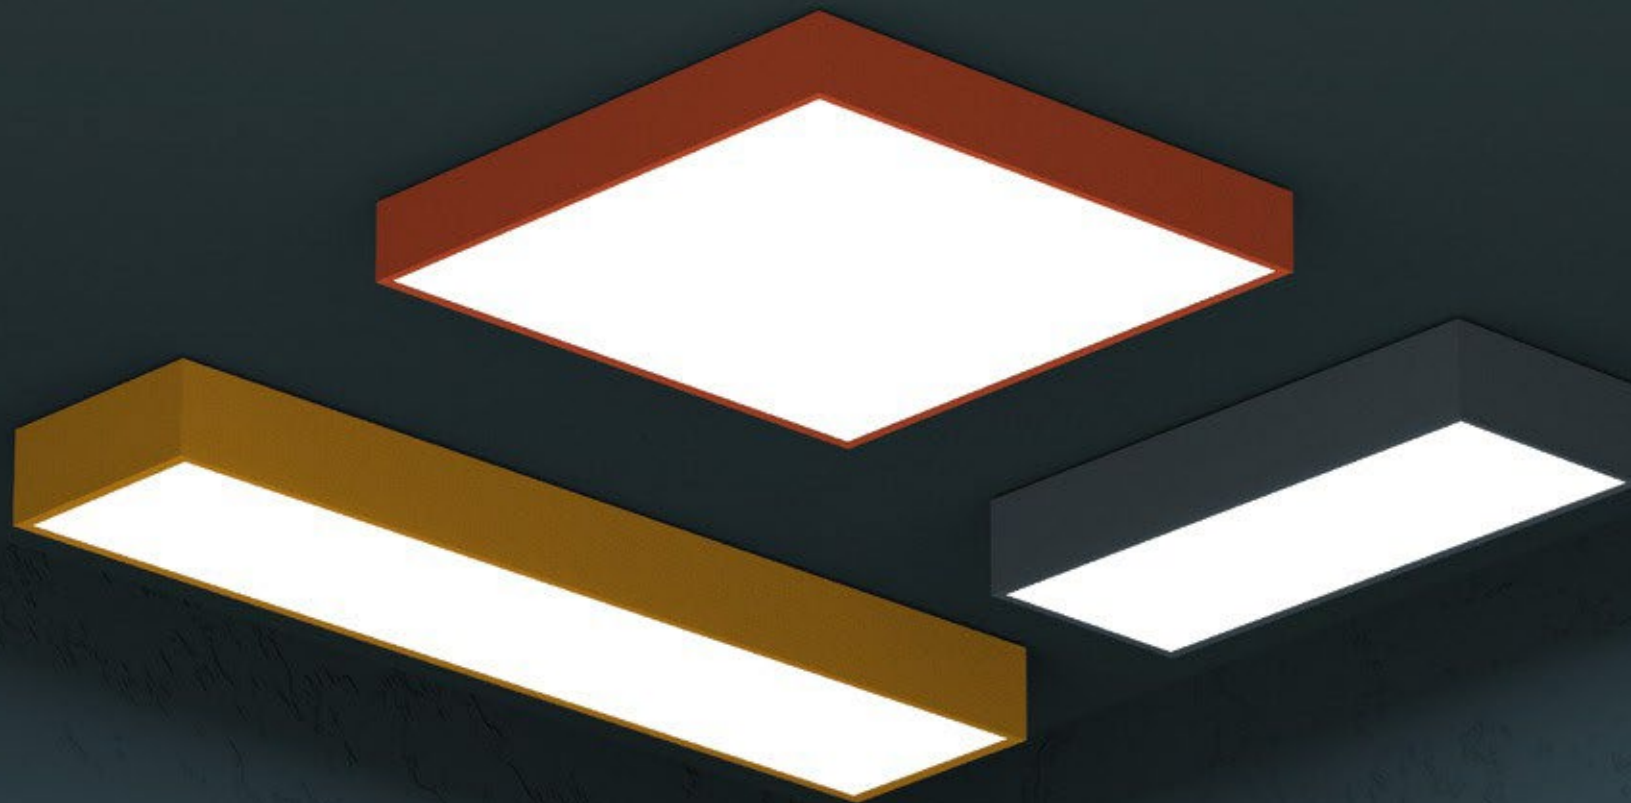

CYGNUS



Technical Specifications

Luminaire Specs: Power: (Length(m)+Width(m))x(20/30/40/50/60)
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended

LED Module: LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient


Power Supply: Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9

Housing: Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating





Technical Drawing

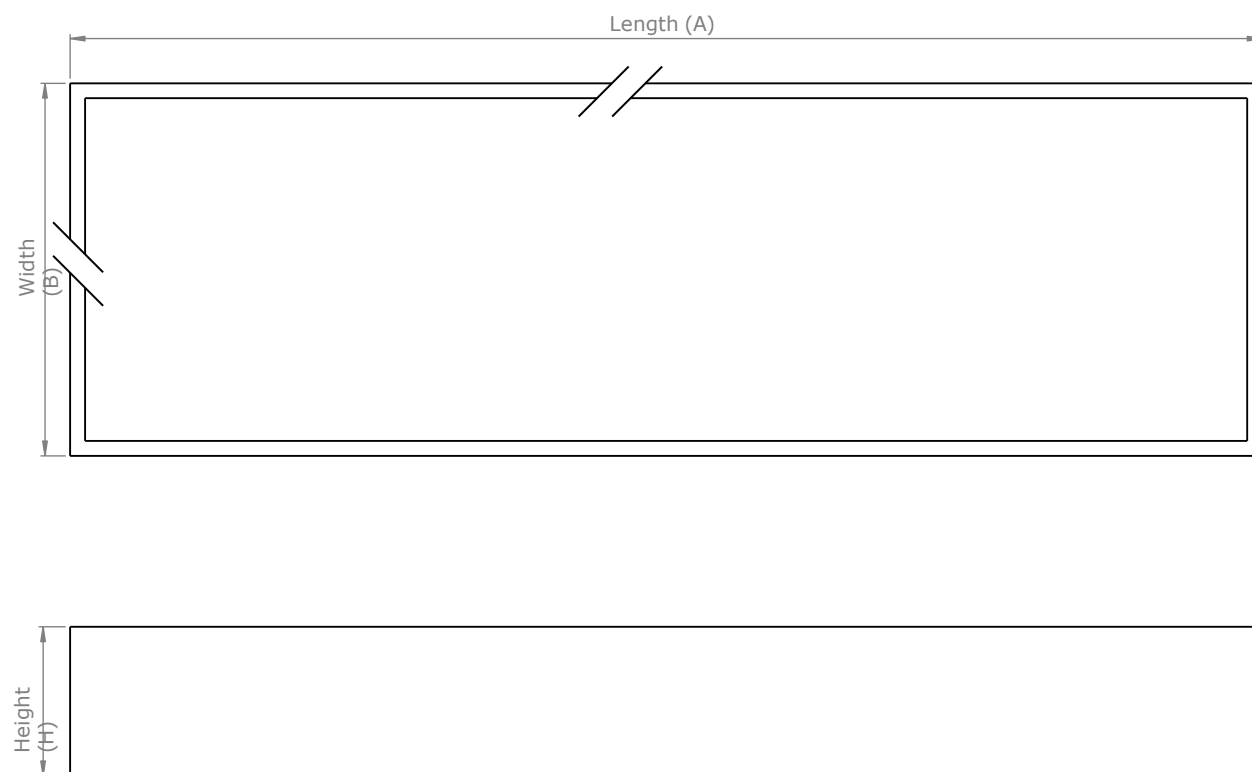


Length (A)	Customized (Min. 300mm / Max. 1800mm)
Width (B)	Customized (Min. 300mm / Max. 1200mm)
Fixture Height (H)	A: 50mm / B: 70mm / C: 100mm





BE BRAVE.
BE SURE **BE YOUR OWN** HERO
FEARLESS.
BE DEFIANT.
BE FEARLESS.



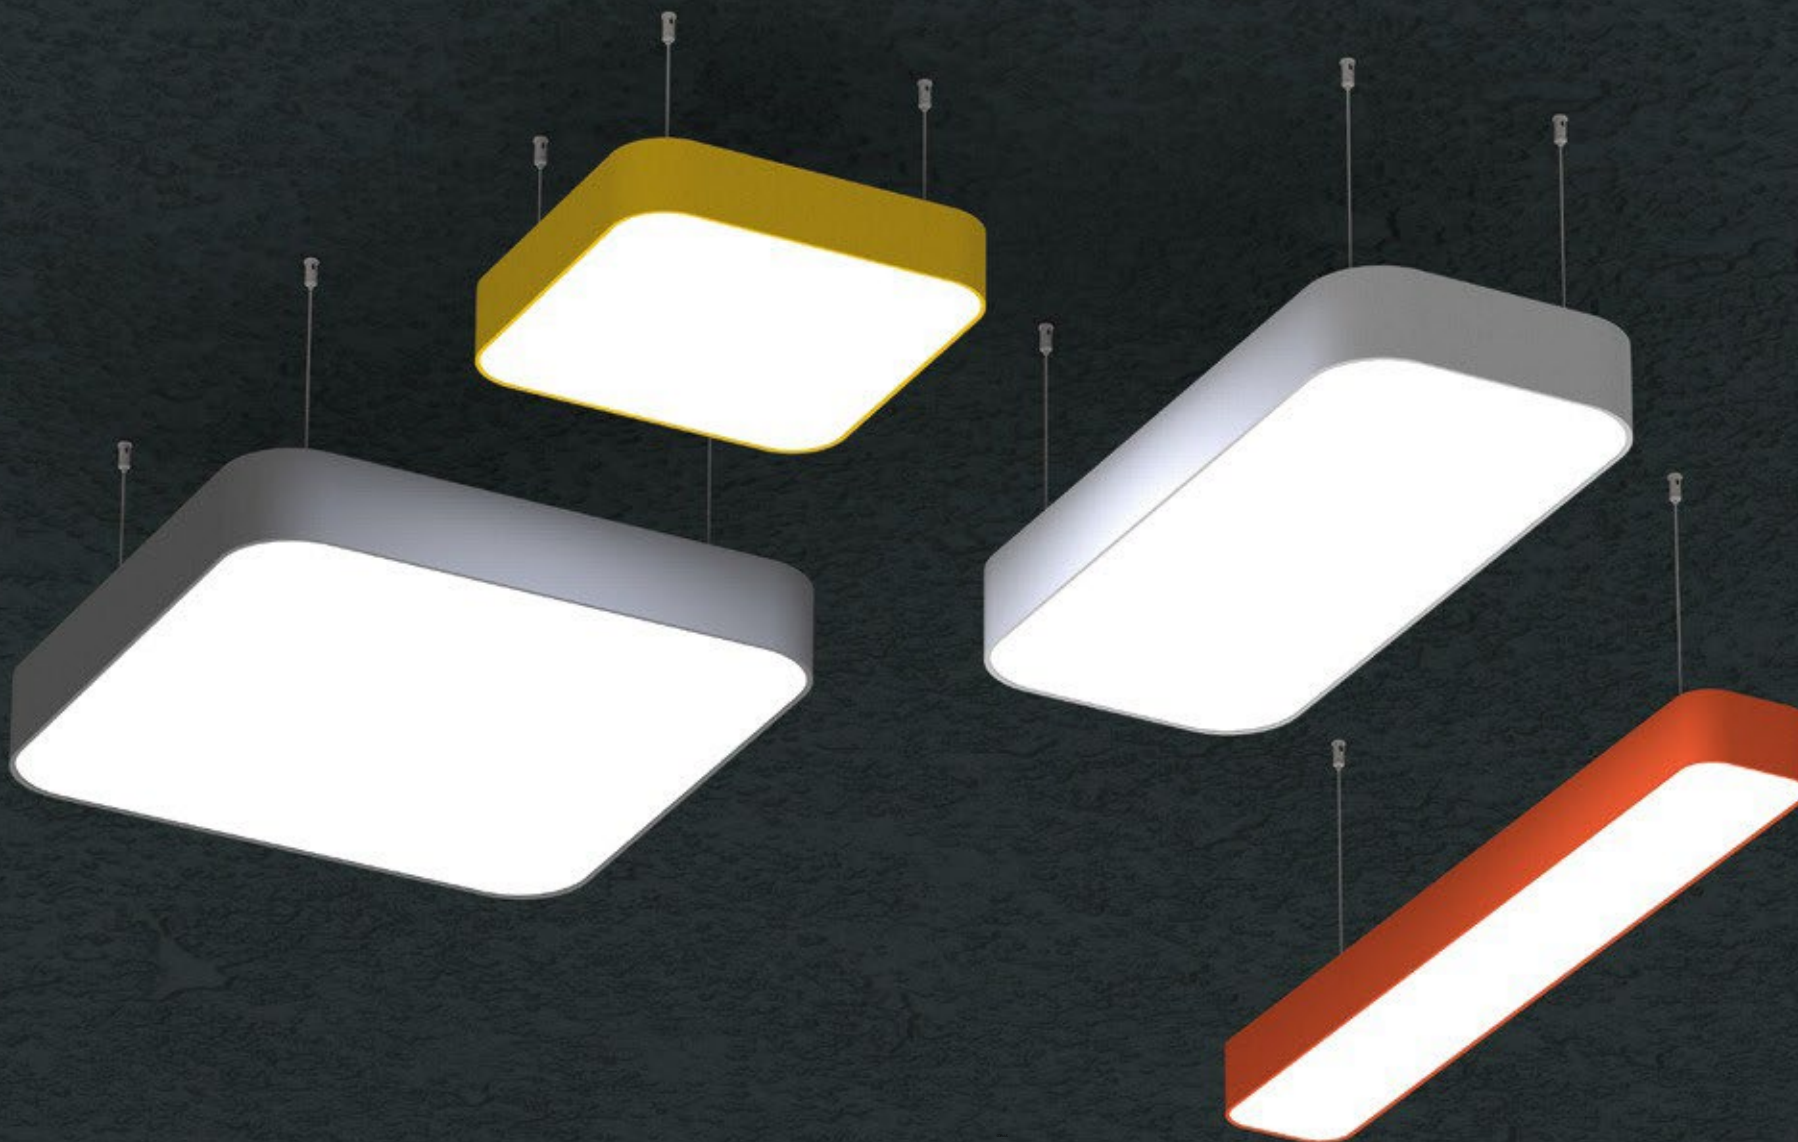

CORVUS




Technical Specifications

Luminaire Specs: Power: (Length(m)+Width(m))x(20/30/40/50/60)
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended

LED Module: LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient

Power Supply: Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9


Housing: Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating

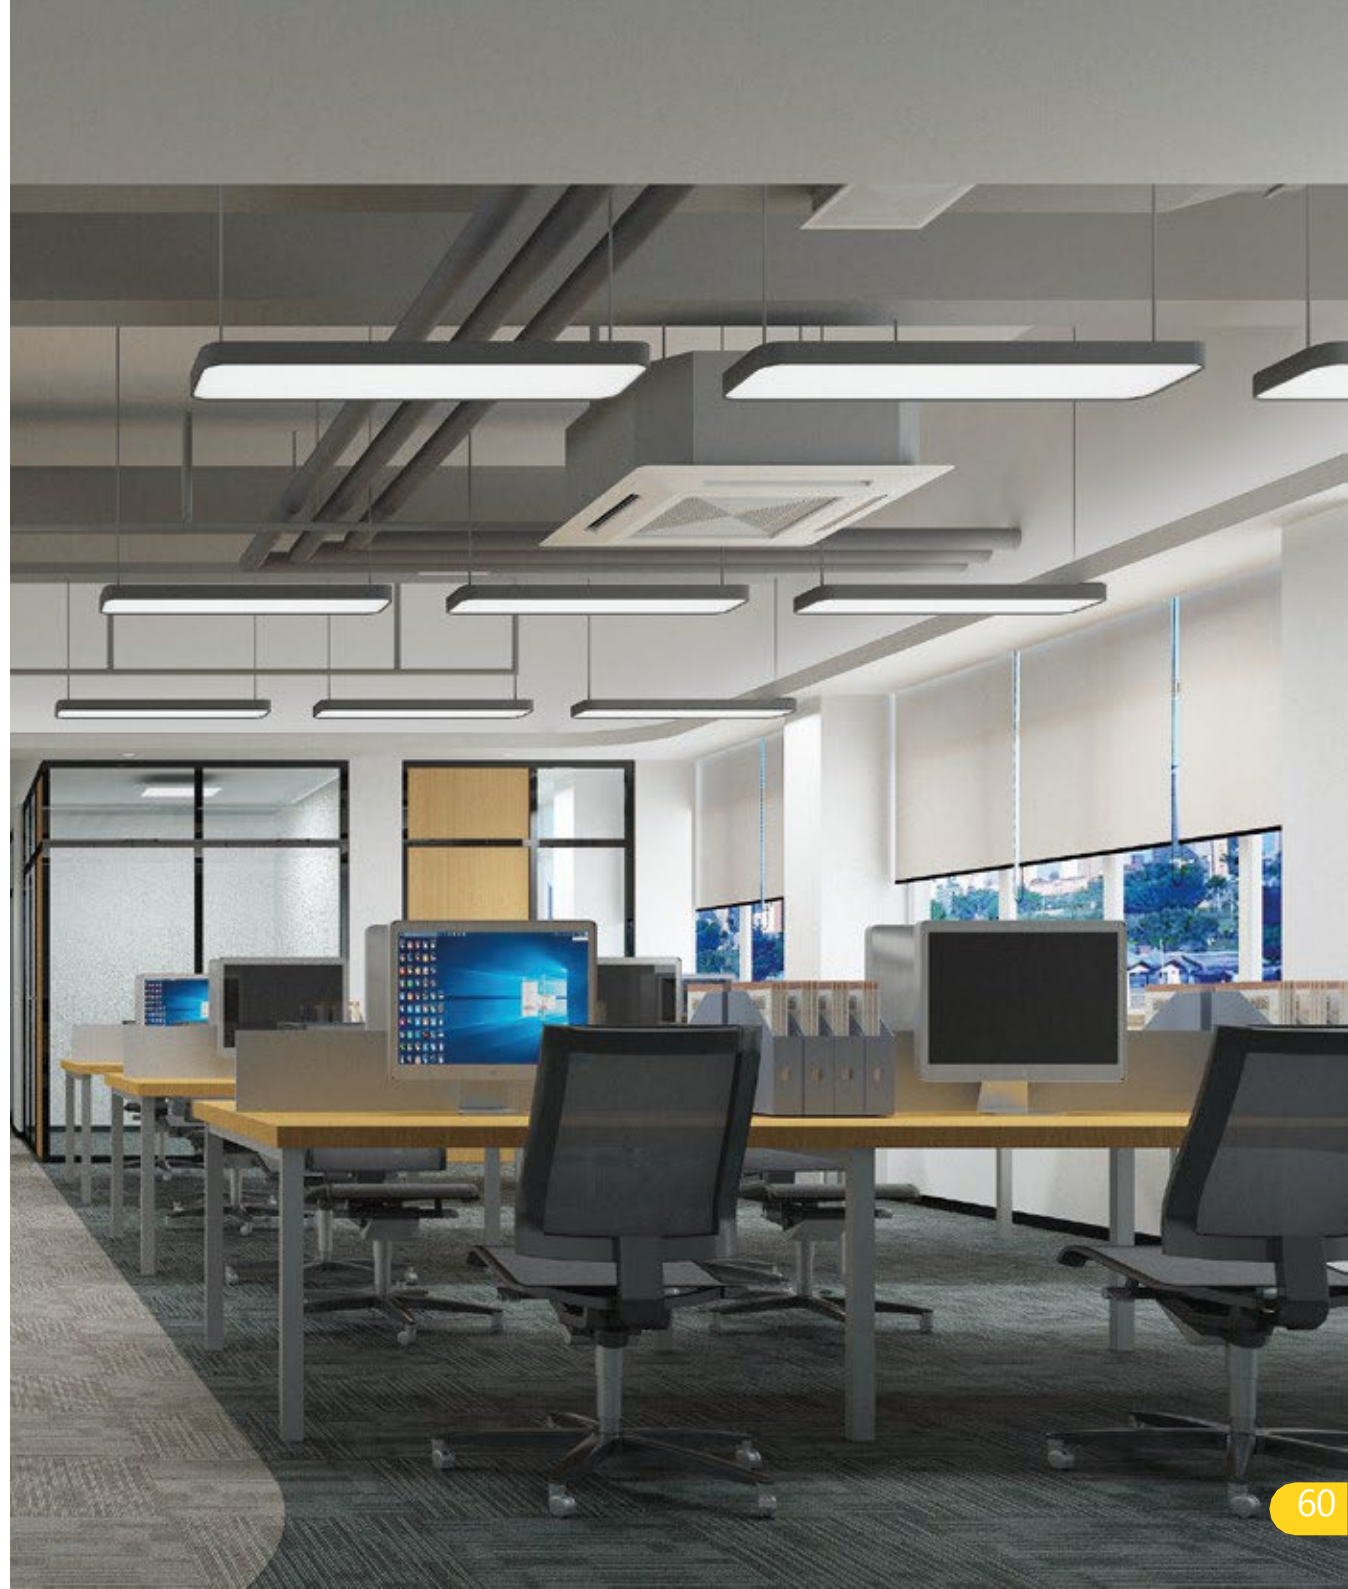

Length (A)	Customized (Min. 300mm / Max. 1800mm)
Width (B)	Customized (Min. 300mm / Max. 1200mm)
Corner Diameter (C)	Customized (Min. 100mm / Max. 500mm)
Fixture Height (H)	A: 50mm / B: 70mm / C: 100mm





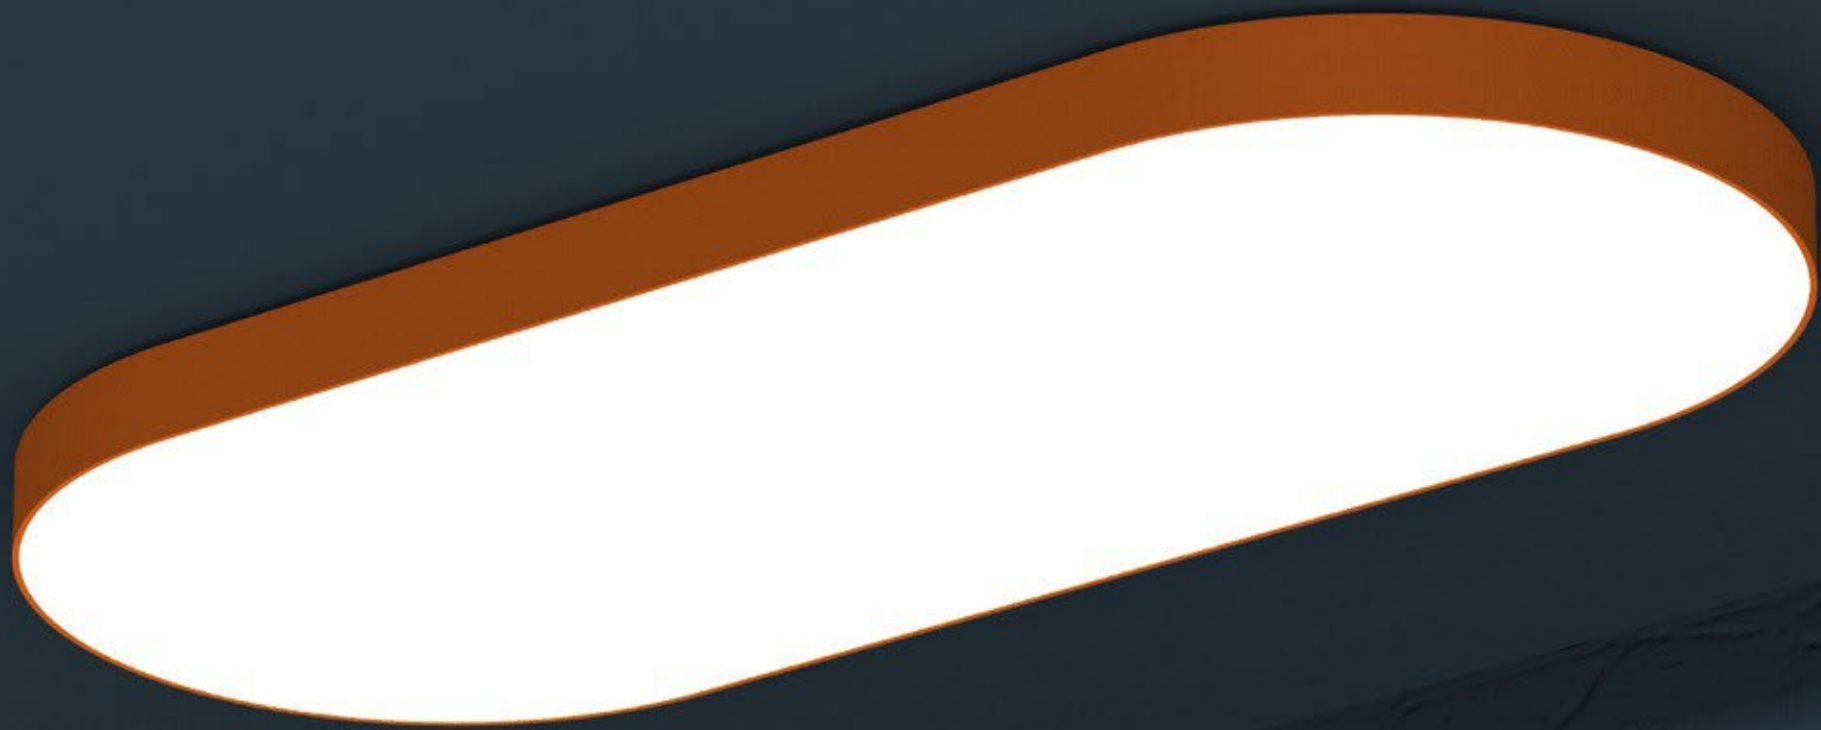

GRUS




Luminaire Specs: Power: (Length(m)+Width(m))x(20/30/40/50/60)
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended

LED Module: LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient

Power Supply: Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9

Housing: Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating

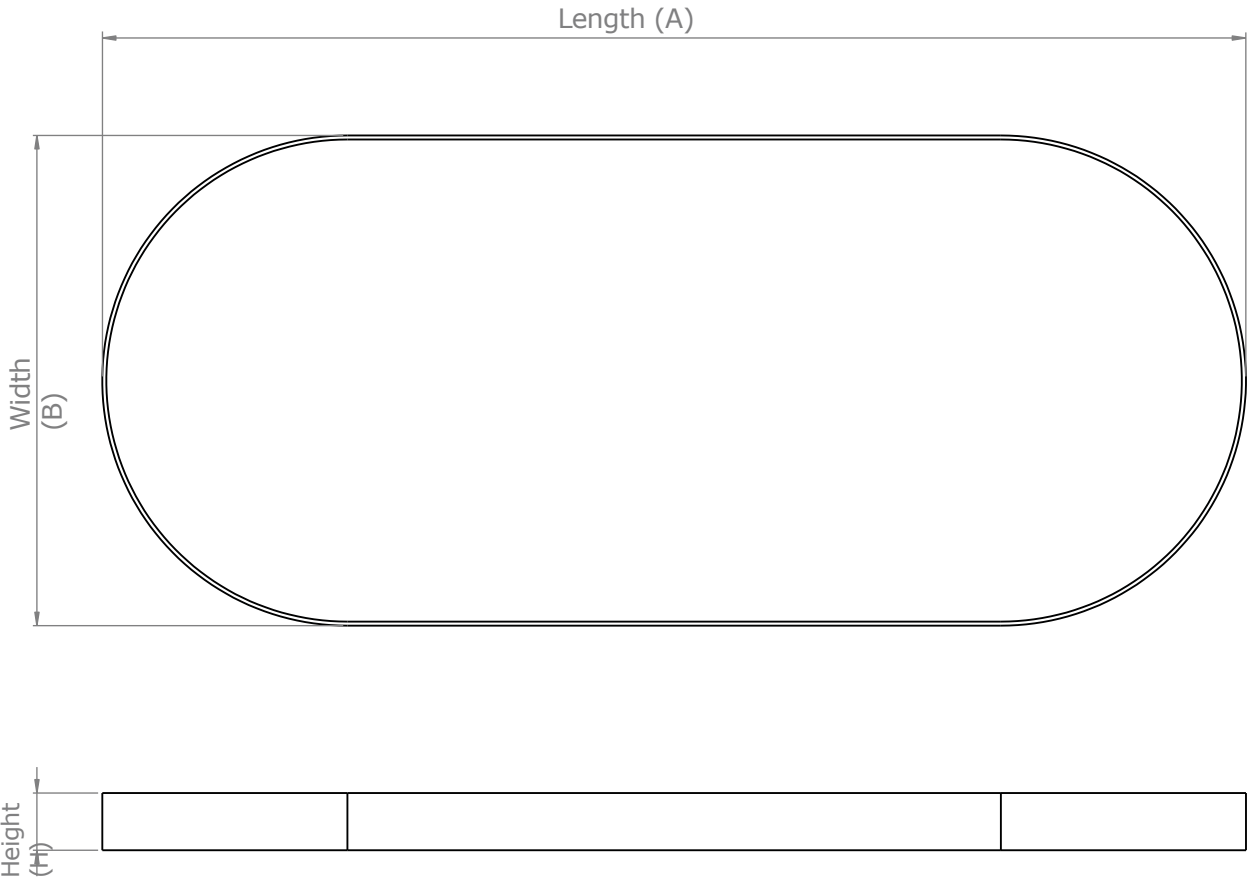

Length (A)	Customized (Min. 300mm / Max. 1800mm)
Width (B)	Customized (Min. 300mm / Max. 1200mm)
Fixture Height (H)	A: 50mm / B: 70mm / C: 100mm



LYNX



Technical Specifications

Luminaire Specs: Power: 10/15/20/25/30/35/40 W/m
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended

LED Module: LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient


Power Supply: Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9

Housing: Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating






Technical Drawing

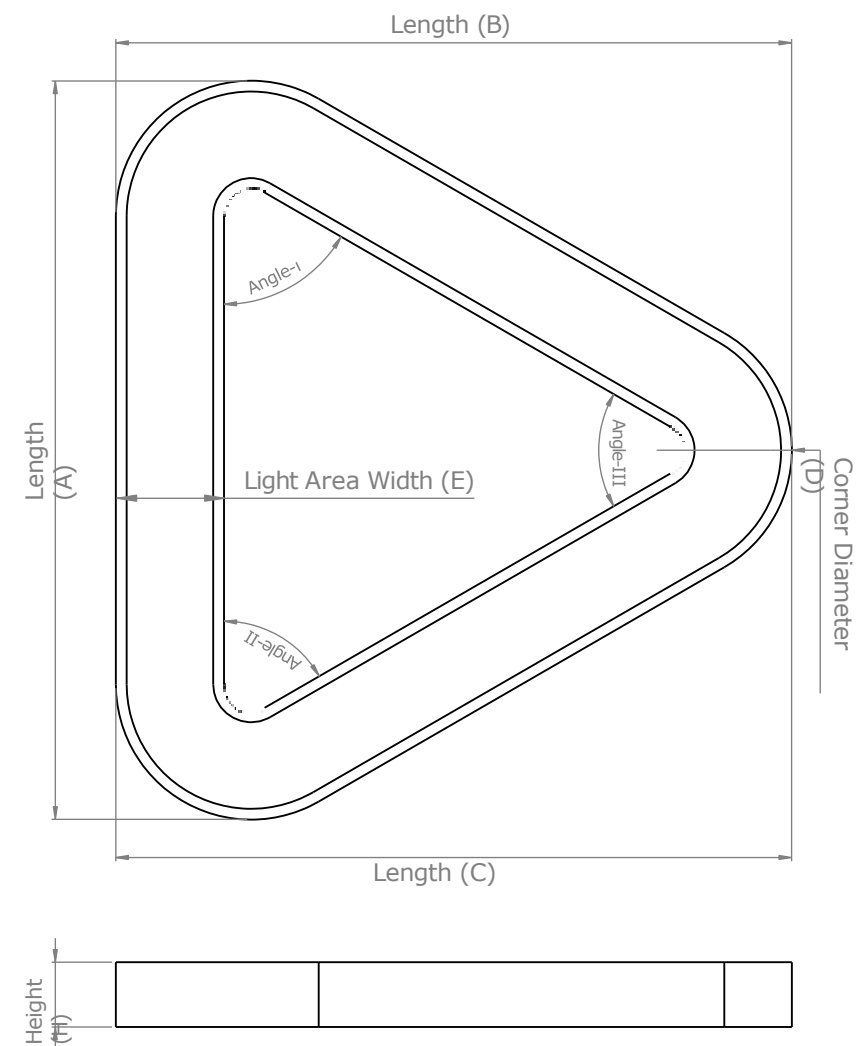

Length (A/B/C)	Customized (Min. 300mm / Max. 1200mm)
Angle (I/II/III)	Customized (30° / 45° / 60° / 75° / 90°)
Corner Diameter (D)	Customized (Min. 50mm / Max. 200mm)
Light Area Width (E)	Customized (Min. 50mm / Max. 250mm)
Fixture Height (H)	A: 50mm / B: 70mm / C: 100mm



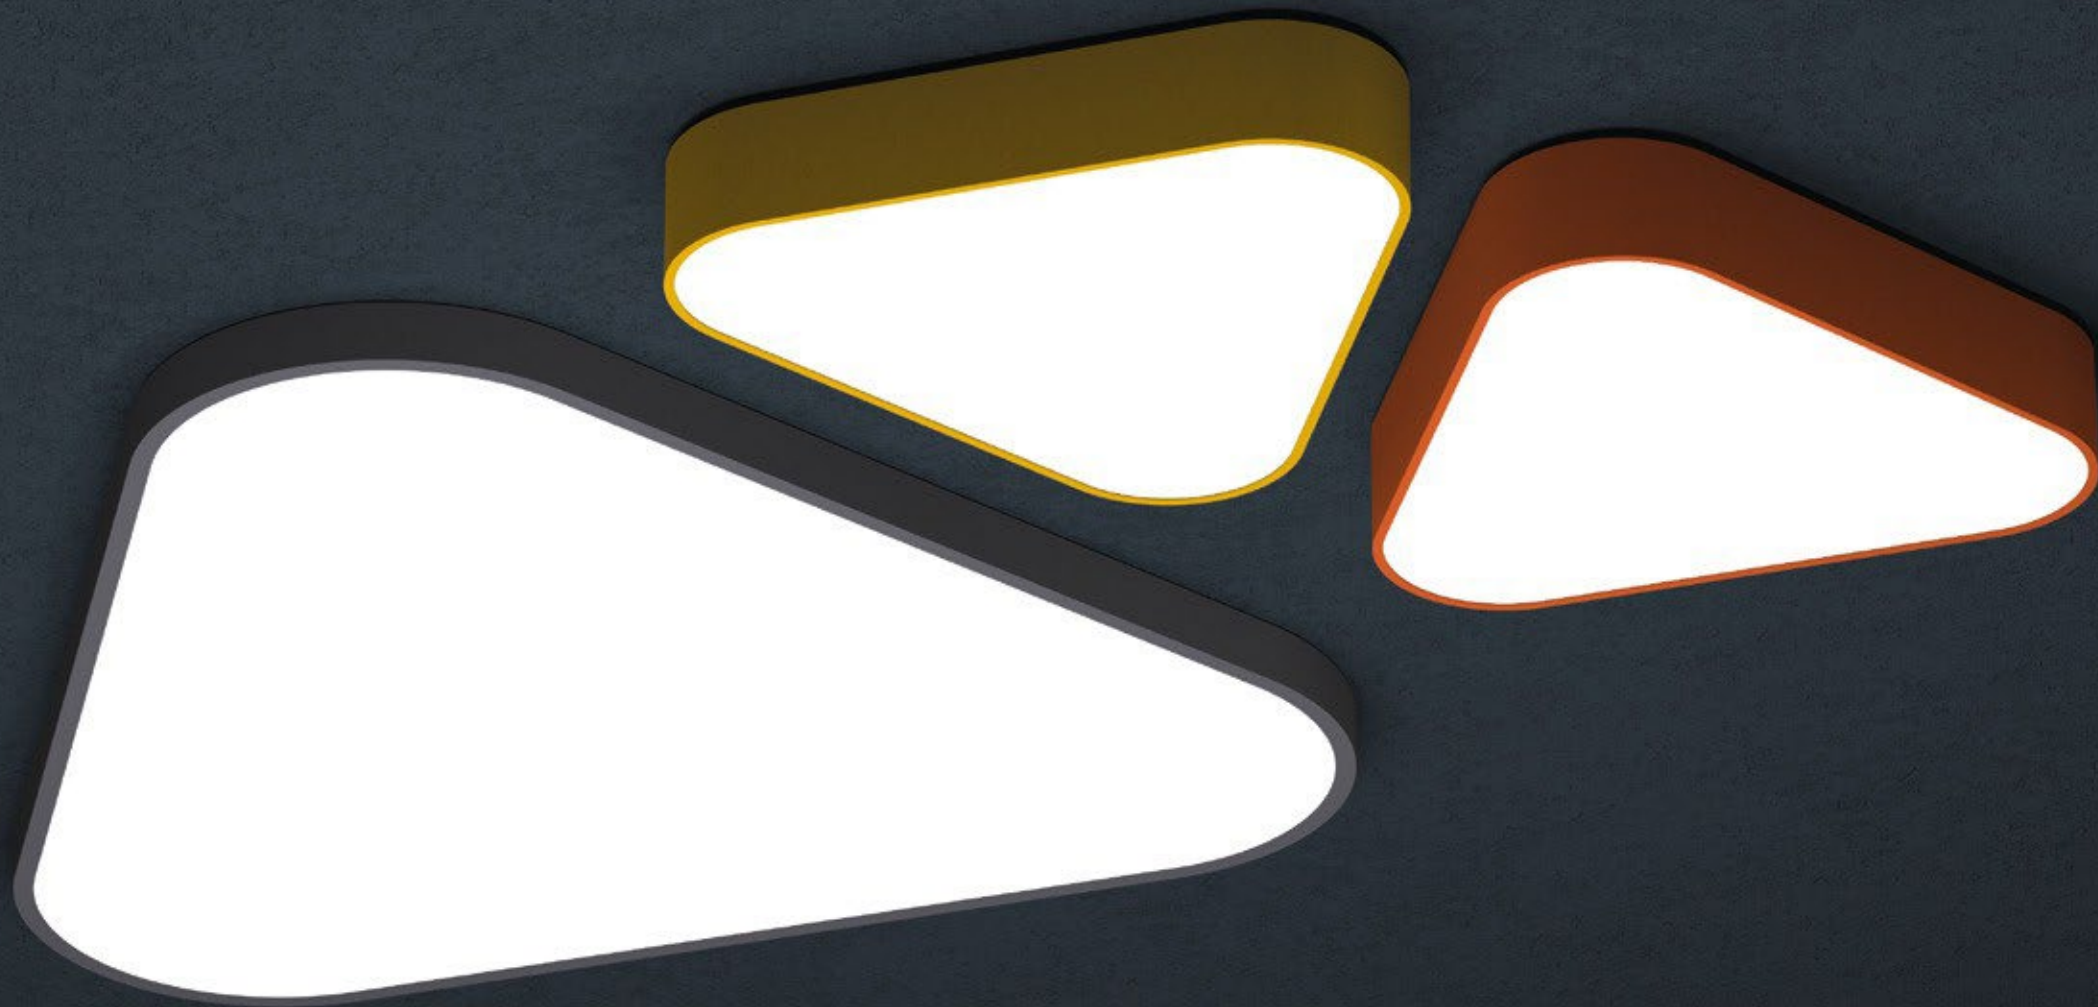

DRACO



Technical Specifications


Luminaire Specs: Power: Length A+B+C (m) x 10/12/15/18/20/23/25
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended

LED Module: LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient

Power Supply: Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9

Housing: Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating

Technical Drawing

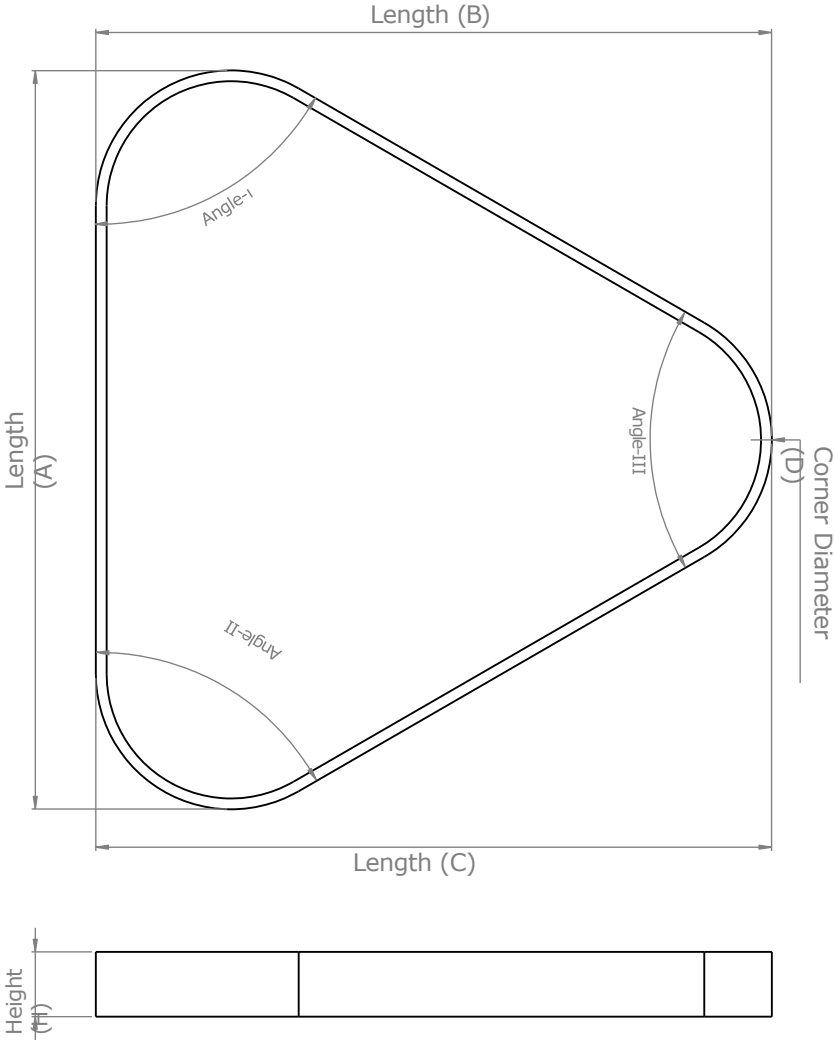

Length (A/B/C)	Customized (Min. 300mm / Max. 1200mm)
Angle (I/II/III)	Customized (30° / 45° / 60° / 75° / 90°)
Corner Diameter (D)	Customized (Min. 50mm / Max. 200mm)
Fixture Height (H)	A: 50mm / B: 70mm / C: 100mm



GEMINI



Technical Specifications


Luminaire Specs: Power: 10/15/20/25/30/35/40 W/m
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended

LED Module: LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient


Power Supply: Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9

Housing: Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating

Technical Drawing

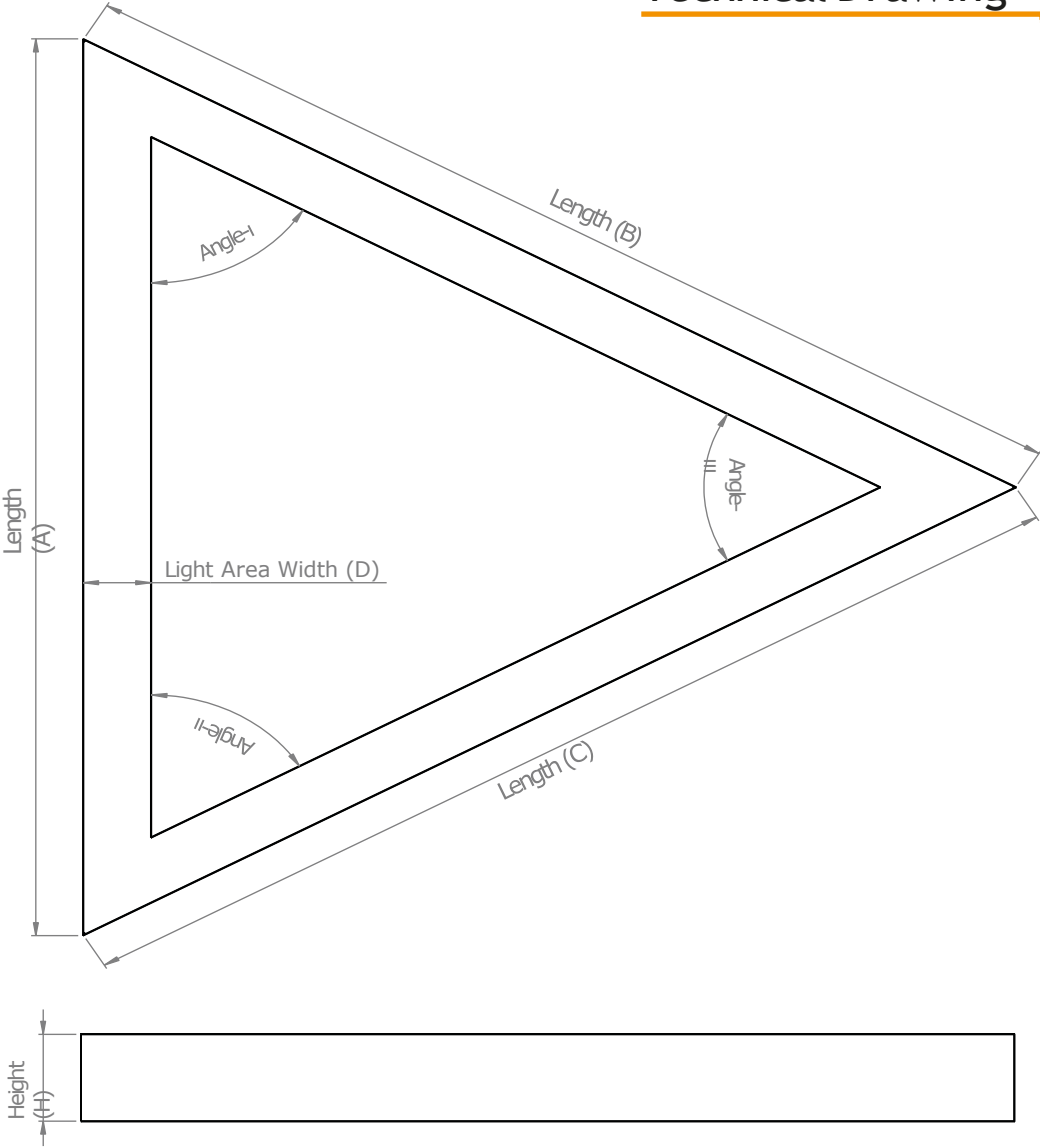

Length (A/B/C)	Customized (Min. 300mm / Max. 5000mm)
Angle (I/II/III)	Customized (30°/45°/60°/75°/90°)
Light Area Width (D)	50,8mm
Fixture Height (H)	78mm

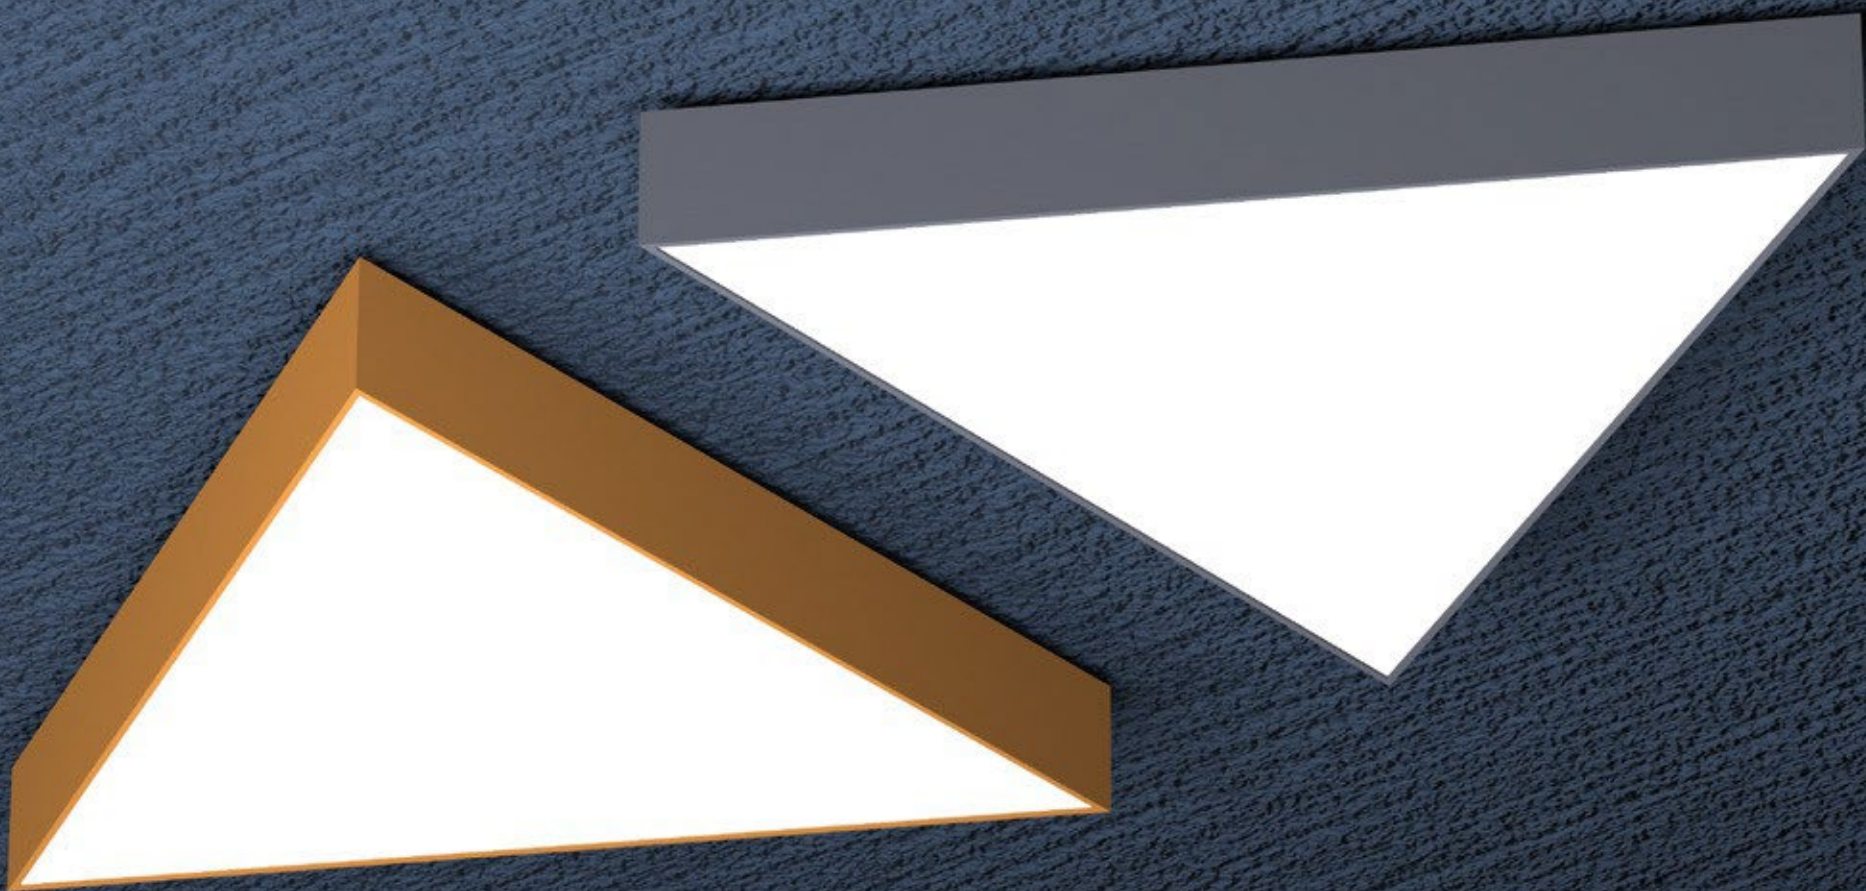

AURIGA

Technical Specifications


Luminaire Specs: Power: Length A+B+C (m) x 10/12/15/18/20/23/25/27
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended

LED Module: LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient


Power Supply: Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9

Housing: Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating

Technical Drawing

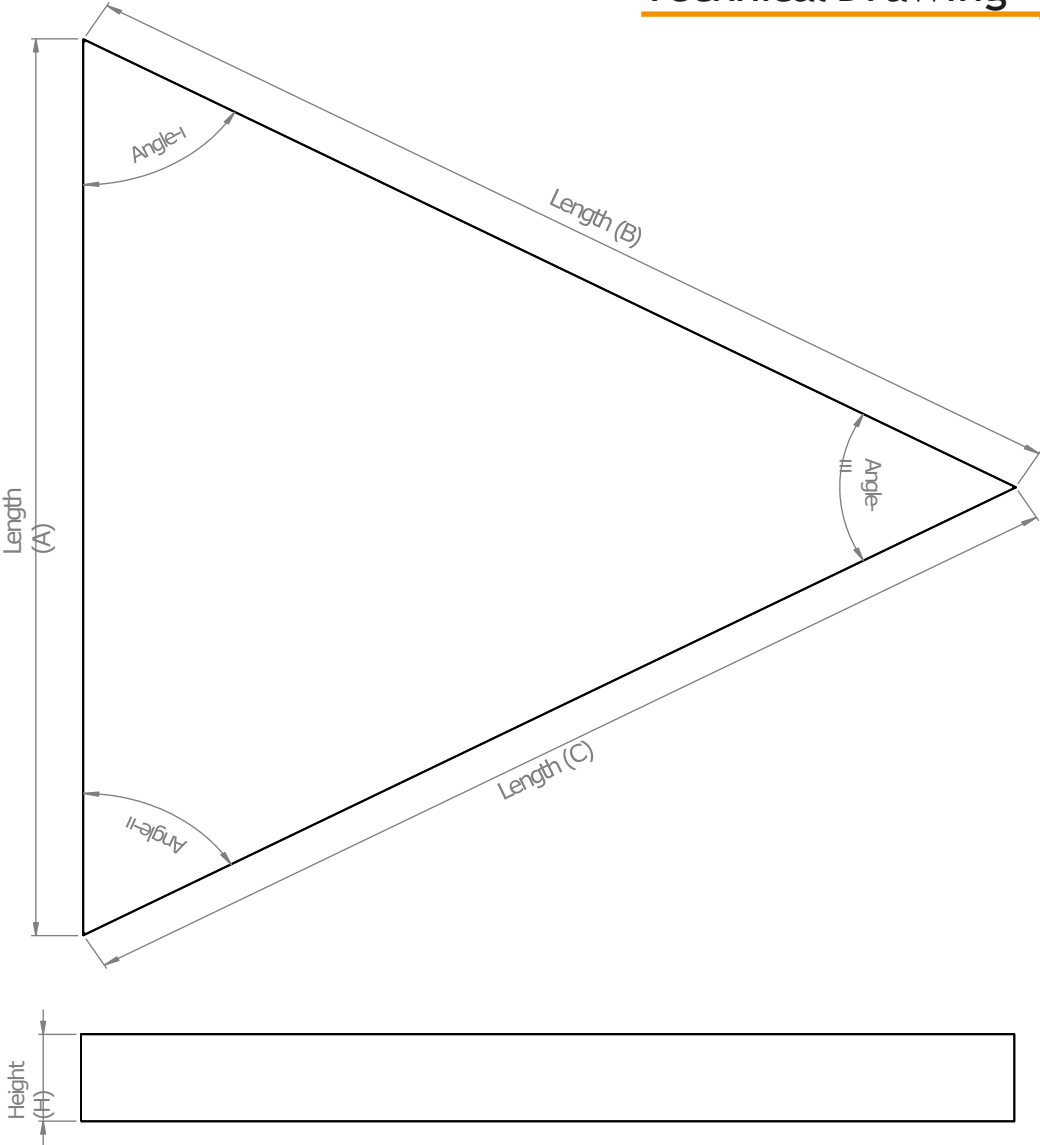

Length (A/B/C)	Customized (Min. 300mm / Max. 1200mm)
Angle (I/II/III)	Customized (30° / 45° / 60° / 75° / 90°)
Fixture Height (H)	A: 50mm / B: 70mm / C: 100mm

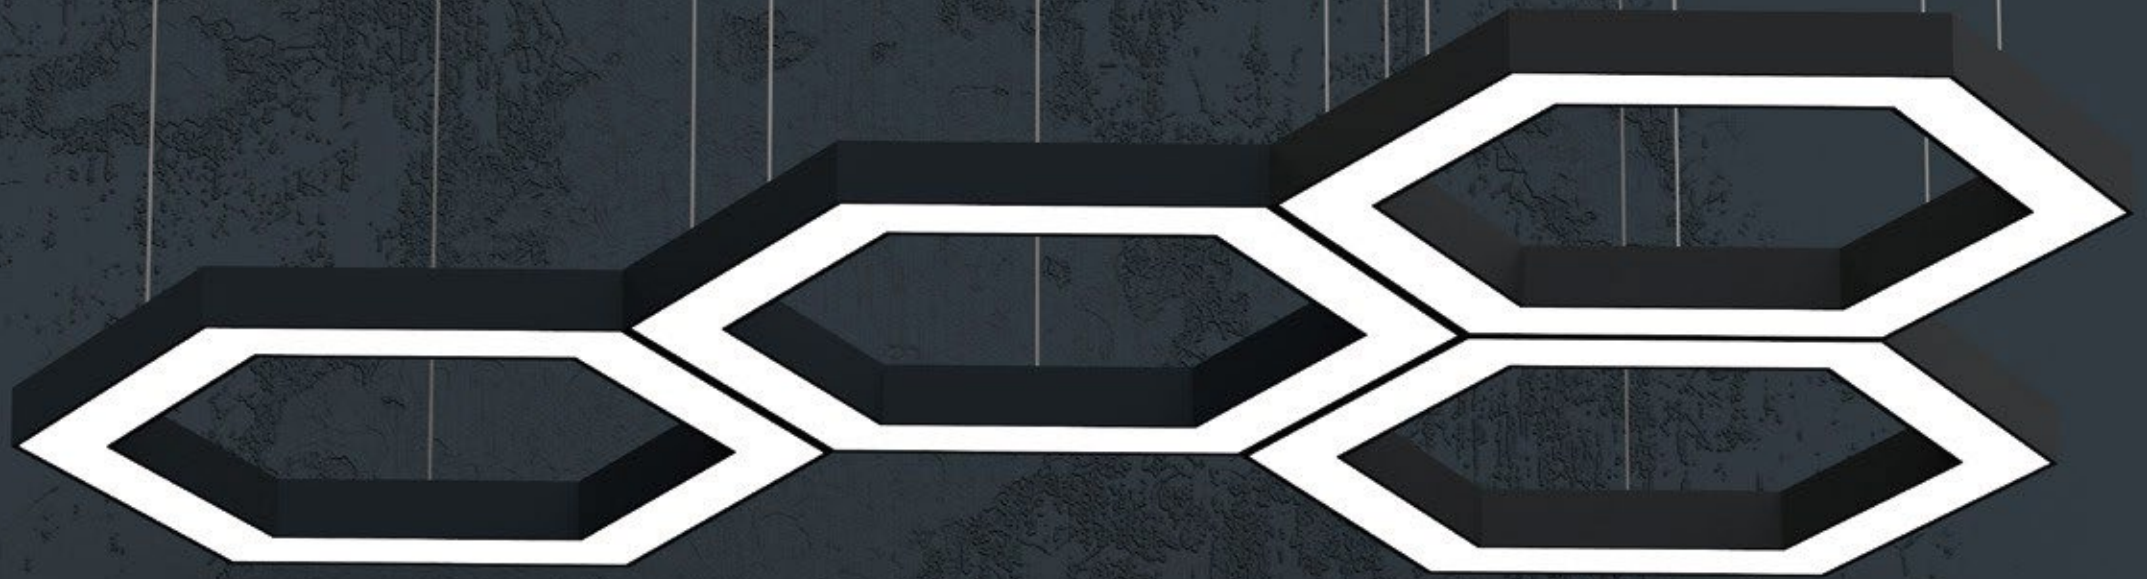


ORION




Technical Specifications

- Luminaire Specs:** Power: 10/15/20/25/30/35 W/m
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended
- LED Module:** LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient
- Power Supply:** Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9
- Housing:** Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating

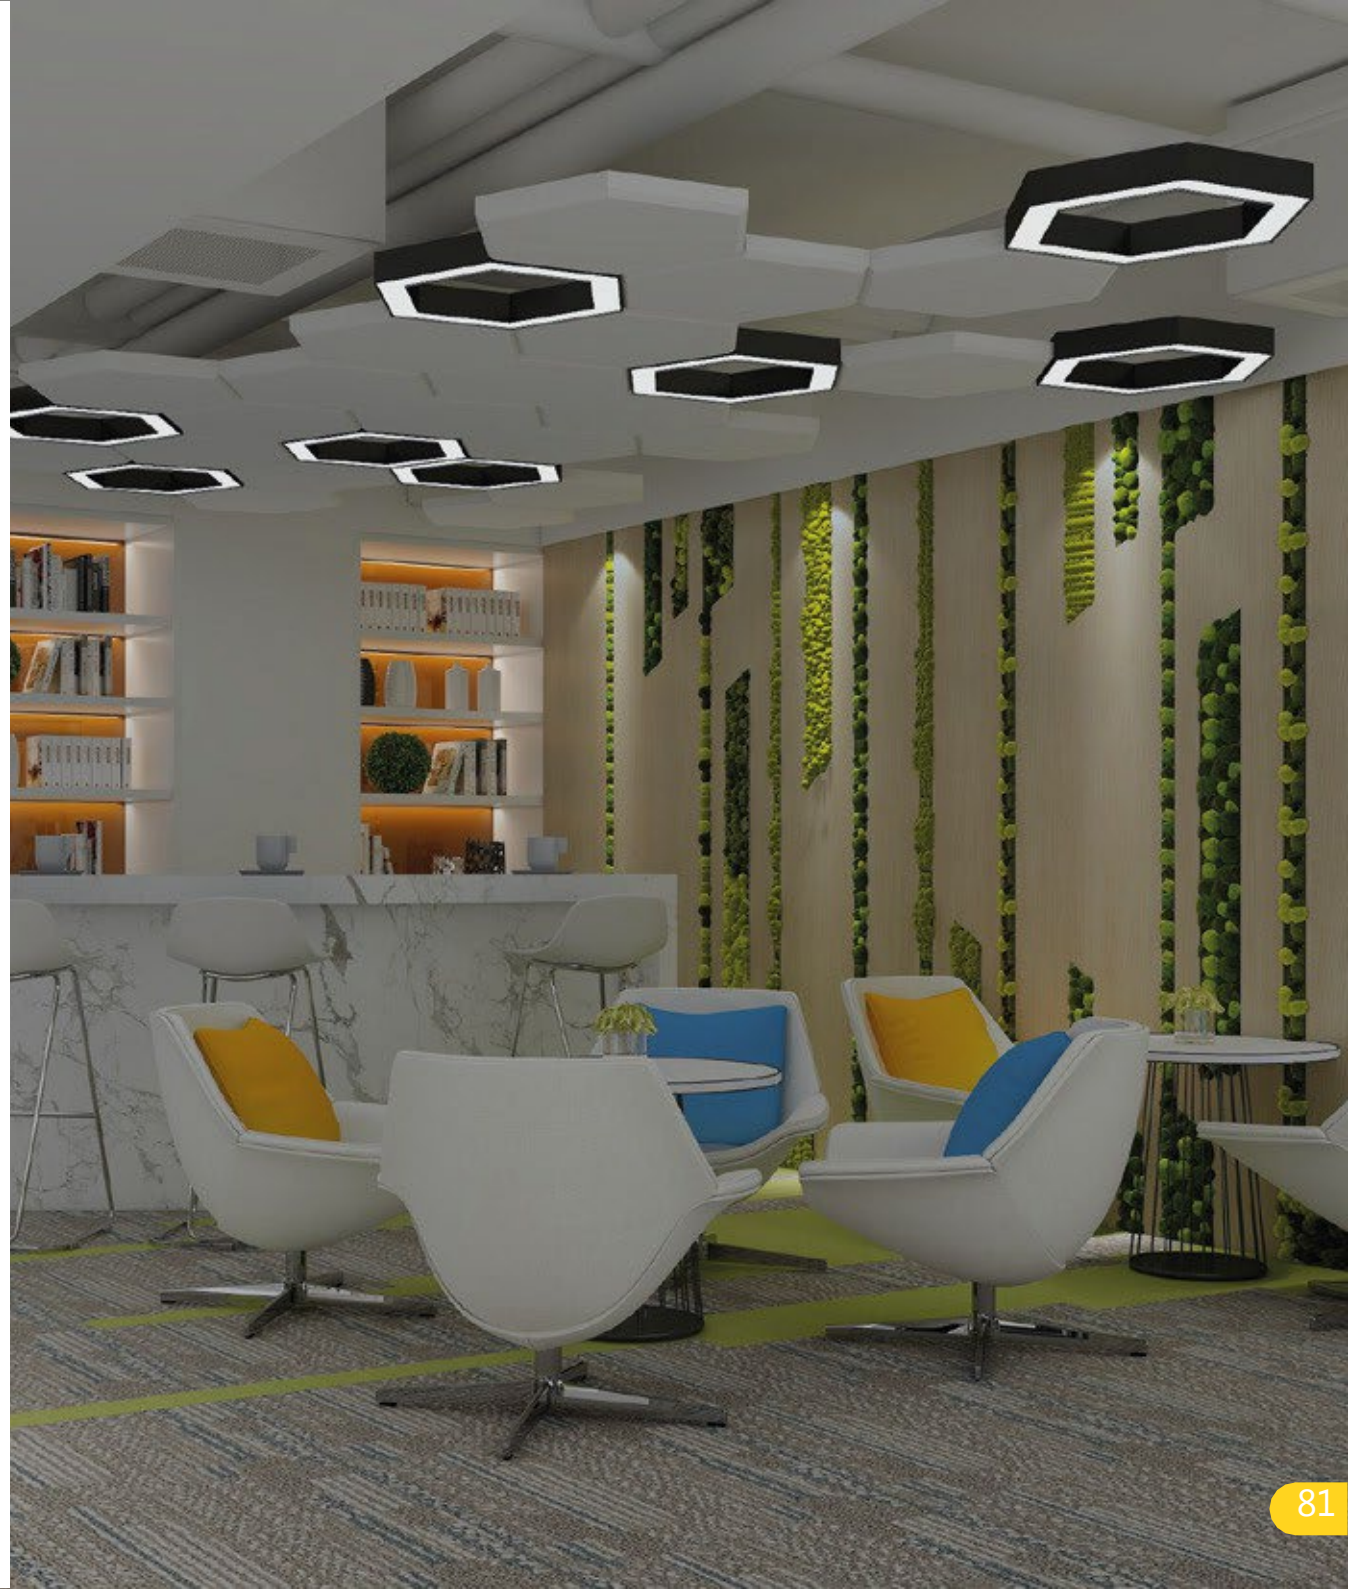



Technical Drawing

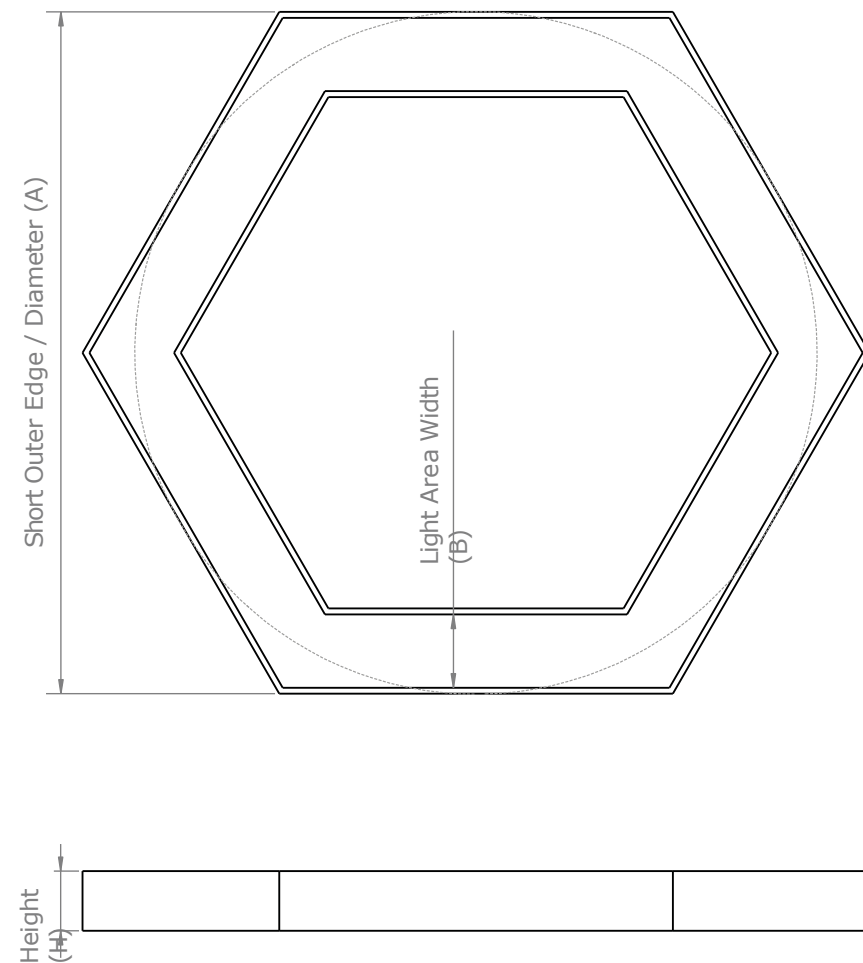


Short Outer Edge /

Diameter (A) Customized (Min. 400mm / Max. 4000mm)

Light Area Width (B) 50,8mm

Fixture Height (H) 78mm



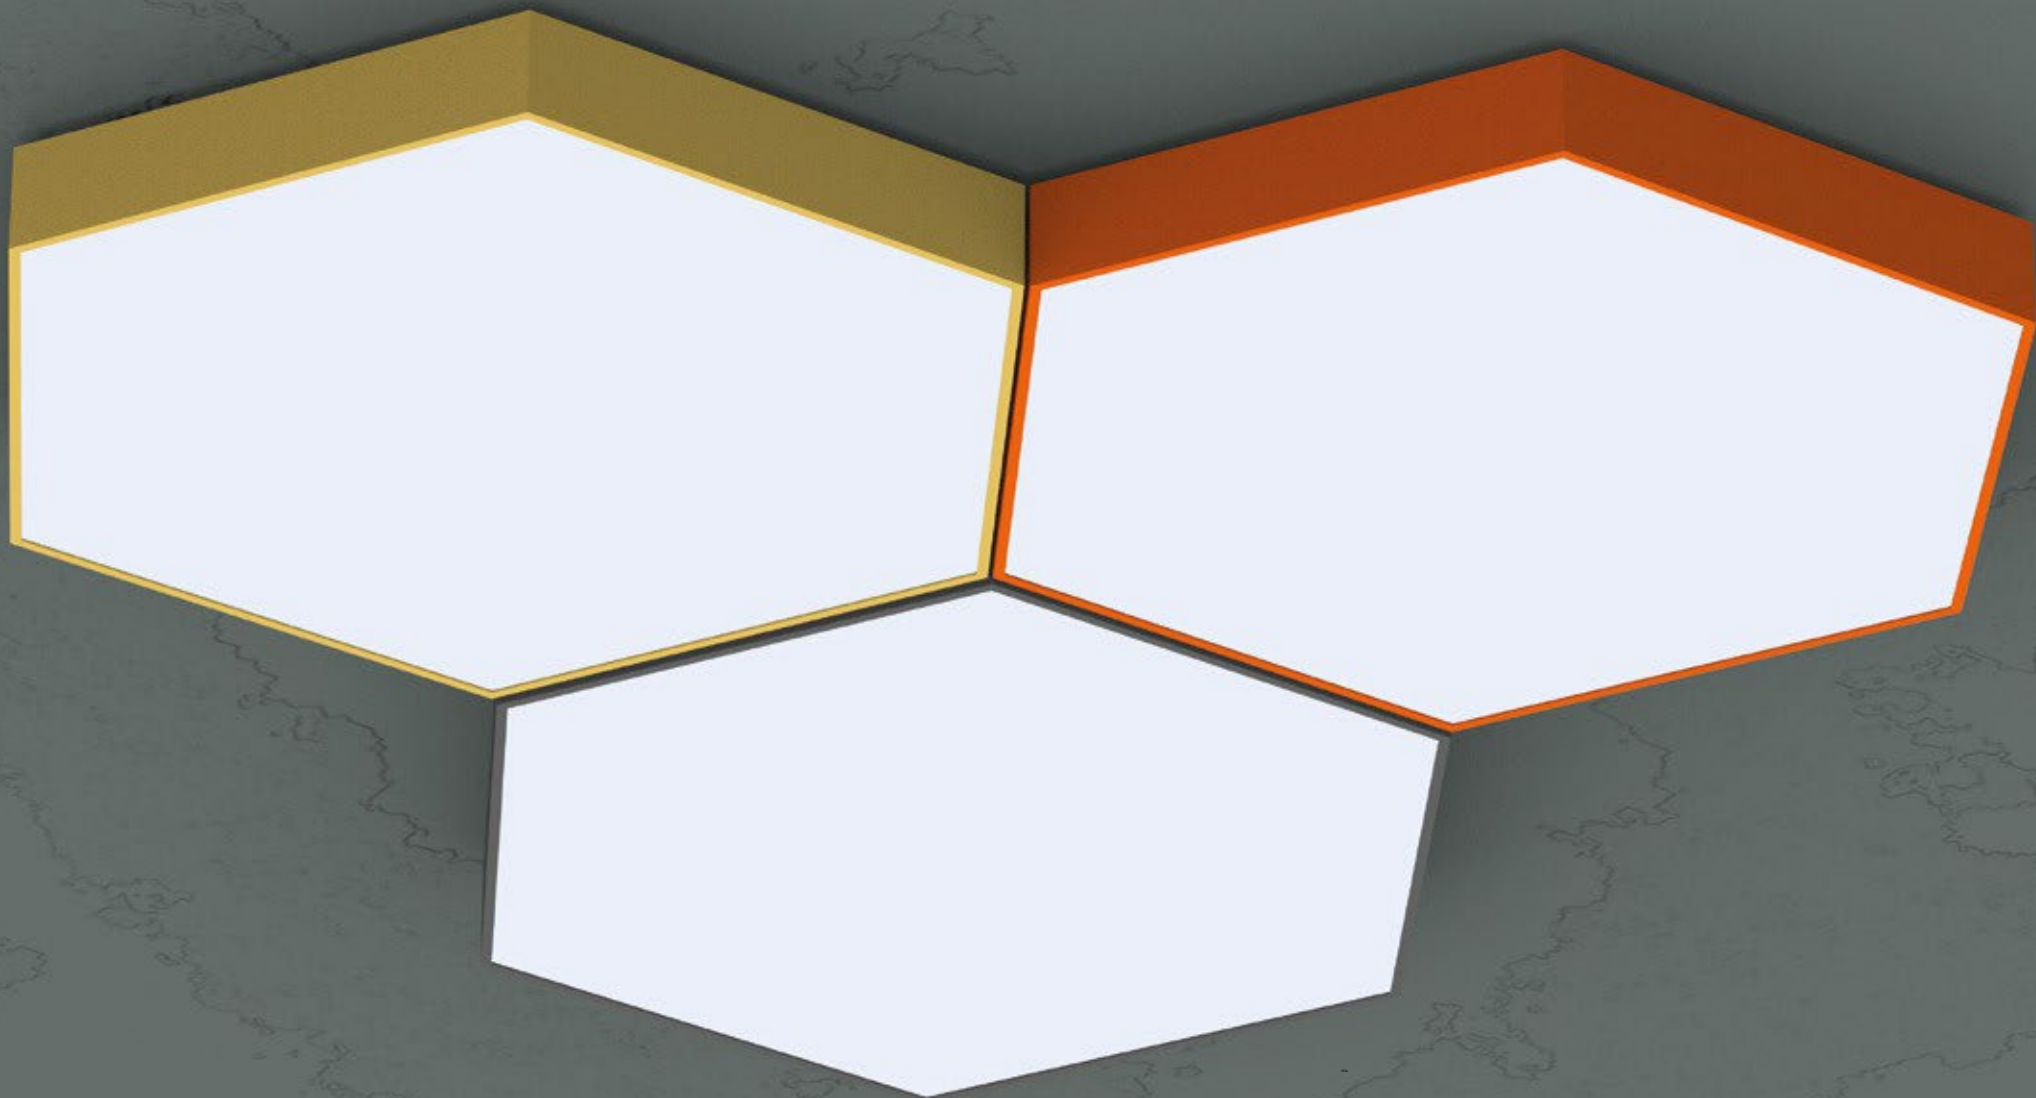

VELA




Technical Specifications

Luminaire Specs: Power: Diameter-A (m) x 40/50/60/80/100
Efficiency: >110lm/W / CRI >80 / IP40
Beam Angle: 120 Degree / Safety: Class I
Input Voltage: 220-230Vac / 50-60Hz
Ambient Temp. (Ta): -5°C — +45°C
Installation: Surface / Suspended



LED Module: LED Chip: Osram / Seoul / Lumileds
3-Step MacAdams - LM80
>60000 Hours Life Span
2700K / 3000K / 4000K / 5000K / 6500K
Metal Core PCB - White Finish
High Heat Transfer Coefficient

Power Supply: Brand: Tridonic / Philips / Osram / Eaglerise
Constant Current / ENEC Certified
>50000 Hours Life Span / PF>0,9

Housing: Aluminium Extrusion Profile
UV Protected Opal Diffuser
Finish: Electrostatic Powder Coating

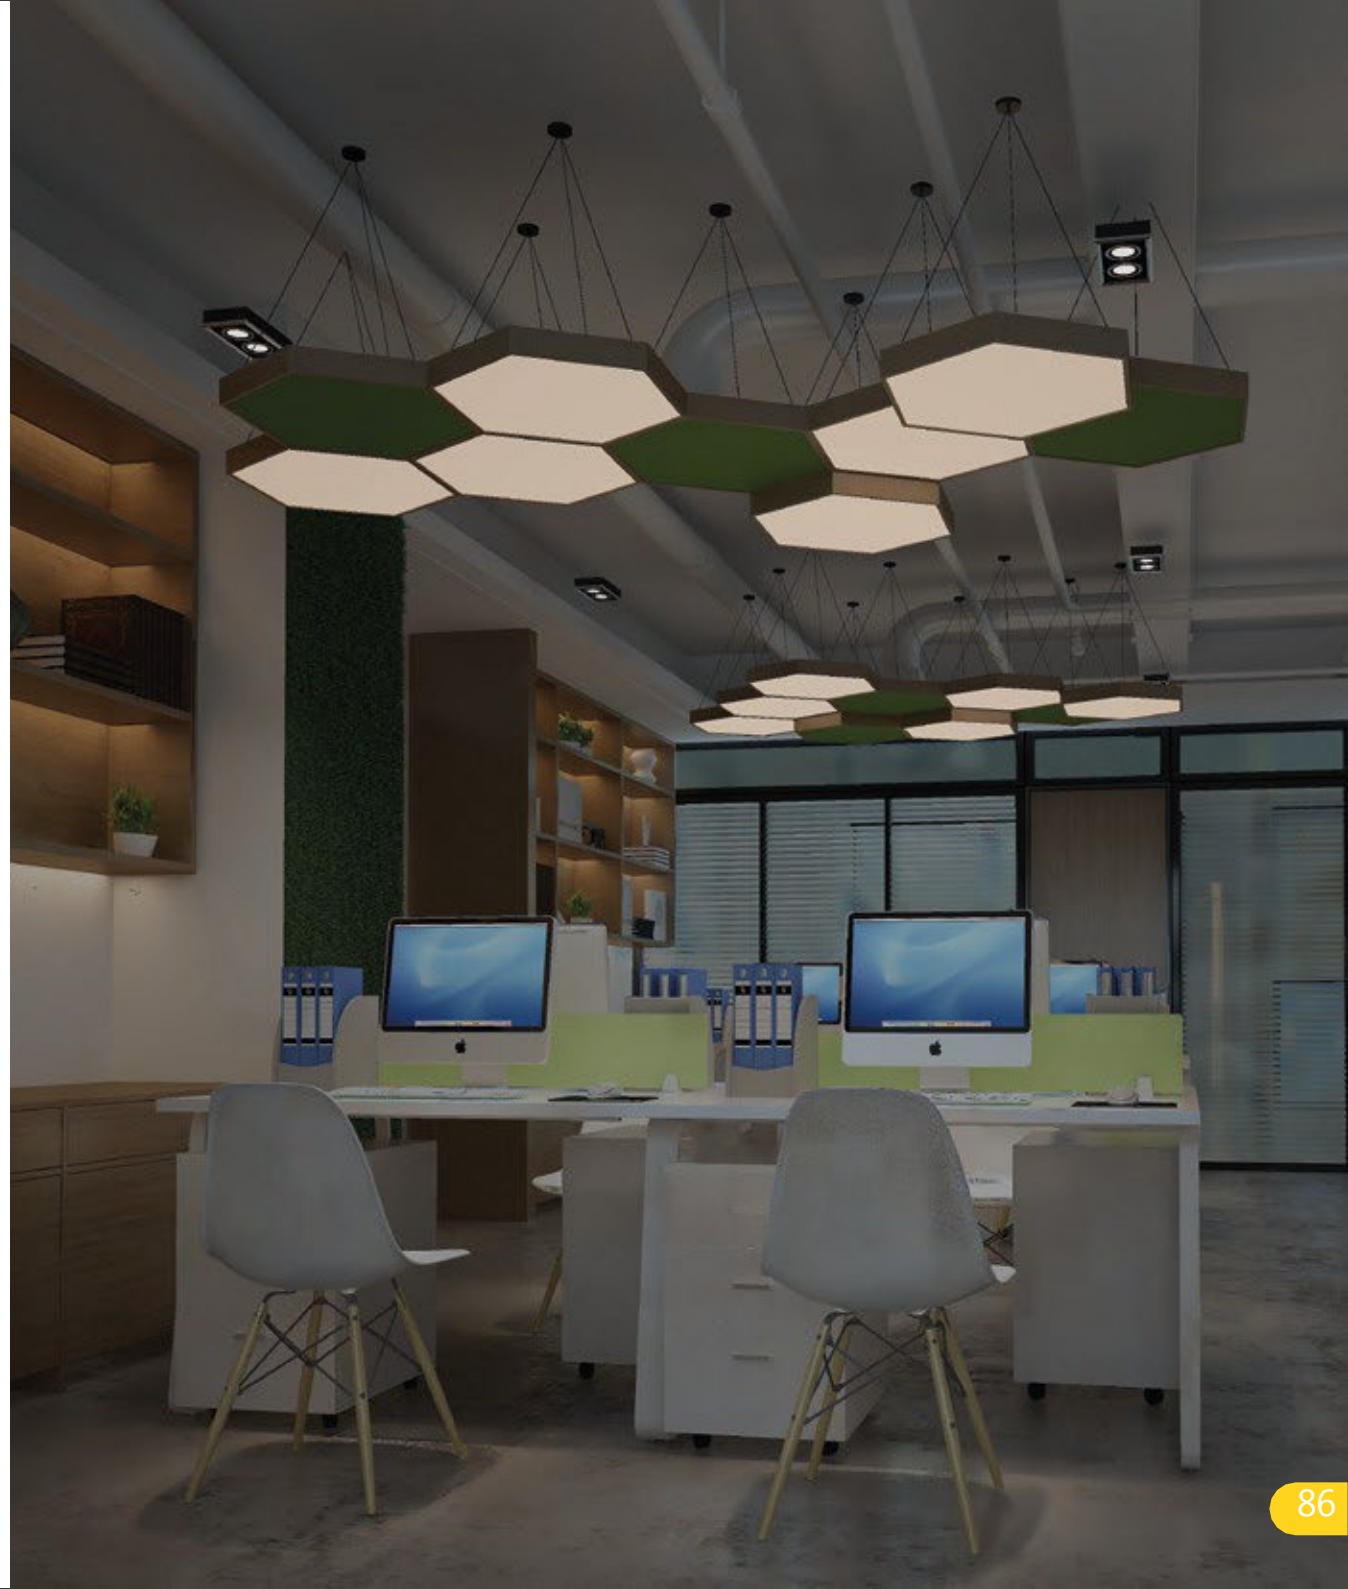

Technical Drawing

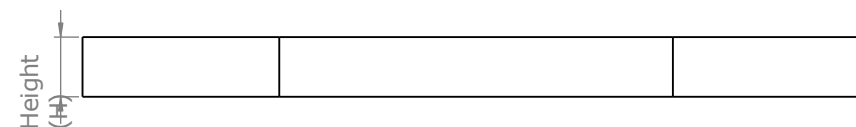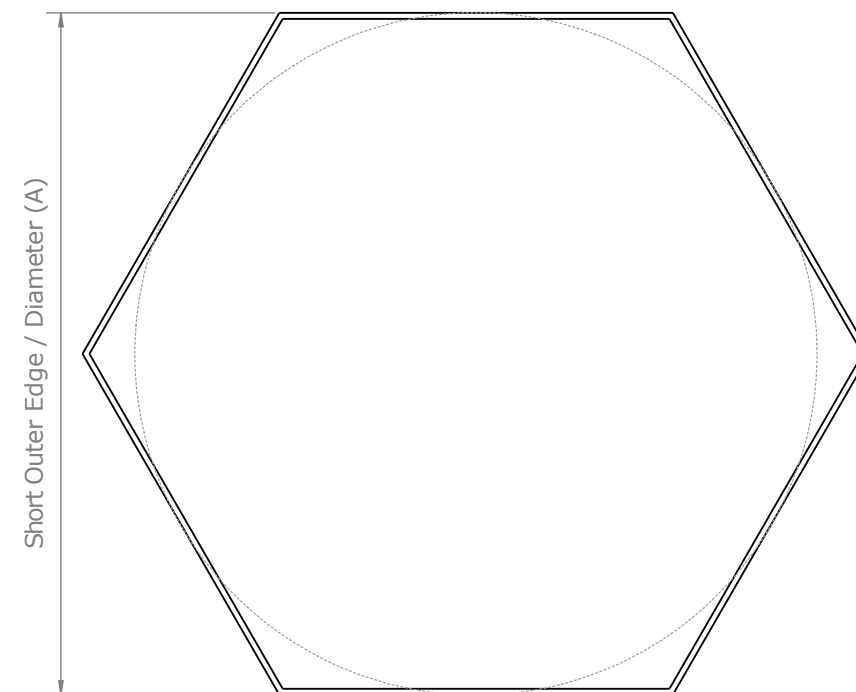

Short Outer Edge /

Diameter (A)

Customized (Min. 400mm / Max. 1200mm)

Fixture Height (H)

A: 50mm / B: 70mm / C: 100mm



Indoor Architectural LED Lighting Solutions

ZOLARIS Luminaire delivers modern indoor architectural lighting solutions designed to enhance interiors with performance, elegance, and technical precision.

From linear systems, downlights, spotlights, pendant lights, wall lights, cove lighting, and custom-made luminaires, our collection supports hotels, villas, offices, restaurants, retail spaces, showrooms, and luxury projects.

Our professional engineering team provides technical support, lighting selection, customization, and project-based solutions to meet both design and performance requirements.

Let's illuminate your next project

For inquiries, technical support, and project solutions:

Email : export@zolarisluminaire.com

Website : www.zolarisluminaire.com

Phone / WhatsApp: [+905532092060](https://wa.me/905532092060)

Address office/Factory:

Cerkesli mah Tavsancil sok no 72 Dilovası/Kocaeli
Turkey.